

Technical data sheet

Safety light curtain receiver

Part no.: 68091921
MLC310R90-2100



For illustration purposes only

Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Circuit diagrams
- Operation and display
- Suitable transmitters
- Part number code
- Notes
- Accessories

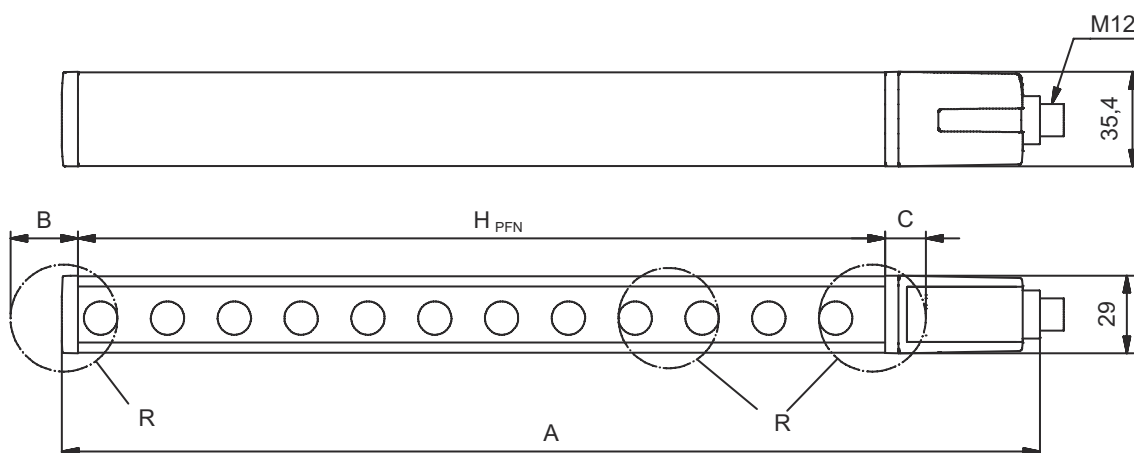


Technical data

Customs tariff number	85365019
ECLASS 5.1.4	27272704
ECLASS 8.0	27272704
ECLASS 9.0	27272704
ECLASS 10.0	27272704
ECLASS 11.0	27272704
ECLASS 12.0	27272704
ECLASS 13.0	27272704
ECLASS 14.0	27272704
ECLASS 15.0	27272704
ETIM 5.0	EC002549
ETIM 6.0	EC002549
ETIM 7.0	EC002549
ETIM 8.0	EC002549
ETIM 9.0	EC002549
ETIM 10.0	EC002549

Dimensioned drawings

All dimensions in millimeters

[illegible]

H_{PFF} Effective protective field height = 2190 mm

[illegible][illegible]

B 50 mm

[illegible]

R Effective protective field height H_{PFE} goes beyond the dimensions of the optics area to the outer borders of the circles labeled with R.

[illegible][illegible]

Function	Machine interface
Type of connection	Connector
Thread size	M12
Type	Male
Material	Metal
No. of pins	5 -pin
Encoding	A-coded
Connector housing	FE/SHIELD

Circuit diagrams

A top-down diagram of a 5-pin DIN connector. It features a circular outer shell with five pins arranged in a cross pattern. The pins are labeled with numbers 1 through 5. Pin 1 is at the top-right, pin 2 is at the top-left, pin 3 is on the left, pin 4 is at the bottom-left, and pin 5 is at the bottom-right. A ground symbol, consisting of a circle with a vertical line and horizontal bars, is labeled 'FE' and is connected to the outer shell of the connector.

• VIN1 = +24 V, VIN2 = 0 V: transmission channel C1

• VIN1 = 0 V, VIN2 = +24 V: transmission channel C2

[illegible]

LED	Display	Meaning
1	Off	Device switched off
	Red, continuous light	OSSD off.
	Red, flashing, 1 Hz	External error
	Red, flashing, 10 Hz	Internal error
	Green, flashing, 1 Hz	OSSD on, weak signal
	Green, continuous light	OSSD on
2	Off	Transmission channel C1
	Red, continuous light	OSSD off, transmission channel C2

	Part no.	Designation	Article	Description
	68090921	MLC300T90-2100	Safety light curtain transmitter	Resolution: 90 mm Protective field height: 2,100 mm Operating range: 0 ... 20 m Connection: Connector, M12, Metal, 5 -pin

[illegible]

MLC **Safety light curtain**

Note	
	↗ A list with all available device types can be found on the Leuze website at www.leuze.com.

Observe intended use!	
	⚠ The product may only be put into operation by competent persons. ⚠ Only use the product in accordance with its intended use.

Connection technology - Connection cables

[illegible]

	Part no.	Designation	Article	Description
	429393	BT-2HF	Mounting bracket set	Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 360° Material: Metal, Plastic

