




Product designation	Power contactor		
Product type designation	B115		
Contact characteristics			
Number of poles	Nr. 3		
Rated insulation voltage U_i IEC/EN	V 1000		
Rated impulse withstand voltage U_{imp}	kV 8		
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current I_{th}	A 160		
Operational current I_e			
	AC-1 ($\leq 40^\circ C$)	A	160
	AC-1 ($\leq 55^\circ C$)	A	150
	AC-1 ($\leq 70^\circ C$)	A	110
	AC-3 ($\leq 440V \leq 55^\circ C$)	A	110
	AC-4 (400V)	A	47
Rated operational power AC-3 ($T \leq 55^\circ C$)	400V	kW	61
Rated operational power AC-1 ($T \leq 40^\circ C$)	230V	kW	57
	400V	kW	98
	500V	kW	129
	690V	kW	173
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 1 poles in series	75V	A	160
	110V	A	100
	220V	A	—
	330V	A	—
	460V	A	—
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 2 poles in series	75V	A	160
	110V	A	130
	220V	A	100
	330V	A	—
	460V	A	—
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 3 poles in series	75V	A	160
	110V	A	130
	220V	A	130
	330V	A	100
	460V	A	—
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 4 poles in series	75V	A	160
	110V	A	130
	220V	A	130


	330V	A	130
	460V	A	100
IEC max current le in DC3-DC5 with L/R ≤ 15ms with 1 poles in series			
	75V	A	140
	110V	A	70
	220V	A	—
	330V	A	—
	460V	A	—
IEC max current le in DC3-DC5 with L/R ≤ 15ms with 2 poles in series			
	75V	A	140
	110V	A	100
	220V	A	80
	330V	A	—
	460V	A	—
IEC max current le in DC3-DC5 with L/R ≤ 15ms with 3 poles in series			
	75V	A	140
	110V	A	120
	220V	A	100
	330V	A	80
	460V	A	—
IEC max current le in DC3-DC5 with L/R ≤ 15ms with 4 poles in series			
	75V	A	140
	110V	A	120
	220V	A	120
	330V	A	120
	460V	A	80
Short-time allowable current for 10s (IEC/EN60947-1)			A 1100
Protection fuse			
	gG (IEC)	A	200
	aM (IEC)	A	125
Making capacity (RMS value)			A 1300
Breaking capacity at voltage			
	440V	A	1300
	500V	A	1100
	690V	A	880
Resistance per pole (average value)			m? 0.3
Power dissipation per pole (average value)			
	I _{th}	W	7.7
	AC3	W	4
Tightening torque for terminals			
	min	Nm	10
	max	Nm	10
	min	lbin	7.4
	max	lbin	7.4
Max number of wires simultaneously connectable			Nr. 2
Conductor section			
	AWG/Kcmil		
		max	2/0
Power terminal protection according to IEC/EN 60529			IP00
Mechanical features			
Operating position			
	normal allowable		Vertical plan ±30°

Fixing	Screw					
Weight	g 5320					
Conductor section						
AWG/kcmil conductor section						
max 2/0						
Operations						
Mechanical life cycles 10000000						
Electrical life cycles 1100000						
Safety related data						
Performance level B10d according to EN/ISO 13489-1						
rated load cycles 1100000						
mechanical load cycles 10000000						
Mirror contacts according to IEC/EN 609474-4-1 yes						
EMC compatibility yes						
AC coil operating						
Rated AC voltage at 50/60Hz	V 24					
AC operating voltage						
of 50/60Hz coil powered at 50Hz						
pick-up						
		min %Us	80			
		max %Us	110			
drop-out						
		min %Us	20			
		max %Us	60			
of 50/60Hz coil powered at 60Hz						
pick-up						
		min %Us	80			
		max %Us	110			
drop-out						
		min %Us	20			
		max %Us	60			
of 60Hz coil powered at 60Hz						
pick-up						
		min %Us	80			
		max %Us	110			
drop-out						
		min %Us	20			
		max %Us	60			
AC average coil consumption at 20°C						
of 50/60Hz coil powered at 50Hz						
		in-rush VA	300			
		holding VA	10			
of 50/60Hz coil powered at 60Hz						
		in-rush VA	300			
		holding VA	10			
Dissipation at holding ≤20°C 50Hz						
		W	10			
DC coil operating						
DC rated control voltage	V 24					
DC operating voltage						
pick-up						
		min %Us	80			
		max %Us	110			
drop-out						

		min	%Us	20
		max	%Us	60
Average coil consumption $\leq 20^{\circ}\text{C}$				
	in-rush	W		300
	holding	W		10
Max cycles frequency				
Mechanical operation			cycles/h	2400
Operating times				
Average time for Us control				
in AC				
	Closing NO			
		min	ms	60
		max	ms	100
	Opening NO			
		min	ms	25
		max	ms	60
in DC				
	Closing NO			
		min	ms	60
		max	ms	100
	Opening NO			
		min	ms	25
		max	ms	60
UL technical data				
Full-load current (FLA) for three-phase AC motor				
	at 480V	A		96
	at 600V	A		99
Yielded mechanical performance				
for three-phase AC motor				
	200/208V	HP		30
	220/230V	HP		40
	460/480V	HP		75
	575/600V	HP		100
General USE				
Contactor				
	AC current	A		160
Short-circuit protection fuse, 600V				
Standard fault				
	Short circuit current	kA		5
	Fuse rating	A		500
	Fuse class			RK5
Ambient conditions				
Temperature				
	Operating temperature			
		min	$^{\circ}\text{C}$	-50
		max	$^{\circ}\text{C}$	70
	Storage temperature			
		min	$^{\circ}\text{C}$	-60
		max	$^{\circ}\text{C}$	80
Max altitude			m	3000
Resistance & Protection				
Pollution degree				3
Dimensions				

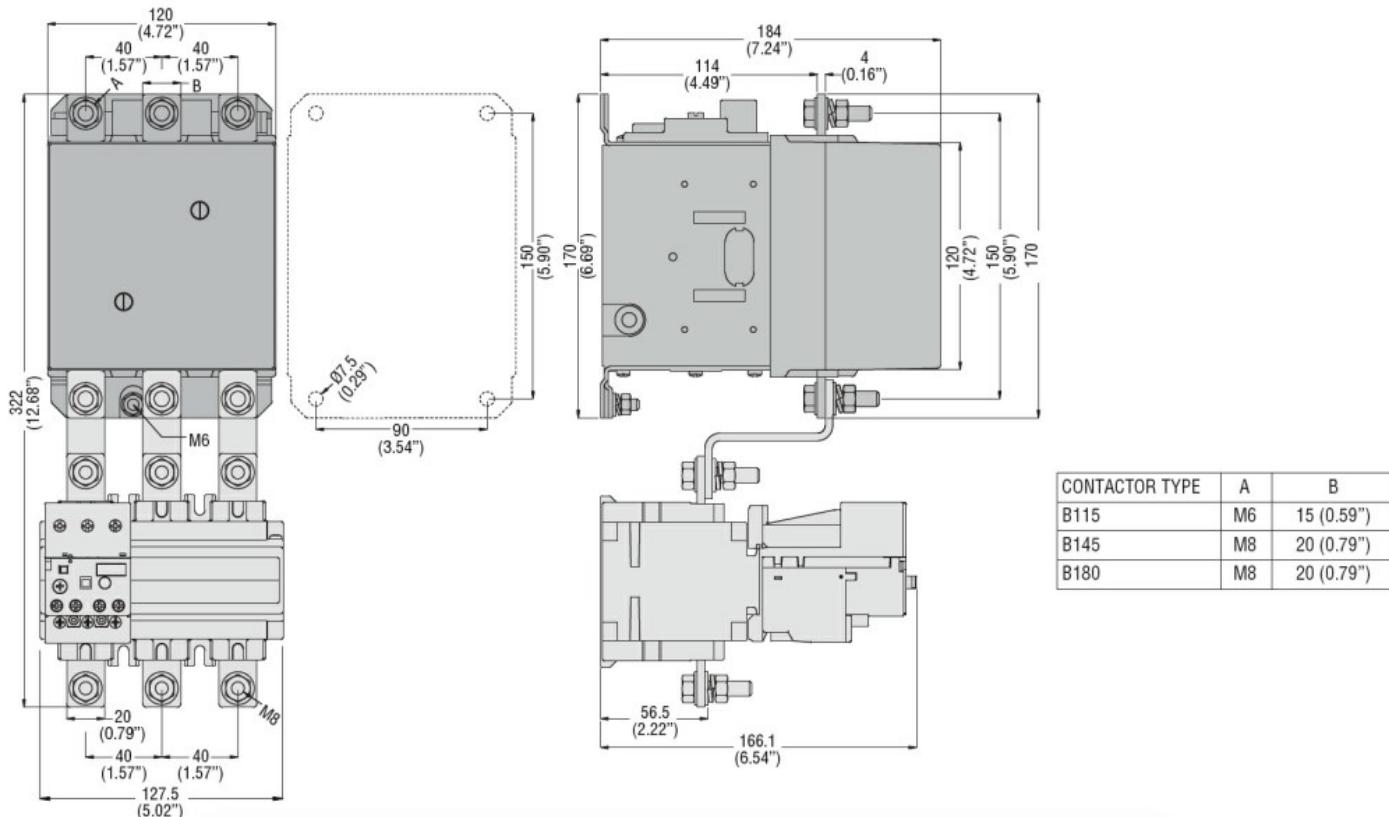

Wiring diagrams

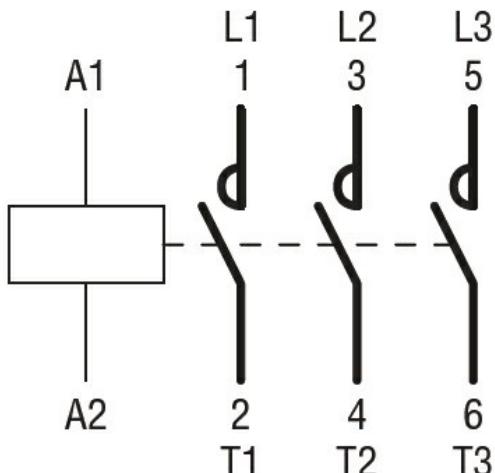

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching