



Product designation Power contactor
Product type designation B115

Contact characteristics

Number of poles	Nr.	4
Rated insulation voltage U_i IEC/EN	V	1000
Rated impulse withstand voltage U_{imp}	kV	8
Operational frequency	min	Hz 25
	max	Hz 400
IEC Conventional free air thermal current I_{th}	A	160
Operational current I_e		
	AC-1 ($\leq 40^\circ\text{C}$)	A 160
	AC-1 ($\leq 55^\circ\text{C}$)	A 150
	AC-1 ($\leq 70^\circ\text{C}$)	A 110
	AC-3 ($\leq 440\text{V } \leq 55^\circ\text{C}$)	A 110
	AC-4 (400V)	A 47
Rated operational power AC-1 ($T \leq 40^\circ\text{C}$)		
	230V	kW 57
	400V	kW 98
	500V	kW 129
	690V	kW 173
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 1 poles in series		
	75V	A 160
	110V	A 100
	220V	A –
	330V	A –
	460V	A –
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 2 poles in series		
	75V	A 160
	110V	A 130
	220V	A 100
	330V	A –
	460V	A –
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 3 poles in series		
	75V	A 160
	110V	A 130
	220V	A 130
	330V	A 100
	460V	A –
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 4 poles in series		
	75V	A 160
	110V	A 130
	220V	A 130
	330V	A 130
	460V	A 100

IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 1 poles in series

75V	A	140
110V	A	70
220V	A	—
330V	A	—
460V	A	—

IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 2 poles in series

75V	A	140
110V	A	100
220V	A	80
330V	A	—
460V	A	—

IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 3 poles in series

75V	A	140
110V	A	120
220V	A	100
330V	A	80
460V	A	—

IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 4 poles in series

75V	A	140
110V	A	120
220V	A	120
330V	A	120
460V	A	80

Short-time allowable current for 10s (IEC/EN60947-1)

A	1100
---	------

Protection fuse

gG (IEC)	A	200
aM (IEC)	A	125

Making capacity (RMS value)

A	1300
---	------

Breaking capacity at voltage

440V	A	1300
500V	A	1100
690V	A	880

Resistance per pole (average value)

m?	0.3
----	-----

Power dissipation per pole (average value)

I_{th}	W	7.7
AC3	W	4

Tightening torque for terminals

min	Nm	10
max	Nm	10
min	lbin	7.4
max	lbin	7.4

Max number of wires simultaneously connectable

Nr.	2
-----	---

Conductor section

AWG/Kcmil

max	2/0
-----	-----

Power terminal protection according to IEC/EN 60529

IP00

Mechanical features

Operating position

normal allowable	Vertical plan $\pm 30^\circ$
---------------------	---------------------------------

Fixing

Screw

Weight

g	6180
---	------

Conductor section

AWG/kcmil conductor section

max 2/0

Operations

Mechanical life cycles 10000000

Electrical life cycles 1100000

Safety related data

Performance level B10d according to EN/ISO 13489-1

rated load mechanical load cycles cycles 1100000 10000000

Mirror contacts according to IEC/EN 60947-4-1 yes

EMC compatibility yes

AC coil operating

Rated AC voltage at 50/60Hz V 24

AC operating voltage

of 50/60Hz coil powered at 50Hz
pick-up

min %Us 80
max %Us 110

drop-out

min %Us 20
max %Us 60

of 50/60Hz coil powered at 60Hz
pick-up

min %Us 80
max %Us 110

drop-out

min %Us 20
max %Us 60

of 60Hz coil powered at 60Hz
pick-up

min %Us 80
max %Us 110

drop-out

min %Us 20
max %Us 60

AC average coil consumption at 20°C

of 50/60Hz coil powered at 50Hz

in-rush VA 300
holding VA 10

of 50/60Hz coil powered at 60Hz

in-rush VA 300
holding VA 10

Dissipation at holding ≤20°C 50Hz W 10

DC coil operating

DC rated control voltage V 24

DC operating voltage

pick-up


min %Us 80
max %Us 110

drop-out

min %Us 20
max %Us 60


Average coil consumption ≤20°C

		in-rush	W	300
		holding	W	10
Max cycles frequency				
Mechanical operation		cycles/h		2400
Operating times				
Average time for Us control				
	in AC			
		Closing NO		
		min	ms	60
		max	ms	100
		Opening NO		
		min	ms	25
		max	ms	60
	in DC			
		Closing NO		
		min	ms	60
		max	ms	100
		Opening NO		
		min	ms	25
		max	ms	60
UL technical data				
Full-load current (FLA) for three-phase AC motor				
		at 480V	A	96
		at 600V	A	99
Yielded mechanical performance				
	for three-phase AC motor			
		200/208V	HP	30
		220/230V	HP	40
		460/480V	HP	75
		575/600V	HP	100
General USE				
	Contactor			
		AC current	A	160
Short-circuit protection fuse, 600V				
	Standard fault			
		Short circuit current	kA	5
		Fuse rating	A	500
		Fuse class		RK5
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-50
		max	°C	70
	Storage temperature			
		min	°C	-60
		max	°C	80
Max altitude			m	3000
Resistance & Protection				
Pollution degree				3
Dimensions				

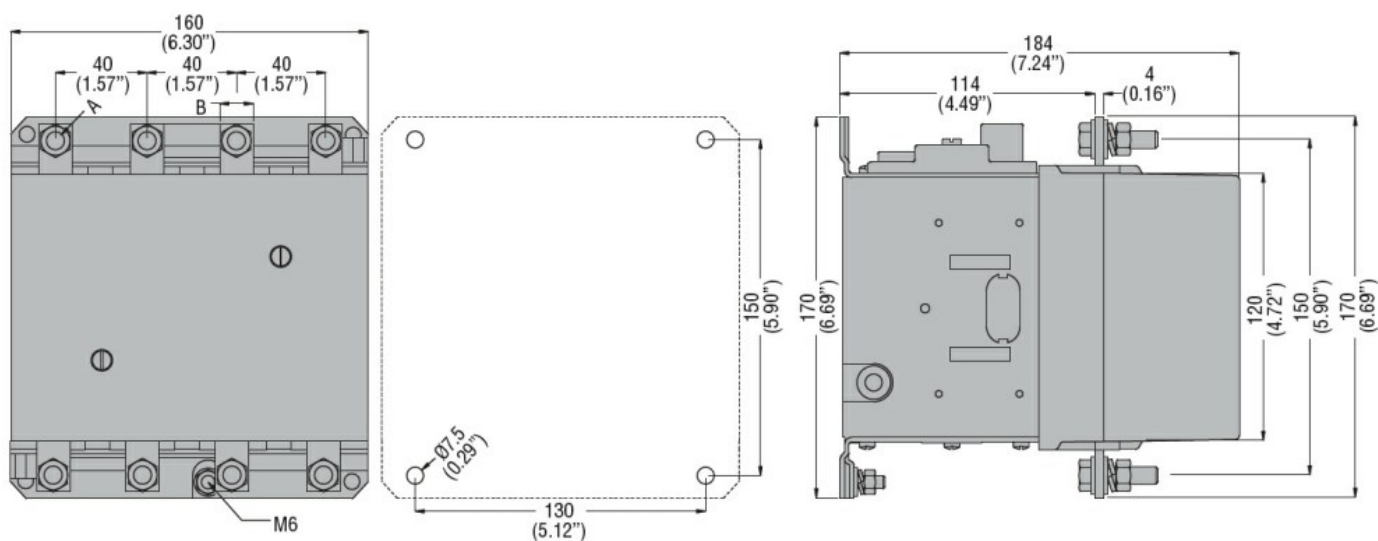

CONTACTOR TYPE	A	B
B115	M6	15 (0.59'')
B145	M8	20 (0.79'')
B180	M8	20 (0.79'')

Wiring diagrams

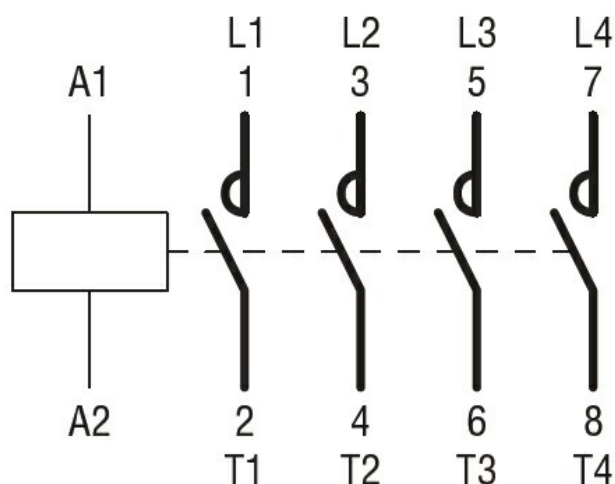

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1
CSA C22.2 n° 60947-4-1
IEC/EN 60947-1
IEC/EN 60947-4-1
UL 60947-1
UL 60947-4-1

Certificates

CCC
cULus
EAC

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching