



| | | | |
|---|--------------------------------------|------|-----|
| Product designation | Power contactor | | |
| Product type designation | B115 | | |
| Contact characteristics | | | |
| Number of poles | Nr. | 3 | |
| Rated insulation voltage U_i IEC/EN | V | 1000 | |
| Rated impulse withstand voltage U_{imp} | kV | 8 | |
| Operational frequency | min | Hz | 25 |
| | max | Hz | 400 |
| IEC Conventional free air thermal current I_{th} | | A | 160 |
| Operational current I_e | | | |
| | AC-1 ($\leq 40^\circ C$) | A | 160 |
| | AC-1 ($\leq 55^\circ C$) | A | 150 |
| | AC-1 ($\leq 70^\circ C$) | A | 110 |
| | AC-3 ($\leq 440V \leq 55^\circ C$) | A | 110 |
| | AC-4 (400V) | A | 47 |
| Rated operational power AC-3 ($T \leq 55^\circ C$) | 400V | kW | 61 |
| Rated operational power AC-1 ($T \leq 40^\circ C$) | 230V | kW | 57 |
| | 400V | kW | 98 |
| | 500V | kW | 129 |
| | 690V | kW | 173 |
| IEC max current I_e in DC1 with $L/R \leq 1ms$ with 1 poles in series | 75V | A | 160 |
| | 110V | A | 100 |
| | 220V | A | — |
| | 330V | A | — |
| | 460V | A | — |
| IEC max current I_e in DC1 with $L/R \leq 1ms$ with 2 poles in series | 75V | A | 160 |
| | 110V | A | 130 |
| | 220V | A | 100 |
| | 330V | A | — |
| | 460V | A | — |
| IEC max current I_e in DC1 with $L/R \leq 1ms$ with 3 poles in series | 75V | A | 160 |
| | 110V | A | 130 |
| | 220V | A | 130 |
| | 330V | A | 100 |
| | 460V | A | — |
| IEC max current I_e in DC1 with $L/R \leq 1ms$ with 4 poles in series | 75V | A | 160 |
| | 110V | A | 130 |
| | 220V | A | 130 |

| | | | |
|--|---------------------|------|-----------------------|
| | 330V | A | 130 |
| | 460V | A | 100 |
| IEC max current le in DC3-DC5 with L/R ≤ 15ms with 1 poles in series | | | |
| | 75V | A | 140 |
| | 110V | A | 70 |
| | 220V | A | — |
| | 330V | A | — |
| | 460V | A | — |
| IEC max current le in DC3-DC5 with L/R ≤ 15ms with 2 poles in series | | | |
| | 75V | A | 140 |
| | 110V | A | 100 |
| | 220V | A | 80 |
| | 330V | A | — |
| | 460V | A | — |
| IEC max current le in DC3-DC5 with L/R ≤ 15ms with 3 poles in series | | | |
| | 75V | A | 140 |
| | 110V | A | 120 |
| | 220V | A | 100 |
| | 330V | A | 80 |
| | 460V | A | — |
| IEC max current le in DC3-DC5 with L/R ≤ 15ms with 4 poles in series | | | |
| | 75V | A | 140 |
| | 110V | A | 120 |
| | 220V | A | 120 |
| | 330V | A | 120 |
| | 460V | A | 80 |
| Short-time allowable current for 10s (IEC/EN60947-1) | | | A 1100 |
| Protection fuse | | | |
| | gG (IEC) | A | 200 |
| | aM (IEC) | A | 125 |
| Making capacity (RMS value) | | | A 1300 |
| Breaking capacity at voltage | | | |
| | 440V | A | 1300 |
| | 500V | A | 1100 |
| | 690V | A | 880 |
| Resistance per pole (average value) | | | m? 0.3 |
| Power dissipation per pole (average value) | | | |
| | I _{th} | W | 7.7 |
| | AC3 | W | 4 |
| Tightening torque for terminals | | | |
| | min | Nm | 10 |
| | max | Nm | 10 |
| | min | lbin | 7.4 |
| | max | lbin | 7.4 |
| Max number of wires simultaneously connectable | | | Nr. 2 |
| Conductor section | | | |
| | AWG/Kcmil | | |
| | | max | 2/0 |
| Power terminal protection according to IEC/EN 60529 | | | IP00 |
| Mechanical features | | | |
| Operating position | | | |
| | normal allowable | | Vertical plan ±30° |

| | | |
|--|-----------------|-----------------|
| Fixing | | Screw |
| Weight | g | 5950 |
| Conductor section | | |
| AWG/kcmil conductor section | max | 2/0 |
| Operations | | |
| Mechanical life | cycles | 10000000 |
| Electrical life | cycles | 1100000 |
| Safety related data | | |
| Performance level B10d according to EN/ISO 13489-1 | rated load | cycles 1100000 |
| | mechanical load | cycles 10000000 |
| Mirror contacts according to IEC/EN 609474-4-1 | | yes |
| EMC compatibility | | yes |
| AC coil operating | | |
| Rated AC voltage at 50/60Hz, 60Hz | min | V 110 |
| | max | V 125 |
| AC operating voltage | | |
| of 50/60Hz coil powered at 50Hz | | |
| pick-up | min | %Us 80 |
| | max | %Us 110 |
| drop-out | min | %Us 20 |
| | max | %Us 60 |
| of 50/60Hz coil powered at 60Hz | | |
| pick-up | min | %Us 80 |
| | max | %Us 110 |
| drop-out | min | %Us 20 |
| | max | %Us 60 |
| of 60Hz coil powered at 60Hz | | |
| pick-up | min | %Us 80 |
| | max | %Us 110 |
| drop-out | min | %Us 20 |
| | max | %Us 60 |
| AC average coil consumption at 20°C | | |
| of 50/60Hz coil powered at 50Hz | in-rush | VA 300 |
| | holding | VA 10 |
| of 50/60Hz coil powered at 60Hz | in-rush | VA 300 |
| | holding | VA 10 |
| Dissipation at holding ≤20°C 50Hz | W | 10 |
| DC coil operating | | |
| DC rated control voltage | min | V 110 |
| | max | V 125 |
| DC operating voltage | | |


| | | | |
|--|-----------------------|----------|------|
| pick-up | min | %Us | 80 |
| | max | %Us | 110 |
| drop-out | min | %Us | 20 |
| | max | %Us | 60 |
| Average coil consumption $\leq 20^{\circ}\text{C}$ | | | |
| | in-rush | W | 300 |
| | holding | W | 10 |
| Max cycles frequency | | | |
| Mechanical operation | | cycles/h | 2400 |
| Operating times | | | |
| Average time for Us control | | | |
| in AC | | | |
| Closing NO | min | ms | 60 |
| | max | ms | 100 |
| Opening NO | min | ms | 25 |
| | max | ms | 60 |
| in DC | | | |
| Closing NO | min | ms | 60 |
| | max | ms | 100 |
| Opening NO | min | ms | 25 |
| | max | ms | 60 |
| UL technical data | | | |
| Full-load current (FLA) for three-phase AC motor | | | |
| | at 480V | A | 96 |
| | at 600V | A | 99 |
| Yielded mechanical performance | | | |
| for three-phase AC motor | | | |
| | 200/208V | HP | 30 |
| | 220/230V | HP | 40 |
| | 460/480V | HP | 75 |
| | 575/600V | HP | 100 |
| General USE | | | |
| Contactor | | | |
| | AC current | A | 160 |
| Short-circuit protection fuse, 600V | | | |
| Standard fault | | | |
| | Short circuit current | kA | 5 |
| | Fuse rating | A | 500 |
| | Fuse class | | RK5 |
| Ambient conditions | | | |
| Temperature | | | |
| Operating temperature | | | |
| | min | °C | -50 |
| | max | °C | 70 |
| Storage temperature | | | |
| | min | °C | -60 |
| | max | °C | 80 |
| Max altitude | | | |
| | | m | 3000 |

Resistance & Protection


Pollution degree

3

Dimensions

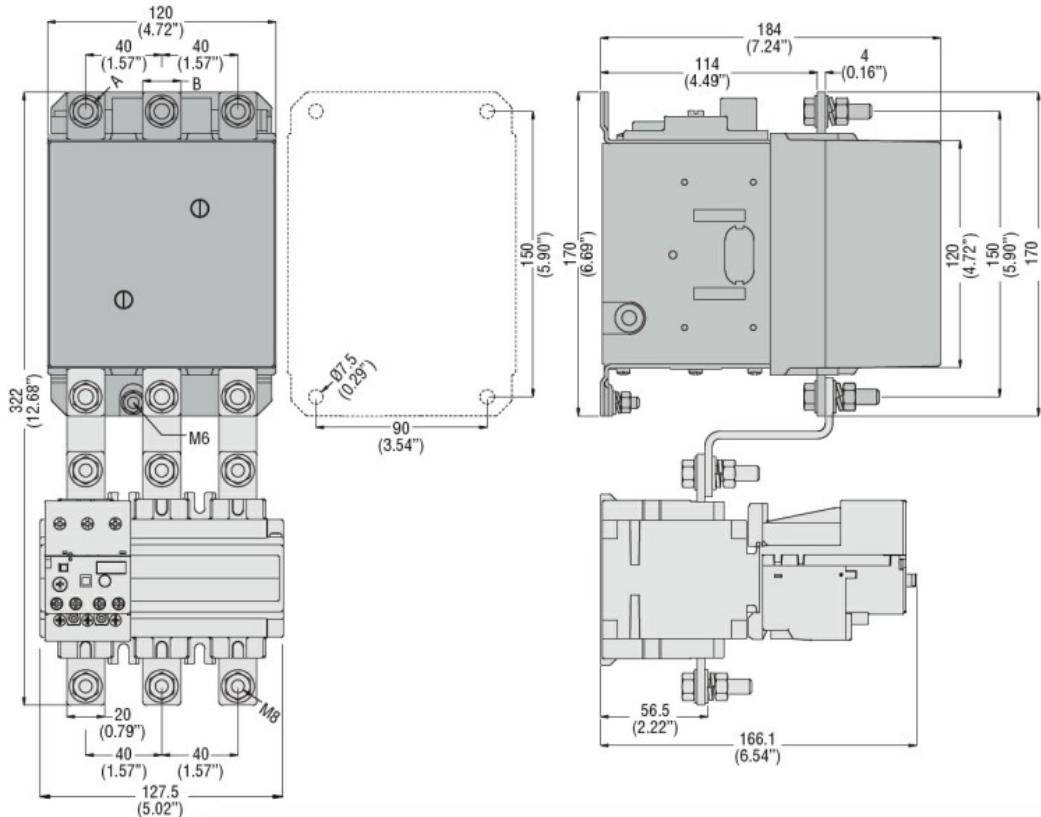

Wiring diagrams

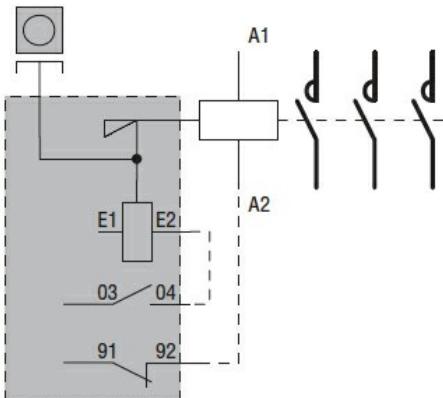

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching