



Product designation	Power contactor		
Product type designation	B145		
<b>Contact characteristics</b>			
Number of poles	Nr.	4	
Rated insulation voltage Ui IEC/EN	V	1000	
Rated impulse withstand voltage Uimp	kV	8	
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current Ith		A	250
Operational current Ie			
	AC-1 ( $\leq 40^{\circ}\text{C}$ )	A	250
	AC-1 ( $\leq 55^{\circ}\text{C}$ )	A	235
	AC-1 ( $\leq 70^{\circ}\text{C}$ )	A	190
	AC-3 ( $\leq 440\text{V} \leq 55^{\circ}\text{C}$ )	A	150
	AC-4 (400V)	A	57
Rated operational power AC-1 ( $T \leq 40^{\circ}\text{C}$ )			
	230V	kW	91
	400V	kW	150
	500V	kW	196
	690V	kW	270
IEC max current Ie in DC1 with $L/R \leq 1\text{ms}$ with 1 poles in series			
	75V	A	220
	110V	A	110
	220V	A	—
	330V	A	—
	460V	A	—
IEC max current Ie in DC1 with $L/R \leq 1\text{ms}$ with 2 poles in series			
	75V	A	220
	110V	A	150
	220V	A	130
	330V	A	—
	460V	A	—
IEC max current Ie in DC1 with $L/R \leq 1\text{ms}$ with 3 poles in series			
	75V	A	220
	110V	A	150
	220V	A	150
	330V	A	130
	460V	A	—
IEC max current Ie in DC1 with $L/R \leq 1\text{ms}$ with 4 poles in series			
	75V	A	220
	110V	A	150
	220V	A	150
	330V	A	150
	460V	A	130

IEC max current  $I_e$  in DC3-DC5 with  $L/R \leq 15\text{ms}$  with 1 poles in series

75V	A	160
110V	A	80
220V	A	—
330V	A	—
460V	A	—

IEC max current  $I_e$  in DC3-DC5 with  $L/R \leq 15\text{ms}$  with 2 poles in series

75V	A	160
110V	A	120
220V	A	90
330V	A	—
460V	A	—

IEC max current  $I_e$  in DC3-DC5 with  $L/R \leq 15\text{ms}$  with 3 poles in series

75V	A	160
110V	A	140
220V	A	120
330V	A	90
460V	A	—

IEC max current  $I_e$  in DC3-DC5 with  $L/R \leq 15\text{ms}$  with 4 poles in series

75V	A	160
110V	A	140
220V	A	140
330V	A	140
460V	A	90

Short-time allowable current for 10s (IEC/EN60947-1) A 1300

Protection fuse

gG (IEC)	A	250
aM (IEC)	A	160

Making capacity (RMS value) A 1500

Breaking capacity at voltage

440V	A	1500
500V	A	1400
690V	A	1200

Resistance per pole (average value) m? 0.3

Power dissipation per pole (average value)

I <sub>th</sub>	W	14.5
AC3	W	6.8

Tightening torque for terminals

min	Nm	18
max	Nm	18
min	lbin	13.3
max	lbin	13.3

Tightening torque for coil terminal

min	Nm	1
max	Nm	1
min	lbin	0.74
max	lbin	0.74

Max number of wires simultaneously connectable Nr. 2

Conductor section

AWG/Kcmil

max 4/0

Power terminal protection according to IEC/EN 60529 IP00


Mechanical features

## Operating position

	normal allowable	Vertical plan ±30°	
Fixing		Screw	
Weight	g	6280	
Conductor section			
AWG/kcmil conductor section	max	4/0	
Operations			
Mechanical life	cycles	10000000	
Electrical life	cycles	1100000	
Safety related data			
Performance level B10d according to EN/ISO 13489-1			
rated load	cycles	1100000	
mechanical load	cycles	10000000	
Mirror contacts according to IEC/EN 609474-4-1		yes	
EMC compatibility		yes	
AC coil operating			
Rated AC voltage at 50/60Hz	V	48	
AC operating voltage			
of 50/60Hz coil powered at 50Hz			
pick-up	min	%Us	80
	max	%Us	110
drop-out	min	%Us	20
	max	%Us	60
of 50/60Hz coil powered at 60Hz			
pick-up	min	%Us	80
	max	%Us	110
drop-out	min	%Us	20
	max	%Us	60
of 60Hz coil powered at 60Hz			
pick-up	min	%Us	80
	max	%Us	110
drop-out	min	%Us	20
	max	%Us	60
AC average coil consumption at 20°C			
of 50/60Hz coil powered at 50Hz	in-rush	VA	300
	holding	VA	10
of 50/60Hz coil powered at 60Hz	in-rush	VA	300
	holding	VA	10
Dissipation at holding ≤20°C 50Hz	W	10	
DC coil operating			
DC rated control voltage	V	48	
DC operating voltage			
pick-up			


	min	%Us	80
	max	%Us	110
drop-out			
	min	%Us	20
	max	%Us	60
Average coil consumption $\leq 20^{\circ}\text{C}$			
	in-rush	W	300
	holding	W	10
<b>Max cycles frequency</b>			
Mechanical operation		cycles/h	2400
<b>Operating times</b>			
Average time for Us control			
in AC			
	Closing NO		
		min	ms 60
		max	ms 100
	Opening NO		
		min	ms 25
		max	ms 60
in DC			
	Closing NO		
		min	ms 60
		max	ms 100
	Opening NO		
		min	ms 25
		max	ms 60
<b>UL technical data</b>			
Full-load current (FLA) for three-phase AC motor			
	at 480V	A	124
	at 600V	A	125
Yielded mechanical performance			
for three-phase AC motor			
	200/208V	HP	50
	220/230V	HP	50
	460/480V	HP	100
General USE			
Contactor			
	AC current	A	250
Short-circuit protection fuse, 600V			
Standard fault			
	Short circuit current	kA	5
	Fuse rating	A	500
	Fuse class		RK5
<b>Ambient conditions</b>			
Temperature			
	Operating temperature		
		min	$^{\circ}\text{C}$ -50
		max	$^{\circ}\text{C}$ 70
	Storage temperature		
		min	$^{\circ}\text{C}$ -60
		max	$^{\circ}\text{C}$ 80
Max altitude		m	3000
<b>Resistance &amp; Protection</b>			
Pollution degree			3

## Dimensions

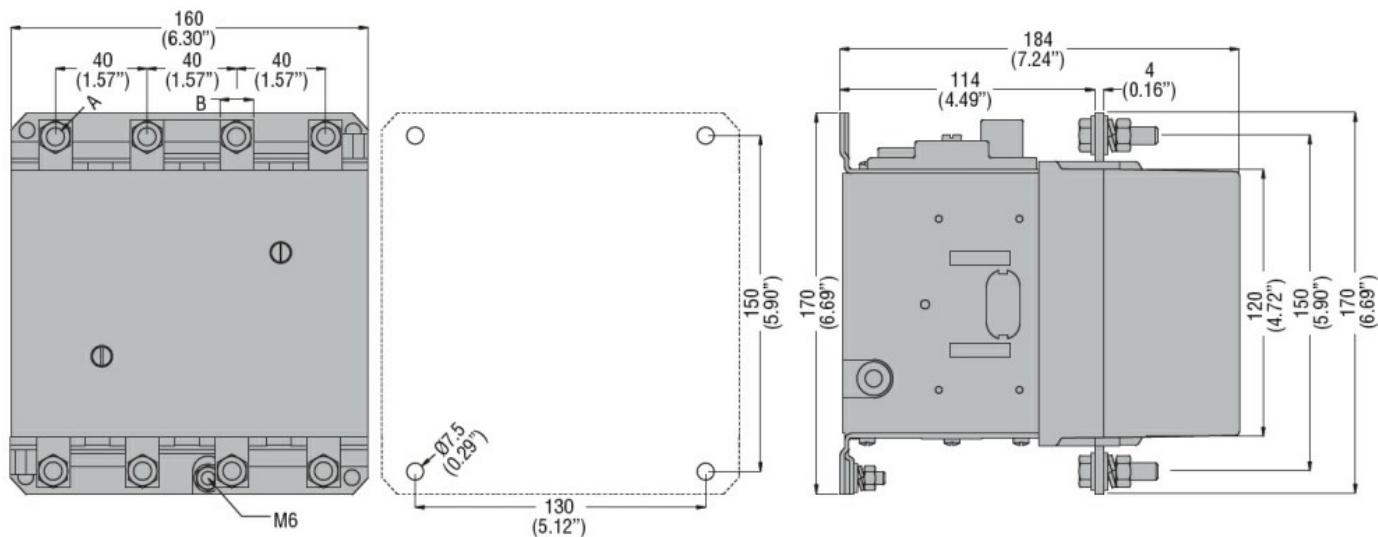

CONTACTOR TYPE	A	B
B115	M6	15 (0.59")
B145	M8	20 (0.79")
B180	M8	20 (0.79")

## Wiring diagrams

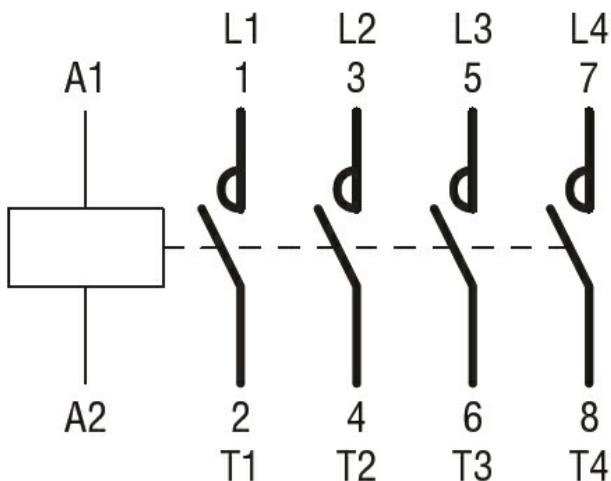

## Certifications and compliance

### Compliance

CSA C22.2 n° 60947-1  
 CSA C22.2 n° 60947-4-1  
 IEC/EN 60947-1  
 IEC/EN 60947-4-1  
 UL 60947-1  
 UL 60947-4-1

### Certificates

CCC  
 cULus  
 EAC

## ETIM classification

### ETIM 8.0

EC000066 -  
 Power contactor,  
 AC switching

