





Product designation	Power contactor		
Product type designation	B1600		
<b>Contact characteristics</b>			
Number of poles	Nr.	3	
Rated insulation voltage $U_i$ IEC/EN	V	690	
Rated impulse withstand voltage $U_{imp}$	kV	8	
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current $I_{th}$	A	1600	
Operational current $I_e$	AC-1 ( $\leq 40^\circ C$ )	A	1600
	AC-1 ( $\leq 55^\circ C$ )	A	1360
	AC-1 ( $\leq 70^\circ C$ )	A	1120
Rated operational power AC-1 ( $T \leq 40^\circ C$ )	230V	kW	550
	400V	kW	950
	500V	kW	1200
	690V	kW	1650
Short-time allowable current for 10s (IEC/EN60947-1)	A	8300	
Protection fuse	gG (IEC)	A	1600
Making capacity (RMS value)	A	6300	
Breaking capacity at voltage	440V	A	6300
	500V	A	5600
	690V	A	5000
Resistance per pole (average value)	m?	7	
Power dissipation per pole (average value)	$I_{th}$	W	180
Tightening torque for terminals	min	Nm	35
	max	Nm	35
	min	lbin	25.8
	max	lbin	25.8
Max number of wires simultaneously connectable	Nr.	2	
Power terminal protection according to IEC/EN 60529		IP00	
<b>Mechanical features</b>			
Operating position	normal allowable		Vertical plan $\pm 30^\circ$
Fixing		Screw	
Weight	g	4915	
<b>Auxiliary contact characteristics</b>			
Thermal current $I_{th}$	A	16	

IEC/EN 60947-5-1 designation	A600 - P600		
Operating current AC15			
	230V	A	3
	400V	A	1.9
	500V	A	1.4
Operating current DC12	110V	A	5.7
Operating current DC13			
	24V	A	5.7
	48V	A	2.9
	60V	A	2.3
	125V	A	0.6
	220V	A	0.2
	600V	A	1.2
Operations			
Mechanical life	cycles	5000000	
Electrical life	cycles	700000	
Safety related data			
Performance level B10d according to EN/ISO 13489-1	rated load	cycles	700000
	mechanical load	cycles	5000000
Mirror contacts according to IEC/EN 609474-4-1	yes		
EMC compatibility	yes		
AC coil operating			
Rated AC voltage at 50/60Hz, 60Hz	min	V	220
	max	V	240
AC operating voltage			
of 50/60Hz coil powered at 50Hz			
pick-up	min	%Us	80
	max	%Us	110
drop-out	min	%Us	20
	max	%Us	60
of 50/60Hz coil powered at 60Hz			
pick-up	min	%Us	80
	max	%Us	110
drop-out	min	%Us	20
	max	%Us	60
of 60Hz coil powered at 60Hz			
pick-up	min	%Us	80
	max	%Us	110
drop-out	min	%Us	20
	max	%Us	60
AC average coil consumption at 20°C			
of 50/60Hz coil powered at 50Hz	in-rush	VA	800
	holding	VA	45
of 50/60Hz coil powered at 60Hz			

		in-rush	VA	800
		holding	VA	45
Dissipation at holding $\leq 20^{\circ}\text{C}$ 50Hz			W	40
<b>DC coil operating</b>				
DC rated control voltage		min	V	220
		max	V	240
<b>DC operating voltage</b>				
pick-up		min	%Us	80
<b>Max cycles frequency</b>				
Mechanical operation			cycles/h	1200
<b>Operating times</b>				
Average time for Us control				
in AC	Closing NO	min	ms	300
		max	ms	450
Opening NO		min	ms	70
		max	ms	130
in DC	Closing NO	min	ms	300
		max	ms	450
Opening NO		min	ms	70
		max	ms	130
<b>UL technical data</b>				
Contact rating of auxiliary contacts according to UL				A600 - P600
<b>Ambient conditions</b>				
Temperature	Operating temperature	min	°C	-50
		max	°C	70
Storage temperature		min	°C	-60
		max	°C	80
<b>Max altitude</b>		m		3000
<b>Resistance &amp; Protection</b>				
Pollution degree				3
<b>Dimensions</b>				

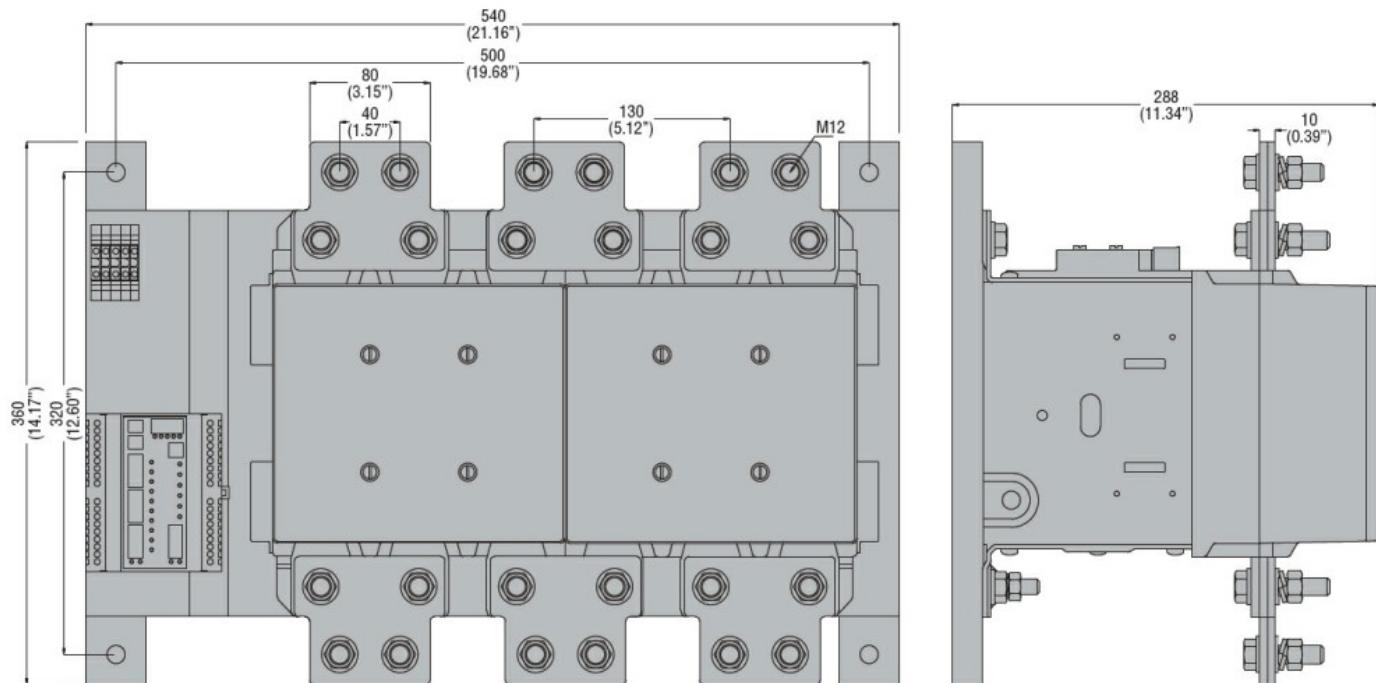

#### Wiring diagrams

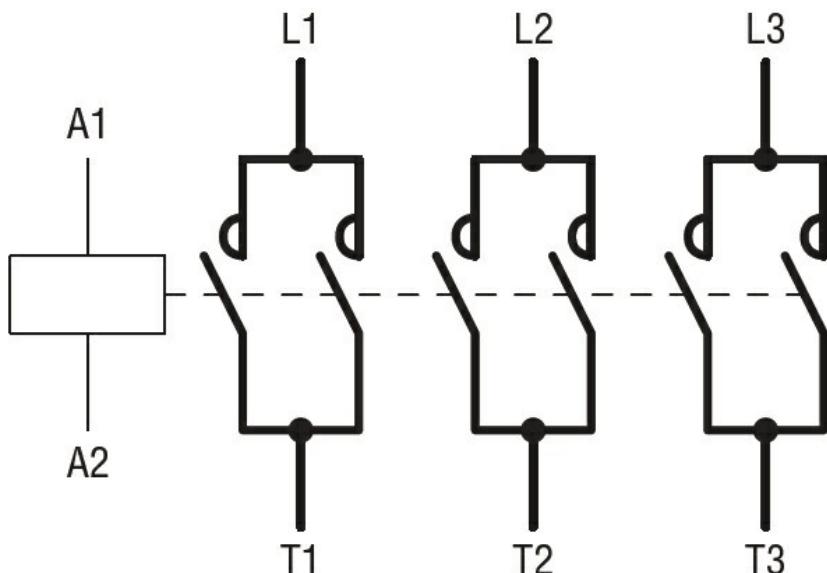

#### Certifications and compliance

##### Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

#### Certificates

/

#### ETIM classification

#### ETIM 8.0

EC000066 -  
Power contactor,  
AC switching