



Product designation	Power contactor		
Product type designation	B180		
<b>Contact characteristics</b>			
Number of poles	Nr.	4	
Rated insulation voltage Ui IEC/EN	V	1000	
Rated impulse withstand voltage Uimp	kV	8	
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current Ith		A	275
Operational current Ie			
	AC-1 ( $\leq 40^{\circ}\text{C}$ )	A	275
	AC-1 ( $\leq 55^{\circ}\text{C}$ )	A	250
	AC-1 ( $\leq 70^{\circ}\text{C}$ )	A	200
	AC-3 ( $\leq 440\text{V} \leq 55^{\circ}\text{C}$ )	A	185
	AC-4 (400V)	A	65
Rated operational power AC-1 ( $T \leq 40^{\circ}\text{C}$ )			
	230V	kW	95
	400V	kW	160
	500V	kW	213
	690V	kW	298
IEC max current Ie in DC1 with $L/R \leq 1\text{ms}$ with 1 poles in series			
	75V	A	260
	110V	A	120
	220V	A	—
	330V	A	—
	460V	A	—
IEC max current Ie in DC1 with $L/R \leq 1\text{ms}$ with 2 poles in series			
	75V	A	260
	110V	A	170
	220V	A	150
	330V	A	—
	460V	A	—
IEC max current Ie in DC1 with $L/R \leq 1\text{ms}$ with 3 poles in series			
	75V	A	260
	110V	A	170
	220V	A	170
	330V	A	150
	460V	A	—
IEC max current Ie in DC1 with $L/R \leq 1\text{ms}$ with 4 poles in series			
	75V	A	260
	110V	A	170
	220V	A	170
	330V	A	170
	460V	A	150

IEC max current  $I_e$  in DC3-DC5 with  $L/R \leq 15\text{ms}$  with 1 poles in series

75V	A	180
110V	A	90
220V	A	—
330V	A	—
460V	A	—

IEC max current  $I_e$  in DC3-DC5 with  $L/R \leq 15\text{ms}$  with 2 poles in series

75V	A	180
110V	A	140
220V	A	100
330V	A	—
460V	A	—

IEC max current  $I_e$  in DC3-DC5 with  $L/R \leq 15\text{ms}$  with 3 poles in series

75V	A	180
110V	A	160
220V	A	140
330V	A	100
460V	A	—

IEC max current  $I_e$  in DC3-DC5 with  $L/R \leq 15\text{ms}$  with 4 poles in series

75V	A	180
110V	A	160
220V	A	160
330V	A	160
460V	A	100

Short-time allowable current for 10s (IEC/EN60947-1) A 1500

Protection fuse

gG (IEC)	A	315
aM (IEC)	A	200

Making capacity (RMS value) A 1850

Breaking capacity at voltage

440V	A	1850
500V	A	1600
690V	A	1480

Resistance per pole (average value) m? 0.3

Power dissipation per pole (average value)

I <sub>th</sub>	W	20.3
AC3	W	9.7

Tightening torque for terminals

min	Nm	18
max	Nm	18
min	lbin	13.3
max	lbin	13.3

Tightening torque for coil terminal

min	Nm	1
max	Nm	1
min	lbin	0.74
max	lbin	0.74

Max number of wires simultaneously connectable Nr. 2

Conductor section

AWG/Kcmil	max	300 kcmil
-----------	-----	-----------

Power terminal protection according to IEC/EN 60529 IP00

Mechanical features

## Operating position

	normal allowable	Vertical plan ±30°
Fixing		Screw
Weight	g	6340

## Conductor section

AWG/kcmil conductor section	max	300 kcmil
-----------------------------	-----	-----------

## Operations

Mechanical life	cycles	10000000
Electrical life	cycles	1000000

## Safety related data

Performance level B10d according to EN/ISO 13489-1

rated load	cycles	1000000
mechanical load	cycles	10000000

Mirror contacts according to IEC/EN 609474-4-1

EMC compatibility	yes
-------------------	-----

## AC coil operating

Rated AC voltage at 50/60Hz, 60Hz

min	V	110
max	V	125

## AC operating voltage

 of 50/60Hz coil powered at 50Hz  
 pick-up

min	%Us	80
max	%Us	110
drop-out		
min	%Us	20
max	%Us	60

 of 50/60Hz coil powered at 60Hz  
 pick-up

min	%Us	80
max	%Us	110
drop-out		
min	%Us	20
max	%Us	60

 of 60Hz coil powered at 60Hz  
 pick-up

min	%Us	80
max	%Us	110
drop-out		
min	%Us	20
max	%Us	60

## AC average coil consumption at 20°C

of 50/60Hz coil powered at 50Hz

in-rush	VA	300
holding	VA	10

of 50/60Hz coil powered at 60Hz

in-rush	VA	300
holding	VA	10

Dissipation at holding ≤20°C 50Hz

W	10
---	----

## DC coil operating

DC rated control voltage

		min	V	110
		max	V	125
<b>DC operating voltage</b>				
pick-up				
drop-out				
Average coil consumption $\leq 20^{\circ}\text{C}$				
in-rush				
holding				
cycles/h				
<b>Max cycles frequency</b>				
<b>Mechanical operation</b>				
<b>Operating times</b>				
Average time for Us control				
in AC				
Closing NO				
Opening NO				
in DC				
Closing NO				
Opening NO				
<b>UL technical data</b>				
Full-load current (FLA) for three-phase AC motor				
at 480V				
at 600V				
A				
180				
A				
144				
<b>Yielded mechanical performance</b>				
for three-phase AC motor				
200/208V				
220/230V				
HP				
60				
460/480V				
575/600V				
HP				
150				
150				
<b>General USE</b>				
Contactor				
AC current				
A				
275				
<b>Short-circuit protection fuse, 600V</b>				
Standard fault				
Short circuit current				
Fuse rating				
Fuse class				
kA				
10				
A				
500				
RK5				
<b>Ambient conditions</b>				
Temperature				
Operating temperature				
min				
°C				
-50				
max				
°C				
70				
<b>Storage temperature</b>				


	min	°C	-60
	max	°C	80
Max altitude	m		3000

Resistance & Protection


Pollution degree

3

Dimensions

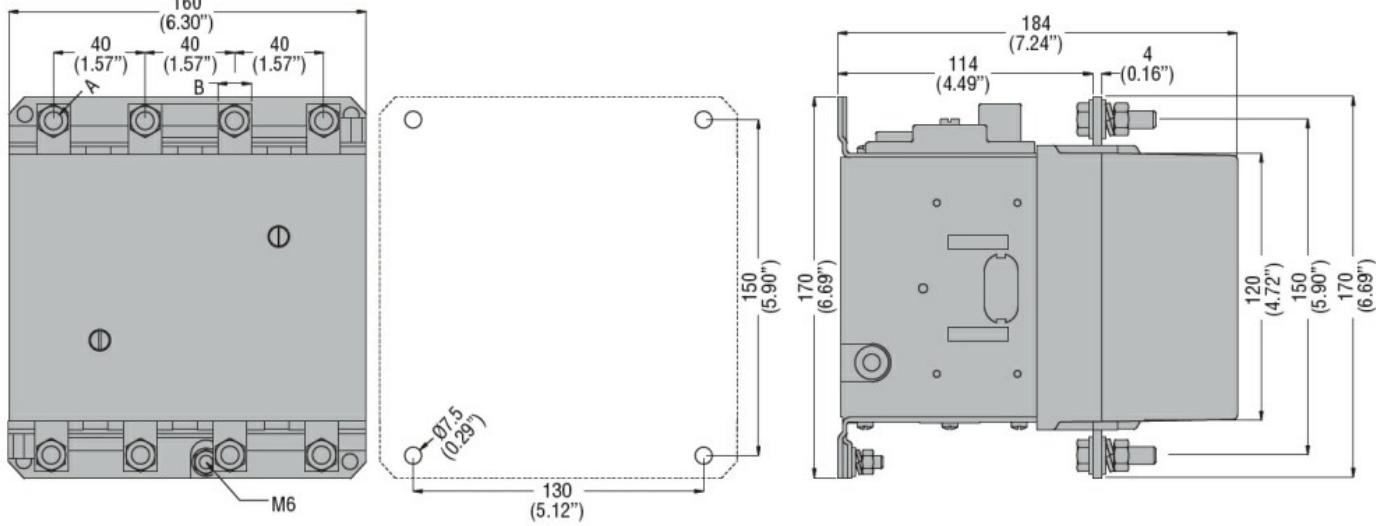

Wiring diagrams

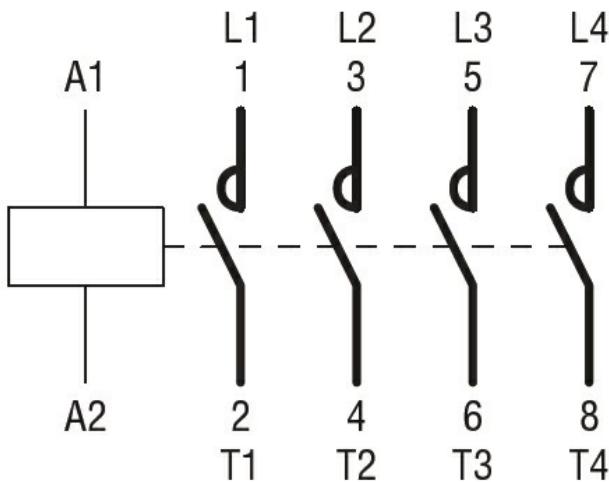

Certifications and compliance

Compliance

[CSA C22.2 n° 60947-1](#)

[CSA C22.2 n° 60947-4-1](#)

[IEC/EN 60947-1](#)

[IEC/EN 60947-4-1](#)

[UL 60947-1](#)

[UL 60947-4-1](#)

Certificates

[CCC](#)

[cULus](#)

---

EAC

ETIM classification

ETIM 8.0

EC000066 -  
Power contactor,  
AC switching