



Product designation Power contactor
Product type designation B180

Contact characteristics

Number of poles	Nr.	4
Rated insulation voltage U_i IEC/EN	V	1000
Rated impulse withstand voltage U_{imp}	kV	8
Operational frequency	min Hz	25
	max Hz	400
IEC Conventional free air thermal current I_{th}	A	275
Operational current I_e		
	AC-1 ($\leq 40^\circ\text{C}$)	A 275
	AC-1 ($\leq 55^\circ\text{C}$)	A 250
	AC-1 ($\leq 70^\circ\text{C}$)	A 200
	AC-3 ($\leq 440\text{V} \leq 55^\circ\text{C}$)	A 185
	AC-4 (400V)	A 65
Rated operational power AC-1 ($T \leq 40^\circ\text{C}$)		
	230V kW	95
	400V kW	160
	500V kW	213
	690V kW	298
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 1 poles in series		
	75V A	260
	110V A	120
	220V A	—
	330V A	—
	460V A	—
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 2 poles in series		
	75V A	260
	110V A	170
	220V A	150
	330V A	—
	460V A	—
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 3 poles in series		
	75V A	260
	110V A	170
	220V A	170
	330V A	150
	460V A	—
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 4 poles in series		
	75V A	260
	110V A	170
	220V A	170
	330V A	170
	460V A	150

IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 1 poles in series

75V	A	180
110V	A	90
220V	A	—
330V	A	—
460V	A	—

IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 2 poles in series

75V	A	180
110V	A	140
220V	A	100
330V	A	—
460V	A	—

IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 3 poles in series

75V	A	180
110V	A	160
220V	A	140
330V	A	100
460V	A	—

IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 4 poles in series

75V	A	180
110V	A	160
220V	A	160
330V	A	160
460V	A	100

Short-time allowable current for 10s (IEC/EN60947-1)

A	1500
---	------

Protection fuse

gG (IEC)	A	315
aM (IEC)	A	200

Making capacity (RMS value)

A	1850
---	------

Breaking capacity at voltage

440V	A	1850
500V	A	1600
690V	A	1480

Resistance per pole (average value)

m?	0.3
----	-----

Power dissipation per pole (average value)

I_{th}	W	20.3
AC3	W	9.7

Tightening torque for terminals

min	Nm	18
max	Nm	18
min	lbin	13.3
max	lbin	13.3

Tightening torque for coil terminal

min	Nm	1
max	Nm	1
min	lbin	0.74
max	lbin	0.74

Max number of wires simultaneously connectable

Nr.	2
-----	---

Conductor section

AWG/Kcmil

max	300 kcmil
-----	-----------

Power terminal protection according to IEC/EN 60529

IP00

Mechanical features

Operating position

	normal allowable	Vertical plan ±30°
Fixing		Screw
Weight	g	6320

Conductor section

AWG/kcmil conductor section

max 300 kcmil

Operations

Mechanical life	cycles	10000000
Electrical life	cycles	1000000

Safety related data

Performance level B10d according to EN/ISO 13489-1

	rated load mechanical load	cycles	1000000
		cycles	10000000

Mirror contacts according to IEC/EN 60947-4-1

yes

EMC compatibility

yes

AC coil operating

Rated AC voltage at 50/60Hz, 60Hz

min	V	440
max	V	415

AC operating voltage

of 50/60Hz coil powered at 50Hz
pick-up

min	%Us	80
max	%Us	110

drop-out

min	%Us	20
max	%Us	60

of 50/60Hz coil powered at 60Hz
pick-up

min	%Us	80
max	%Us	110

drop-out

min	%Us	20
max	%Us	60

of 60Hz coil powered at 60Hz
pick-up

min	%Us	80
max	%Us	110

drop-out

min	%Us	20
max	%Us	60

AC average coil consumption at 20°C

of 50/60Hz coil powered at 50Hz

in-rush	VA	300
holding	VA	10

of 50/60Hz coil powered at 60Hz

in-rush	VA	300
holding	VA	10

Dissipation at holding ≤20°C 50Hz

W	10
---	----

DC coil operating

DC rated control voltage

		min	V	440			
		max	V	415			
DC operating voltage							
pick-up		min	%Us	80			
		max	%Us	110			
	drop-out	min	%Us	20			
		max	%Us	60			
Average coil consumption ≤20°C							
		in-rush	W	300			
		holding	W	10			
Max cycles frequency							
Mechanical operation			cycles/h	2400			
Operating times							
Average time for Us control							
in AC	Closing NO	min	ms	60			
		max	ms	100			
		Opening NO	min	ms	25		
			max	ms	60		
			in DC	Closing NO	min	ms	60
					max	ms	100
	Opening NO	min			ms	25	
		max		ms	60		
		UL technical data					
	Full-load current (FLA) for three-phase AC motor						
			at 480V	A	180		
			at 600V	A	144		
Yielded mechanical performance							
for three-phase AC motor							
		200/208V	HP	60			
		220/230V	HP	75			
		460/480V	HP	150			
		575/600V	HP	150			
General USE							
Contactor							
	AC current		A	275			
Short-circuit protection fuse, 600V							
Standard fault							
	Short circuit current		kA	10			
	Fuse rating		A	500			
	Fuse class			RK5			
Ambient conditions							
Temperature							
Operating temperature							
	min		°C	-50			
	max		°C	70			
	Storage temperature						


min	°C	-60
max	°C	80
Max altitude	m	3000

Resistance & Protection

Pollution degree


3

Dimensions

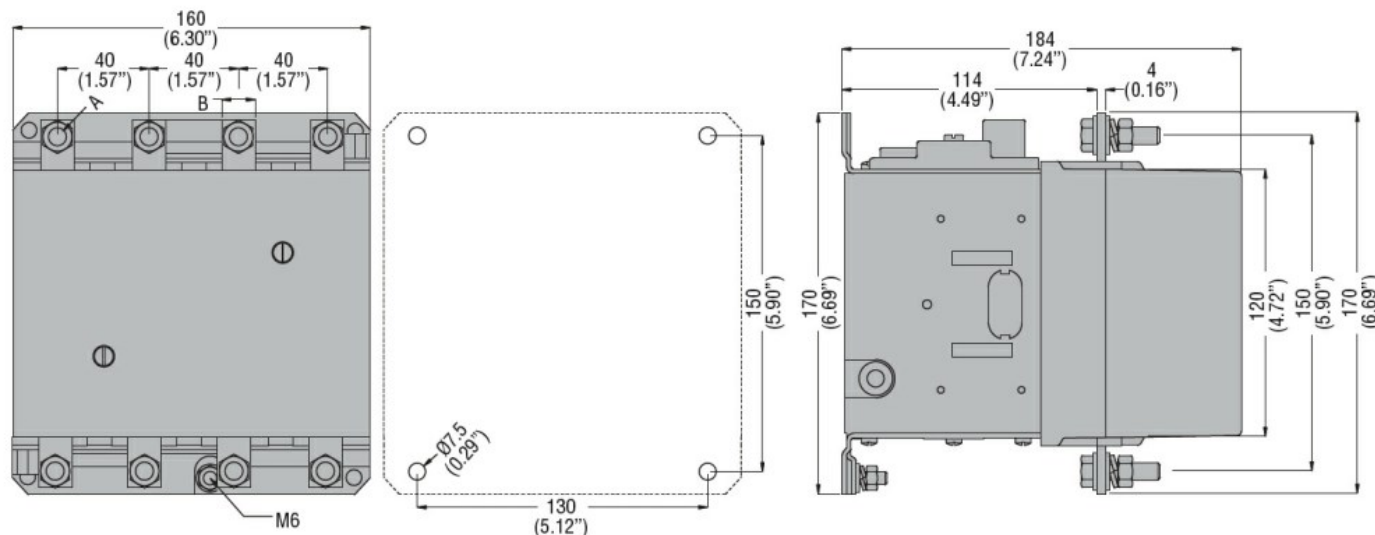

CONTACTOR TYPE	A	B
B115	M6	15 (0.59")
B145	M8	20 (0.79")
B180	M8	20 (0.79")

Wiring diagrams

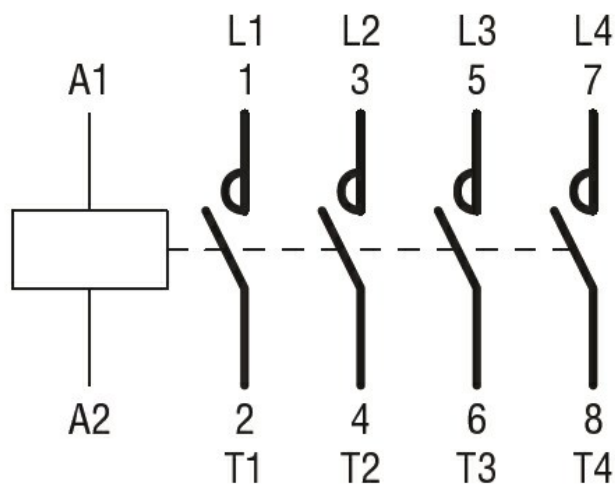

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching