





Contact characteristics

Number of poles	Nr.	3
Operational current Ie		
	AC-4 (400V)	A 115
Rated operational power AC-3 (T≤55°C)	400V	kW 140

Dimensions

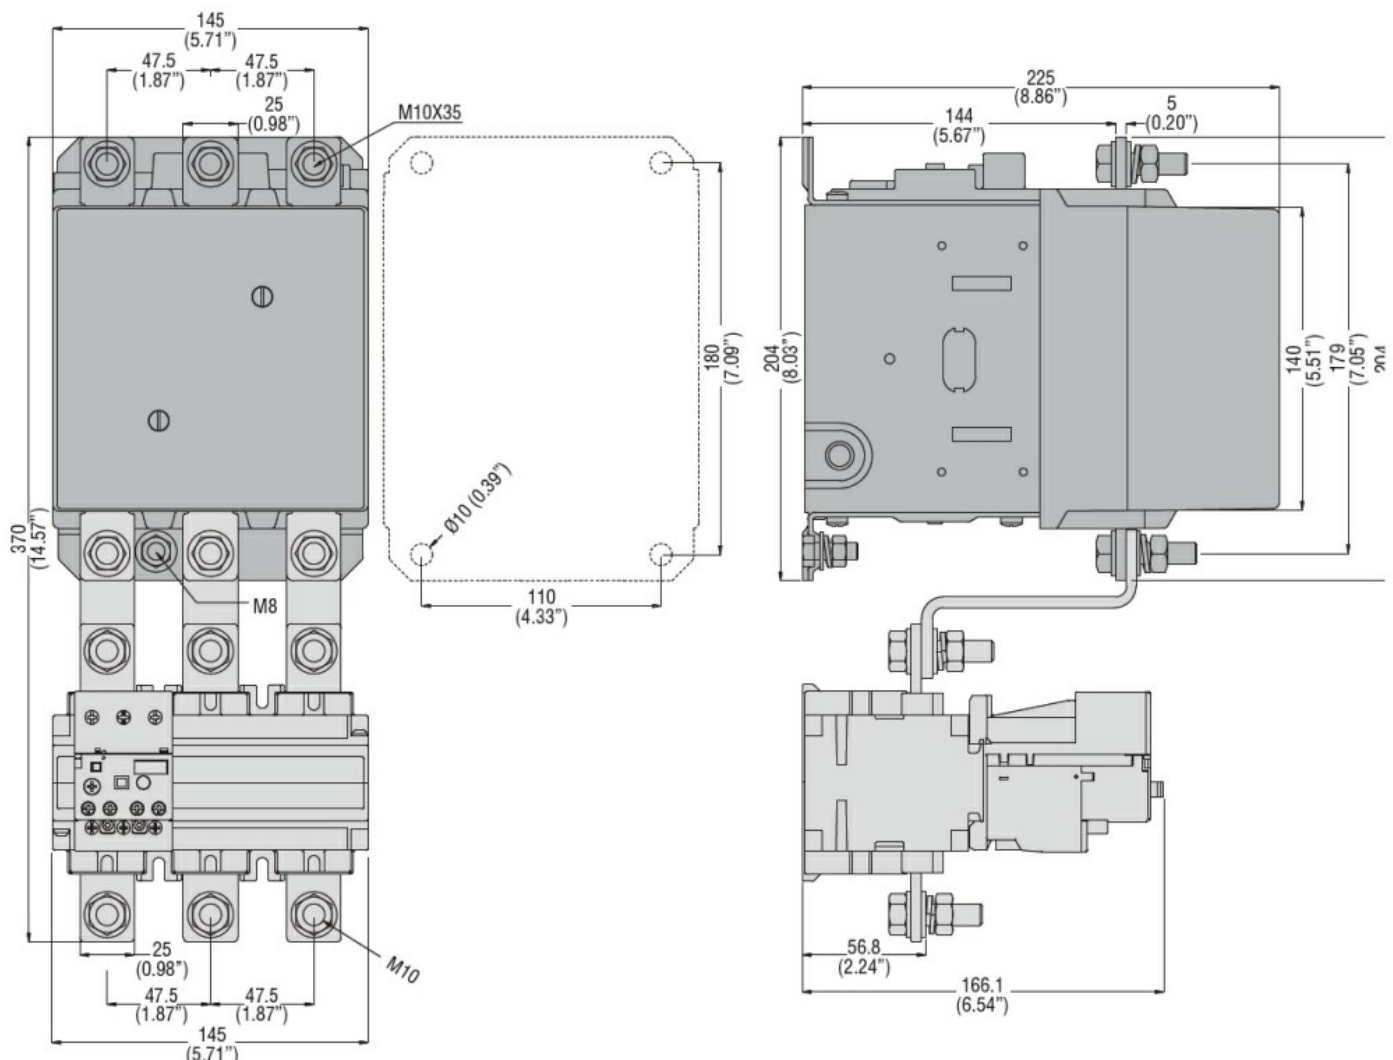

Wiring diagrams

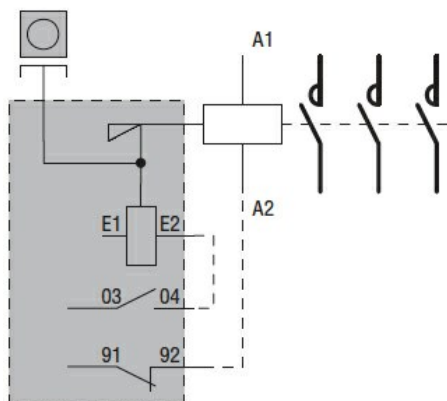

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

cULus

EAC