



Product designation	Power contactor		
Product type designation	B400		
<b>Contact characteristics</b>			
Number of poles	Nr.	3	
Rated insulation voltage $U_i$ IEC/EN	V	1000	
Rated impulse withstand voltage $U_{imp}$	kV	8	
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current $I_{th}$		A	550
Operational current $I_e$			
	AC-1 ( $\leq 40^\circ C$ )	A	550
	AC-1 ( $\leq 55^\circ C$ )	A	430
	AC-1 ( $\leq 70^\circ C$ )	A	360
	AC-3 ( $\leq 440V \leq 55^\circ C$ )	A	420
	AC-4 (400V)	A	200
Rated operational power AC-3 ( $T \leq 55^\circ C$ )			
	230V	kW	130
	400V	kW	225
	415V	kW	247
	440V	kW	263
	500V	kW	271
	690V	kW	352
	1000V	kW	208
Rated operational power AC-1 ( $T \leq 40^\circ C$ )			
	230V	kW	200
	400V	kW	345
	500V	kW	452
	690V	kW	598
IEC max current $I_e$ in DC1 with $L/R \leq 1ms$ with 1 poles in series			
	75V	A	400
	110V	A	250
	220V	A	--
	330V	A	--
	460V	A	--
IEC max current $I_e$ in DC1 with $L/R \leq 1ms$ with 2 poles in series			
	75V	A	400
	110V	A	400
	220V	A	350
	330V	A	--
	460V	A	--
IEC max current $I_e$ in DC1 with $L/R \leq 1ms$ with 3 poles in series			
	75V	A	400
	110V	A	400
	220V	A	400

	330V	A	350
	460V	A	--
IEC max current $I_e$ in DC1 with $L/R \leq 1\text{ms}$ with 4 poles in series			
	75V	A	400
	110V	A	400
	220V	A	400
	330V	A	400
	460V	A	350
IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 1 poles in series			
	75V	A	350
	110V	A	200
	220V	A	--
	330V	A	--
	460V	A	--
IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 2 poles in series			
	75V	A	350
	110V	A	350
	220V	A	280
	330V	A	--
	460V	A	--
IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 3 poles in series			
	75V	A	350
	110V	A	350
	220V	A	350
	330V	A	280
	460V	A	--
IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 4 poles in series			
	75V	A	350
	110V	A	350
	220V	A	350
	330V	A	280
	460V	A	280
Short-time allowable current for 10s (IEC/EN60947-1)			A 3600
Protection fuse			
	gG (IEC)	A	630
	aM (IEC)	A	400
Making capacity (RMS value)			A 4200
Breaking capacity at voltage			
	440V	A	4000
	500V	A	3400
	690V	A	3360
Resistance per pole (average value)			m? 0.2
Power dissipation per pole (average value)			
	I <sub>th</sub>	W	52
	AC3	W	32
Tightening torque for terminals			
	min	Nm	35
	max	Nm	35
	min	lbin	25.8
	max	lbin	25.8
Tightening torque for coil terminal			
	min	Nm	1
	max	Nm	1

	min	Ibin	0.74		
	max	Ibin	0.74		
Max number of wires simultaneously connectable	Nr. 2				
Conductor section	AWG/Kcmil				
	max	2x 300 kcmil			
Power terminal protection according to IEC/EN 60529	IP00				
<b>Mechanical features</b>					
Operating position	normal allowable	Vertical plan ±30°			
Fixing	Screw				
Weight	g	9490			
Conductor section	AWG/kcmil conductor section				
	max	2x 300 kcmil			
<b>Operations</b>					
Mechanical life	cycles	10000000			
Electrical life	cycles	700000			
<b>Safety related data</b>					
Performance level B10d according to EN/ISO 13489-1	rated load mechanical load	cycles	700000 10000000		
Mirror contacts according to IEC/EN 609474-4-1	yes				
EMC compatibility	yes				
<b>AC coil operating</b>					
Rated AC voltage at 50/60Hz	V	60			
AC operating voltage					
of 50/60Hz coil powered at 50Hz					
pick-up	min max	%Us %Us	80 110		
drop-out	min max	%Us %Us	20 60		
of 50/60Hz coil powered at 60Hz					
pick-up	min max	%Us %Us	80 110		
drop-out	min max	%Us %Us	20 60		
of 60Hz coil powered at 60Hz					
pick-up	min max	%Us %Us	80 110		
drop-out	min max	%Us %Us	20 60		
AC average coil consumption at 20°C					
of 50/60Hz coil powered at 50Hz	in-rush holding	VA VA	300 10		

of 50/60Hz coil powered at 60Hz	in-rush	VA	300
	holding	VA	10
Dissipation at holding $\leq 20^{\circ}\text{C}$ 50Hz		W	10
<b>DC coil operating</b>			
DC rated control voltage		V	60
DC operating voltage			
pick-up	min	%Us	80
	max	%Us	110
drop-out	min	%Us	20
	max	%Us	60
Average coil consumption $\leq 20^{\circ}\text{C}$	in-rush	W	300
	holding	W	10
<b>Max cycles frequency</b>			
Mechanical operation		cycles/h	2400
<b>Operating times</b>			
Average time for Us control			
in AC			
Closing NO	min	ms	80
	max	ms	120
Opening NO	min	ms	30
	max	ms	75
in DC			
Closing NO	min	ms	80
	max	ms	120
Opening NO	min	ms	30
	max	ms	75
<b>UL technical data</b>			
Full-load current (FLA) for three-phase AC motor	at 480V	A	414
	at 600V	A	382
Yielded mechanical performance			
for three-phase AC motor	200/208V	HP	125
	220/230V	HP	150
	460/480V	HP	350
	575/600V	HP	400
General USE			
Contactor	AC current	A	550
Short-circuit protection fuse, 600V			
Standard fault	Short circuit current	kA	18
	Fuse rating	A	800
	Fuse class	L	
<b>Ambient conditions</b>			
Temperature			

Operating temperature

min	°C	-50
max	°C	70

Storage temperature

min	°C	-60
max	°C	80

Max altitude


m 3000

Resistance & Protection


Pollution degree

3

Dimensions

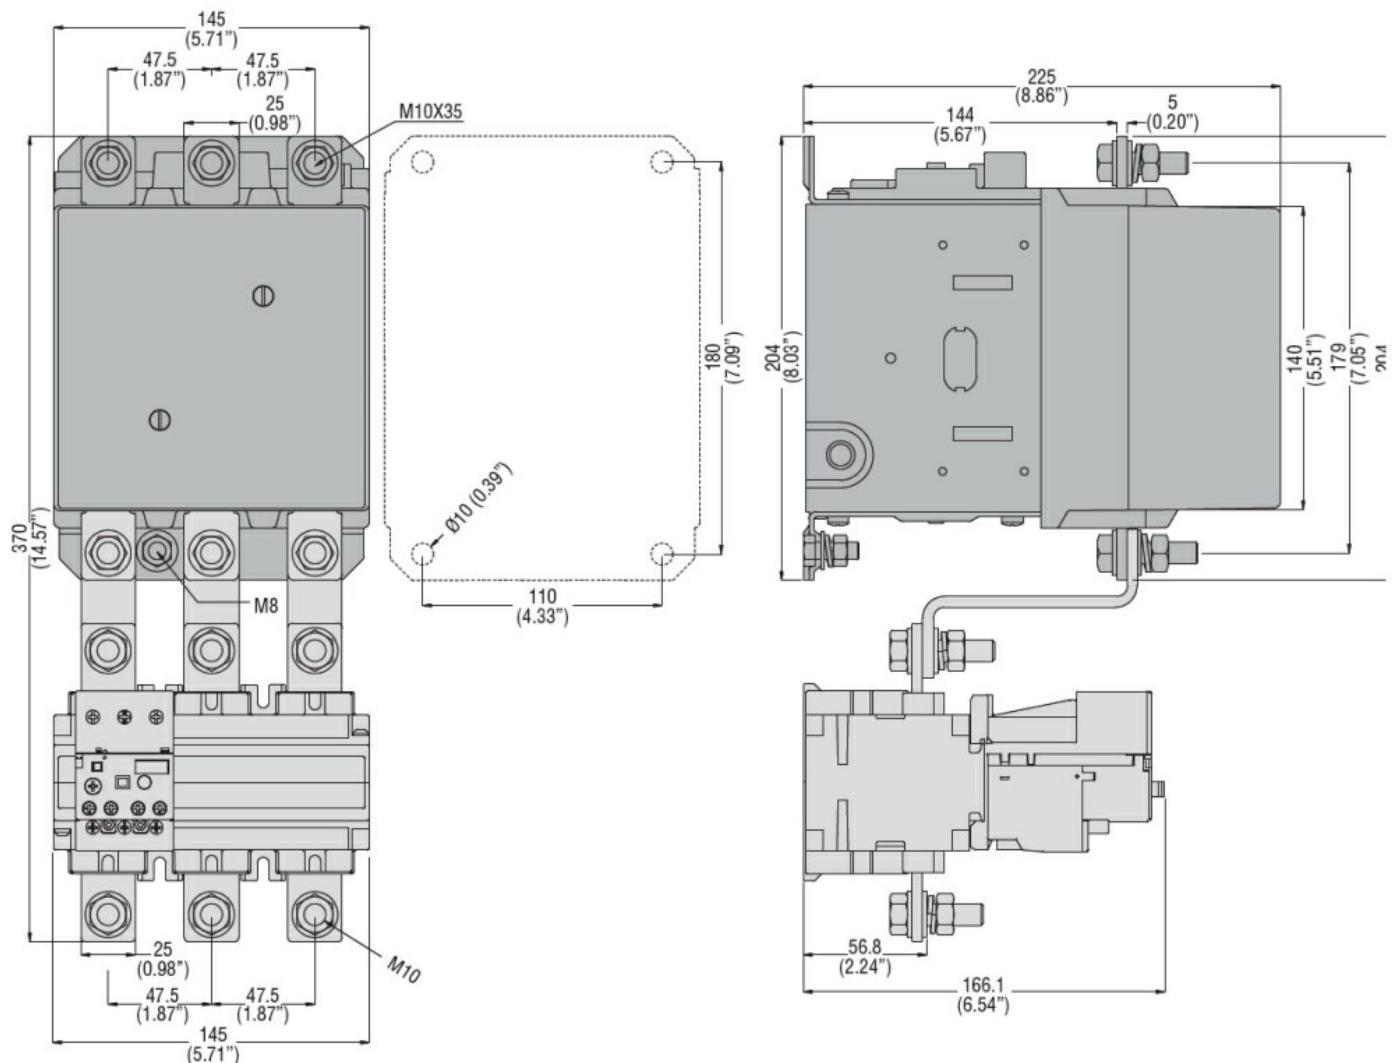

Wiring diagrams

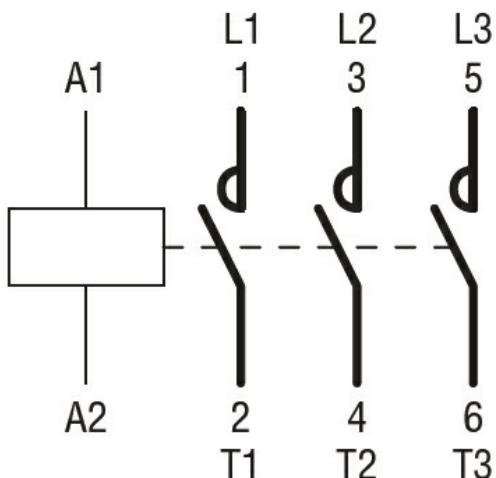

### Certifications and compliance

#### Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

#### Certificates

CCC

cULus

EAC

### ETIM classification

ETIM 8.0

EC000066 -  
Power contactor,  
AC switching