




Contact characteristics


Number of poles	Nr.	3
Operational current I_e		
Rated operational power AC-3 ($T \leq 55^\circ C$)	AC-4 (400V) A	200

400V kW 225

Dimensions

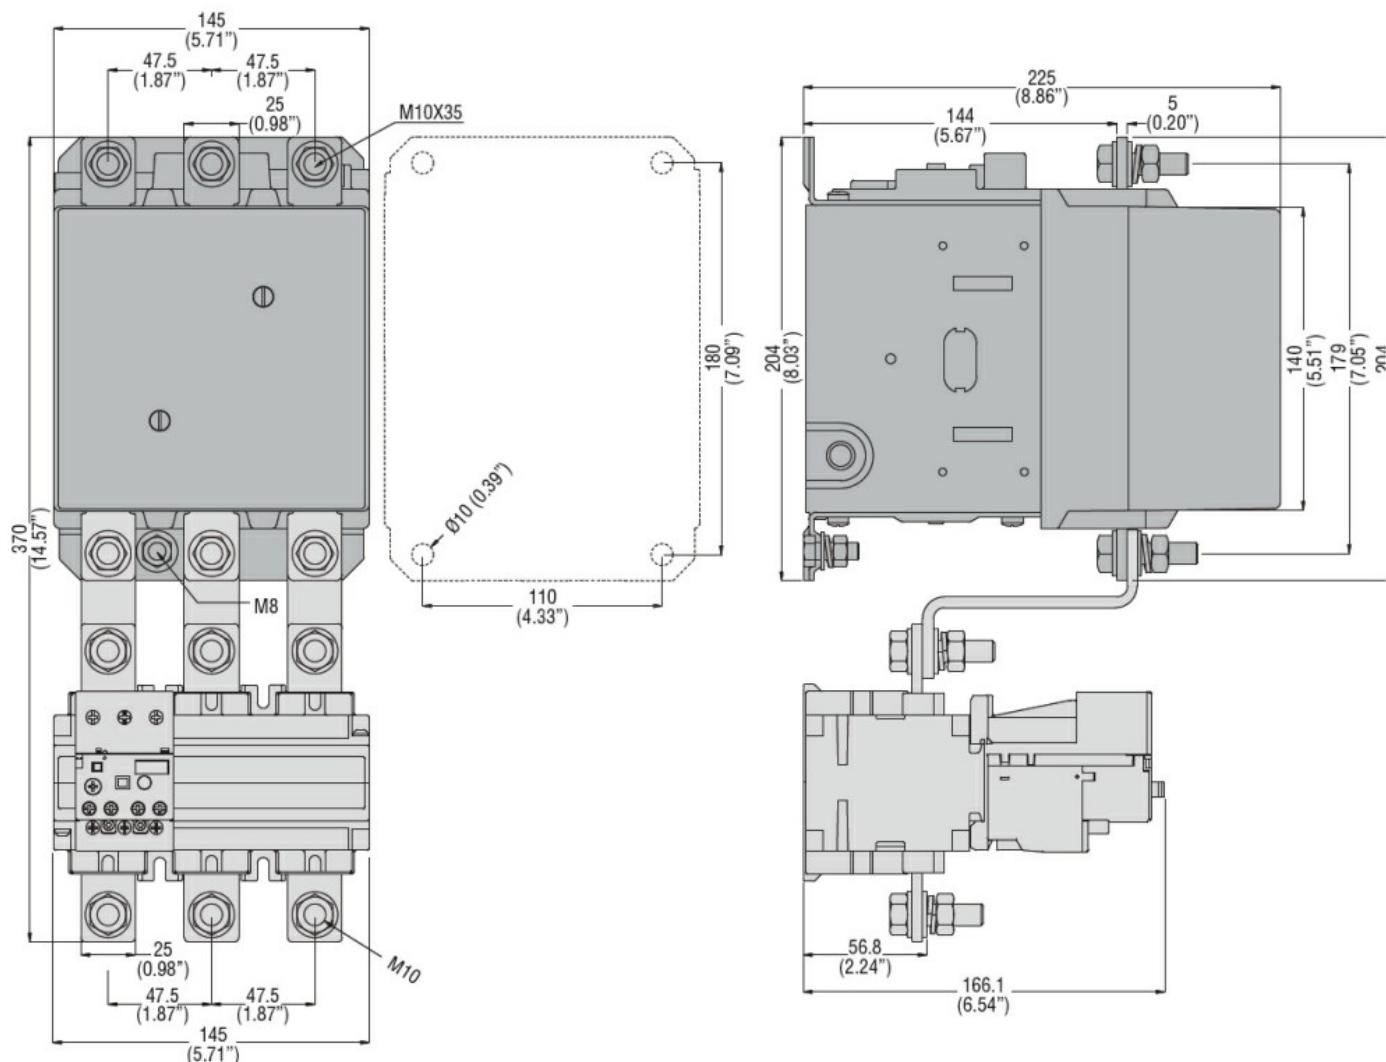

Wiring diagrams

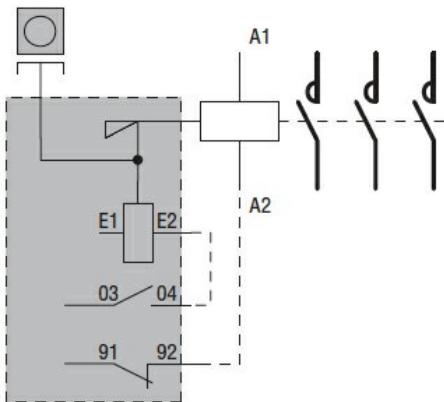

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

ccc

cULus

EAC