



Product designation	Power contactor		
Product type designation	B500		
Contact characteristics			
Number of poles	Nr. 3		
Rated insulation voltage U_i IEC/EN	V 1000		
Rated impulse withstand voltage U_{imp}	kV 8		
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current I_{th}	A 700		
Operational current I_e			
	AC-1 ($\leq 40^\circ C$)	A	700
	AC-1 ($\leq 55^\circ C$)	A	550
	AC-1 ($\leq 70^\circ C$)	A	500
	AC-3 ($\leq 440V \leq 55^\circ C$)	A	520
	AC-4 (400V)	A	240
Rated operational power AC-3 ($T \leq 55^\circ C$)	230V	kW	156
	400V	kW	290
	415V	kW	306
	440V	kW	328
	500V	kW	367
	690V	kW	416
	1000V	kW	312
Rated operational power AC-1 ($T \leq 40^\circ C$)	230V	kW	252
	400V	kW	438
	500V	kW	575
	690V	kW	755
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 1 poles in series	75V	A	650
	110V	A	320
	220V	A	--
	330V	A	--
	460V	A	--
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 2 poles in series	75V	A	650
	110V	A	550
	220V	A	450
	330V	A	--
	460V	A	--
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 3 poles in series	75V	A	650
	110V	A	600
	220V	A	600


	330V	A	450
	460V	A	--
IEC max current le in DC1 with L/R ≤ 1ms with 4 poles in series			
	75V	A	650
	110V	A	600
	220V	A	600
	330V	A	600
	460V	A	450
IEC max current le in DC3-DC5 with L/R ≤ 15ms with 1 poles in series			
	75V	A	550
	110V	A	320
	220V	A	--
	330V	A	--
	460V	A	--
IEC max current le in DC3-DC5 with L/R ≤ 15ms with 2 poles in series			
	75V	A	550
	110V	A	550
	220V	A	450
	330V	A	--
	460V	A	--
IEC max current le in DC3-DC5 with L/R ≤ 15ms with 3 poles in series			
	75V	A	550
	110V	A	550
	220V	A	550
	330V	A	450
	460V	A	--
IEC max current le in DC3-DC5 with L/R ≤ 15ms with 4 poles in series			
	75V	A	550
	110V	A	550
	220V	A	550
	330V	A	450
	460V	A	450
Short-time allowable current for 10s (IEC/EN60947-1)			A 4050
Protection fuse			
	gG (IEC)	A	800
	aM (IEC)	A	500
Making capacity (RMS value)			A 6300
Breaking capacity at voltage			
	440V	A	6300
	500V	A	5600
	690V	A	5000
Resistance per pole (average value)			m? 0.14
Power dissipation per pole (average value)			
	I _{th}	W	68.6
	AC3	W	35
Tightening torque for terminals			
	min	Nm	35
	max	Nm	35
	min	lbin	25.8
	max	lbin	25.8
Tightening torque for coil terminal			
	min	Nm	1
	max	Nm	1

	min	Ibin	0.74		
	max	Ibin	0.74		
Max number of wires simultaneously connectable	Nr. 2				
Conductor section					
AWG/Kcmil	max	2x 500 kcmil			
Power terminal protection according to IEC/EN 60529	IP00				
Mechanical features					
Operating position	normal allowable	Vertical plan ±30°			
Fixing	Screw				
Weight	g	1806			
Conductor section					
AWG/kcmil conductor section	max	2x 500 kcmil			
Operations					
Mechanical life	cycles	5000000			
Electrical life	cycles	700000			
Safety related data					
Performance level B10d according to EN/ISO 13489-1	rated load mechanical load	cycles	700000 5000000		
Mirror contacts according to IEC/EN 609474-4-1	yes				
EMC compatibility	yes				
AC coil operating					
Rated AC voltage at 50/60Hz, 60Hz	min max	V V	110 125		
AC operating voltage					
of 50/60Hz coil powered at 50Hz					
pick-up	min max	%Us %Us	80 110		
drop-out	min max	%Us %Us	20 60		
of 50/60Hz coil powered at 60Hz					
pick-up	min max	%Us %Us	80 110		
drop-out	min max	%Us %Us	20 60		
of 60Hz coil powered at 60Hz					
pick-up	min max	%Us %Us	80 110		
drop-out	min max	%Us %Us	20 60		
AC average coil consumption at 20°C					
of 50/60Hz coil powered at 50Hz					

	in-rush	VA	400
	holding	VA	18
of 50/60Hz coil powered at 60Hz			
	in-rush	VA	400
	holding	VA	18
Dissipation at holding $\leq 20^{\circ}\text{C}$ 50Hz		W	18
DC coil operating			
DC rated control voltage			
	min	V	110
	max	V	125
DC operating voltage			
pick-up			
	min	%Us	80
	max	%Us	110
drop-out			
	min	%Us	20
	max	%Us	60
Average coil consumption $\leq 20^{\circ}\text{C}$			
	in-rush	W	400
	holding	W	18
Max cycles frequency			
Mechanical operation		cycles/h	1200
Operating times			
Average time for Us control			
in AC			
Closing NO			
	min	ms	110
	max	ms	180
Opening NO			
	min	ms	60
	max	ms	100
in DC			
Closing NO			
	min	ms	110
	max	ms	180
Opening NO			
	min	ms	60
	max	ms	100
UL technical data			
General USE			
Contactor			
	AC current	A	700
Short-circuit protection fuse, 600V			
Standard fault			
	Short circuit current	kA	18
	Fuse rating	A	1200
	Fuse class	L	
Ambient conditions			
Temperature			
Operating temperature			
	min	$^{\circ}\text{C}$	-50
	max	$^{\circ}\text{C}$	70
Storage temperature			
	min	$^{\circ}\text{C}$	-60


	max	°C	80
Max altitude	m		3000
Resistance & Protection			
Pollution degree			3

Dimensions

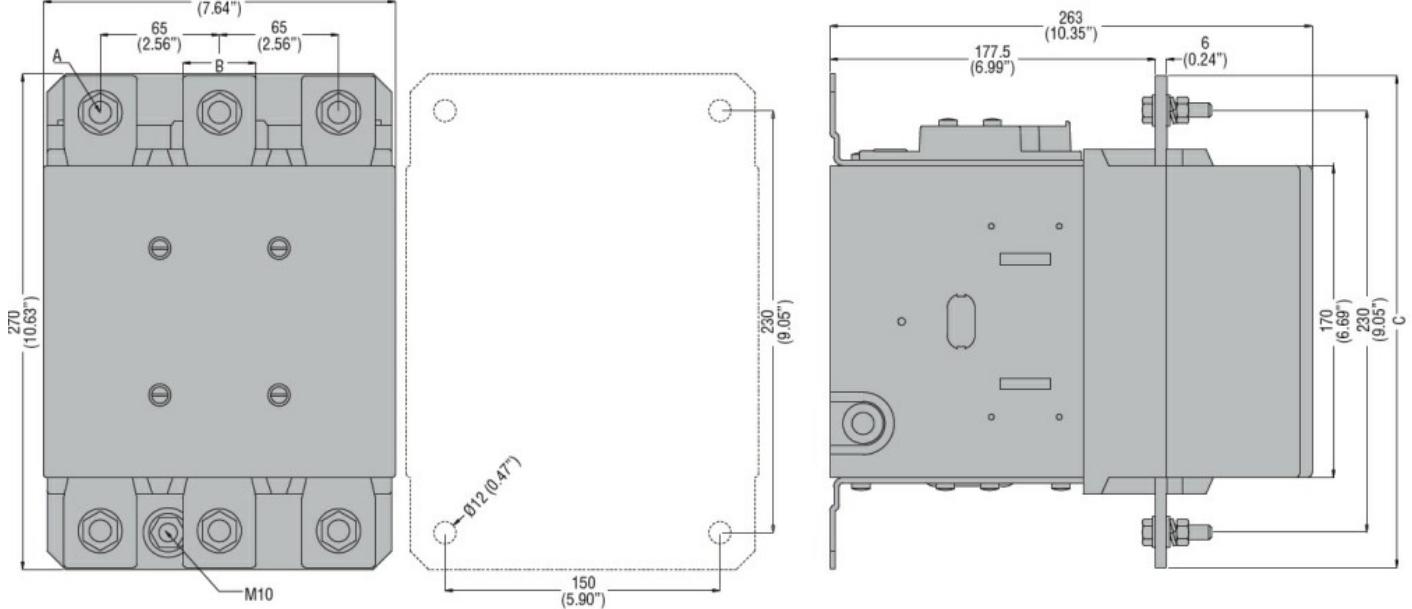

CONTACTOR TYPE	A	B	C
B500	M10	35 (1.38")	265 (10.43")
B630	M12	40 (1.57")	270 (10.63")

Wiring diagrams

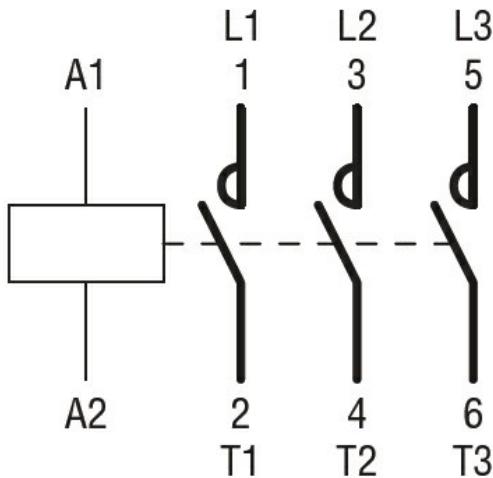

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

cULus
EAC

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching