



Product designation	Power contactor		
Product type designation	B630		
<b>Contact characteristics</b>			
Number of poles	Nr. 3		
Rated insulation voltage $U_i$ IEC/EN	V 1000		
Rated impulse withstand voltage $U_{imp}$	kV 8		
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current $I_{th}$	A 800		
Operational current $I_e$			
	AC-1 ( $\leq 40^\circ C$ )	A	800
	AC-1 ( $\leq 55^\circ C$ )	A	640
	AC-1 ( $\leq 70^\circ C$ )	A	540
	AC-3 ( $\leq 440V \leq 55^\circ C$ )	A	630
	AC-4 (400V)	A	260
Rated operational power AC-3 ( $T \leq 55^\circ C$ )	230V	kW	198
	400V	kW	355
	415V	kW	368
	440V	kW	368
	500V	kW	368
	690V	kW	440
	1000V	kW	368
Rated operational power AC-1 ( $T \leq 40^\circ C$ )	230V	kW	288
	400V	kW	500
	500V	kW	655
	690V	kW	860
IEC max current $I_e$ in DC1 with $L/R \leq 1ms$ with 1 poles in series	75V	A	800
	110V	A	460
	220V	A	--
	330V	A	--
	460V	A	--
IEC max current $I_e$ in DC1 with $L/R \leq 1ms$ with 2 poles in series	75V	A	800
	110V	A	800
	220V	A	700
	330V	A	--
	460V	A	--
IEC max current $I_e$ in DC1 with $L/R \leq 1ms$ with 3 poles in series	75V	A	800
	110V	A	800
	220V	A	800


	330V	A	700
	460V	A	--
IEC max current $I_e$ in DC1 with $L/R \leq 1\text{ms}$ with 4 poles in series			
	75V	A	800
	110V	A	800
	220V	A	800
	330V	A	750
	460V	A	700
IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 1 poles in series			
	75V	A	800
	110V	A	460
	220V	A	--
	330V	A	--
	460V	A	--
IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 2 poles in series			
	75V	A	800
	110V	A	800
	220V	A	700
	330V	A	--
	460V	A	--
IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 3 poles in series			
	75V	A	800
	110V	A	800
	220V	A	800
	330V	A	650
	460V	A	--
IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 4 poles in series			
	75V	A	800
	110V	A	800
	220V	A	800
	330V	A	650
	460V	A	700
Short-time allowable current for 10s (IEC/EN60947-1)			A 5040
Protection fuse			
	gG (IEC)	A	1000
	aM (IEC)	A	630
Making capacity (RMS value)			A 6300
Breaking capacity at voltage			
	440V	A	6300
	500V	A	5600
	690V	A	5000
Resistance per pole (average value)			m? 0.14
Power dissipation per pole (average value)			
	I <sub>th</sub>	W	90
	AC3	W	56
Tightening torque for terminals			
	min	Nm	55
	max	Nm	55
	min	lbin	40.6
	max	lbin	40.6
Tightening torque for coil terminal			
	min	Nm	1
	max	Nm	1

	min	Ibin	0.74		
	max	Ibin	0.74		
Max number of wires simultaneously connectable	Nr. 2				
Conductor section					
AWG/Kcmil	max	2x 600 kcmil			
Power terminal protection according to IEC/EN 60529	IP00				
<b>Mechanical features</b>					
Operating position	normal allowable	Vertical plan ±30°			
Fixing	Screw				
Weight	g	1888			
Conductor section					
AWG/kcmil conductor section	max	2x 600 kcmil			
<b>Operations</b>					
Mechanical life	cycles	5000000			
Electrical life	cycles	700000			
<b>Safety related data</b>					
Performance level B10d according to EN/ISO 13489-1	rated load mechanical load	cycles	700000 5000000		
Mirror contacts according to IEC/EN 609474-4-1	yes				
EMC compatibility	yes				
<b>AC coil operating</b>					
Rated AC voltage at 50/60Hz, 60Hz	min max	V V	380 415		
AC operating voltage					
of 50/60Hz coil powered at 50Hz					
pick-up	min max	%Us %Us	80 110		
drop-out	min max	%Us %Us	20 60		
of 50/60Hz coil powered at 60Hz					
pick-up	min max	%Us %Us	80 110		
drop-out	min max	%Us %Us	20 60		
of 60Hz coil powered at 60Hz					
pick-up	min max	%Us %Us	80 110		
drop-out	min max	%Us %Us	20 60		
AC average coil consumption at 20°C					
of 50/60Hz coil powered at 50Hz					

	in-rush	VA	400
	holding	VA	18
of 50/60Hz coil powered at 60Hz			
	in-rush	VA	400
	holding	VA	18
Dissipation at holding $\leq 20^{\circ}\text{C}$ 50Hz		W	18
<b>DC coil operating</b>			
DC rated control voltage			
	min	V	380
	max	V	415
<b>DC operating voltage</b>			
pick-up			
	min	%Us	80
	max	%Us	110
drop-out			
	min	%Us	20
	max	%Us	60
Average coil consumption $\leq 20^{\circ}\text{C}$			
	in-rush	W	400
	holding	W	18
<b>Max cycles frequency</b>			
Mechanical operation		cycles/h	1200
<b>Operating times</b>			
Average time for Us control			
in AC			
Closing NO			
	min	ms	110
	max	ms	180
Opening NO			
	min	ms	60
	max	ms	100
in DC			
Closing NO			
	min	ms	110
	max	ms	180
Opening NO			
	min	ms	60
	max	ms	100
<b>UL technical data</b>			
General USE			
Contactor			
	AC current	A	800
Short-circuit protection fuse, 600V			
Standard fault			
	Short circuit current	kA	18
	Fuse rating	A	1500
	Fuse class	L	
<b>Ambient conditions</b>			
Temperature			
Operating temperature			
	min	$^{\circ}\text{C}$	-50
	max	$^{\circ}\text{C}$	70
Storage temperature			
	min	$^{\circ}\text{C}$	-60


	max	°C	80
Max altitude	m		3000
Resistance & Protection			
Pollution degree			3

**Dimensions**

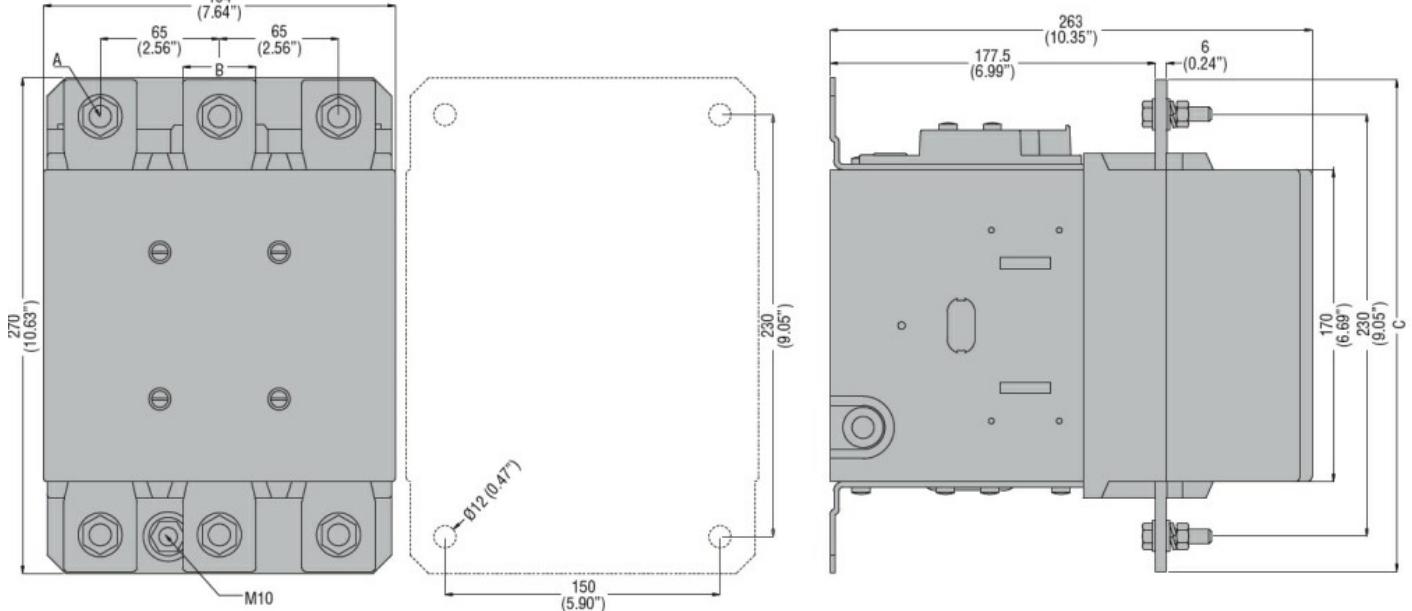

CONTACTOR TYPE	A	B	C
B500	M10	35 (1.38")	265 (10.43")
B630	M12	40 (1.57")	270 (10.63")

**Wiring diagrams**

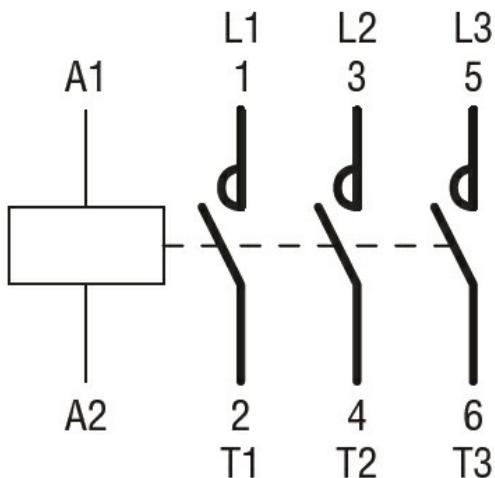

**Certifications and compliance**

**Compliance**

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

**Certificates**

CCC

---

cULus  
EAC

ETIM classification

ETIM 8.0

EC000066 -  
Power contactor,  
AC switching