




Contact characteristics

Number of poles	Nr.	3
Operational current I_e		
Rated operational power AC-3 ($T \leq 55^\circ C$)	AC-4 (400V) A	260


400V kW 355

Dimensions

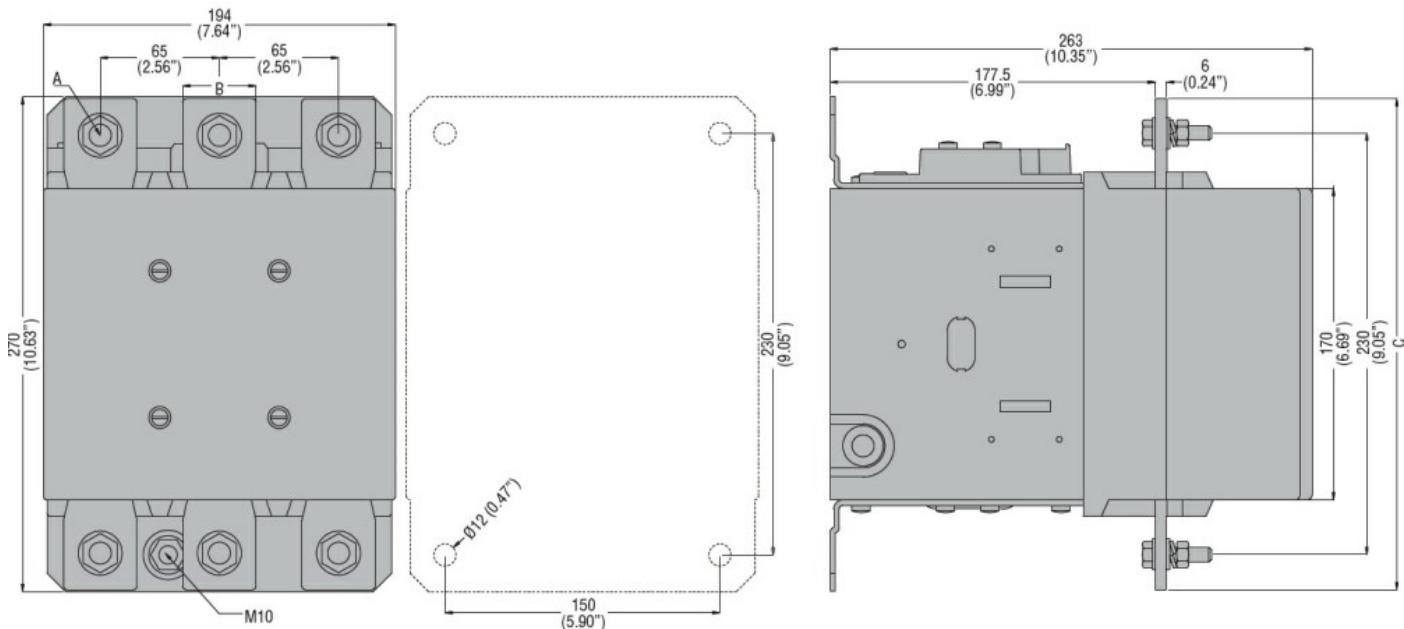

CONTACTOR TYPE	A	B	C
B500	M10	35 (1.38")	265 (10.43")
B630	M12	40 (1.57")	270 (10.63")

Wiring diagrams

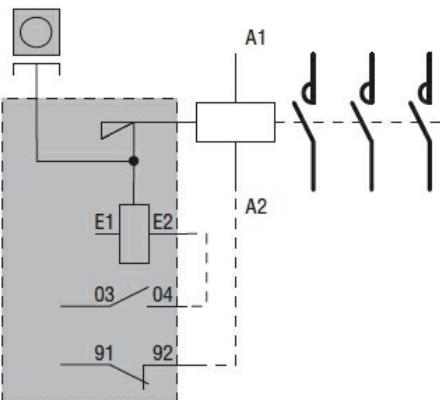

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

cULus