



Product designation	Auxiliary contactor		
Product type designation	BG00		
Contact characteristics			
Number of poles	Nr.	4	
Rated insulation voltage Ui IEC/EN	V	690	
Rated impulse withstand voltage Uimp	kV	6	
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current Ith	A	10	
Protection fuse	gG (IEC)	A	16
Tightening torque for terminals	min	Nm	0.8
	max	Nm	1
	min	lbin	9
	max	lbin	9
Tightening torque for coil terminal	min	Nm	0.8
	max	Nm	1
	min	lbin	9
	max	lbin	9
Max number of wires simultaneously connectable	Nr.	2	
Conductor section			
AWG/Kcmil	max		12
Flexible w/o lug conductor section	min	mm ²	0.75
	max	mm ²	2.5
Flexible c/w lug conductor section	min	mm ²	1.5
	max	mm ²	2.5
Flexible with insulated spade lug conductor section	min	mm ²	1.5
	max	mm ²	2.5
Power terminal protection according to IEC/EN 60529	IP20 when wired		
Mechanical features			
Operating position	normal allowable		Vertical plan ±30°
Fixing	Screw / DIN rail 35mm		
Weight	g	180	
Conductor section			

AWG/kcmil conductor section	max	12
Auxiliary contact characteristics		
Thermal current I_{th}	A	10
IEC/EN 60947-5-1 designation		A600 - Q600
Operating current AC15		
230V	A	3
400V	A	1.9
500V	A	1.4
Operating current DC12	110V	A 2.9
Operating current DC13		
24V	A	2.9
48V	A	1.4
60V	A	1.2
110V	A	0.6
125V	A	0.55
220V	A	0.3
600V	A	0.1
Operations		
Mechanical life	cycles	20000000
Safety related data		
Performance level B10d according to EN/ISO 13489-1	mechanical load	cycles 20000000
Mirror contacts according to IEC/EN 609474-4-1		YES
EMC compatibility		yes
AC coil operating		
Rated AC voltage at 60Hz	V	24
AC operating voltage		
of 60Hz coil powered at 60Hz		
pick-up	min	%Us 75
	max	%Us 115
drop-out	min	%Us 20
	max	%Us 55
AC average coil consumption at 20°C		
of 50/60Hz coil powered at 50Hz	in-rush	VA 30
	holding	VA 4
of 50/60Hz coil powered at 60Hz	in-rush	VA 25
	holding	VA 3
of 60Hz coil powered at 60Hz	in-rush	VA 30
	holding	VA 4
Dissipation at holding $\leq 20^\circ\text{C}$ 50Hz	W	0.95
Max cycles frequency		
Mechanical operation	cycles/h	3600
Operating times		
Average time for Us control		
in AC	Closing NO	

		min	ms	12
		max	ms	21
Opening NO				
		min	ms	9
		max	ms	18
Closing NC				
		min	ms	17
		max	ms	26
Opening NC				
		min	ms	7
		max	ms	17
<hr/>				
in DC				
Closing NO				
		min	ms	18
		max	ms	25
Opening NO				
		min	ms	2
		max	ms	3
Closing NC				
		min	ms	3
		max	ms	5
Opening NC				
		min	ms	11
		max	ms	17

UL technical data

General USE

Contactors

Contact rating of auxiliary contacts according to UL	AC current	A	160
			A600 - Q600

Contact rating of auxiliary contacts according to UL

Ambient conditions

Temperature

Operating temperature

Operating temperature	min	°C	-50
	max	°C	+70

Storage temperature



	min	°C	-60
	max	°C	+80

Max altitude


Resistance & Protection

Pollution degree

Dimensions

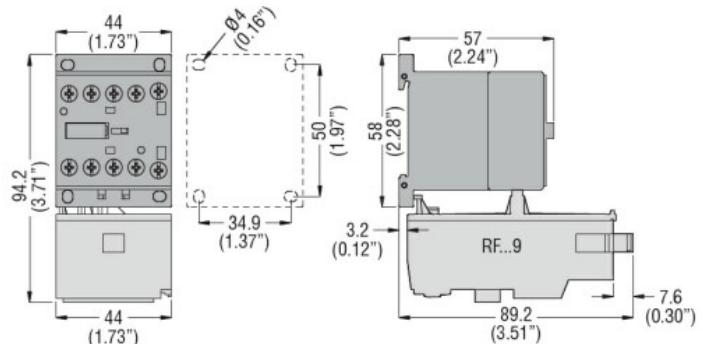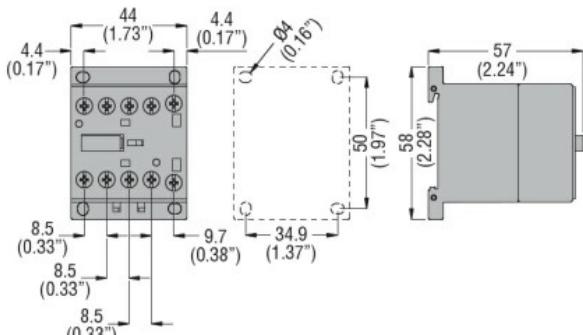

Wiring diagrams

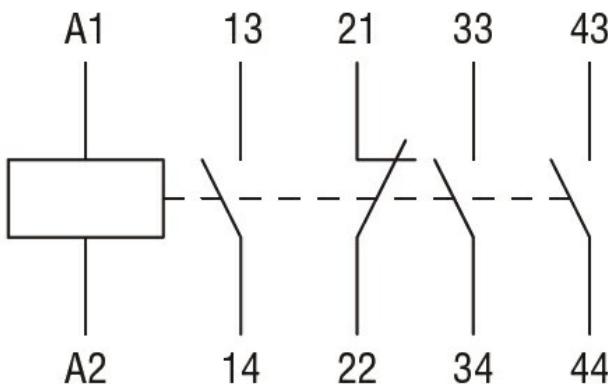

Certifications and compliance

Compliance

[CSA C22.2 n° 60947-1](#)

[CSA C22.2 n° 60947-5-1](#)

[IEC/EN 60947-1](#)

[IEC/EN 60947-5-1](#)

[UL 60947-1](#)

[UL 60947-5-1](#)

Certificates

[cULus](#)

[EAC](#)

ETIM classification

ETIM 8.0

EC000196 -
Contactor relay