



Product designation

Product type designation

Auxiliary
contactor
BG00

Contact characteristics

Number of poles	Nr.	4
Rated insulation voltage U_i IEC/EN	V	690
Rated impulse withstand voltage U_{imp}	kV	6
Operational frequency	min	Hz 25
	max	Hz 400
IEC Conventional free air thermal current I_{th}	A	10
Protection fuse	gG (IEC)	A 16
Tightening torque for terminals	min	Nm 0.8
	max	Nm 1
	min	lbin 9
	max	lbin 9
Tightening torque for coil terminal	min	Nm 0.8
	max	Nm 1
	min	lbin 9
	max	lbin 9
Max number of wires simultaneously connectable	Nr.	2

Conductor section

AWG/Kcmil

	max	12
Flexible w/o lug conductor section	min	mm ² 0.75
	max	mm ² 2.5
Flexible c/w lug conductor section	min	mm ² 1.5
	max	mm ² 2.5
Flexible with insulated spade lug conductor section	min	mm ² 1.5
	max	mm ² 2.5

Power terminal protection according to IEC/EN 60529

IP20 when wired

Mechanical features

Operating position

normal
allowable

Vertical plan
±30°

Fixing

Screw / DIN rail
35mm

Weight

g 180

Conductor section

AWG/kcmil conductor section

		max	12
Auxiliary contact characteristics			
Thermal current I _{th}		A	10
IEC/EN 60947-5-1 designation		A600 - Q600	
Operating current AC15		230V	A 3
		400V	A 1.9
		500V	A 1.4
Operating current DC12		110V	A 2.9
Operating current DC13		24V	A 2.9
		48V	A 1.4
		60V	A 1.2
		110V	A 0.6
		125V	A 0.55
		220V	A 0.3
		600V	A 0.1
Operations			
Mechanical life		cycles	20000000
Safety related data			
Performance level B10d according to EN/ISO 13489-1		mechanical load	cycles 20000000
Mirror contats according to IEC/EN 609474-4-1		YES	
EMC compatibility		yes	
AC coil operating			
Rated AC voltage at 60Hz		V	120
AC operating voltage		of 60Hz coil powered at 60Hz	
		pick-up	
		min	%Us 75
		max	%Us 115
		drop-out	
		min	%Us 20
		max	%Us 55
AC average coil consumption at 20°C		of 50/60Hz coil powered at 50Hz	
		in-rush	VA 30
		holding	VA 4
of 50/60Hz coil powered at 60Hz		in-rush	VA 25
		holding	VA 3
of 60Hz coil powered at 60Hz		in-rush	VA 30
		holding	VA 4
Dissipation at holding ≤20°C 50Hz		W	0.95
Max cycles frequency			
Mechanical operation		cycles/h	3600
Operating times			
Average time for U _s control		in AC	
		Closing NO	

in DC	Opening NO	min	ms	12
		max	ms	21
	Closing NC	min	ms	9
		max	ms	18
	Opening NC	min	ms	17
		max	ms	26
		min	ms	7
		max	ms	17
	Closing NO	min	ms	18
		max	ms	25
	Opening NO	min	ms	2
		max	ms	3
Closing NC	min	ms	3	
	max	ms	5	
Opening NC	min	ms	11	
	max	ms	17	

UL technical data

General USE

Contactor

AC current A 160

Contact rating of auxiliary contacts according to UL

A600 - Q600

Ambient conditions

Temperature

Operating temperature

min °C -50
max °C +70

Storage temperature

min °C -60
max °C +80

Max altitude


m 3000

Resistance & Protection


Pollution degree

3

Dimensions

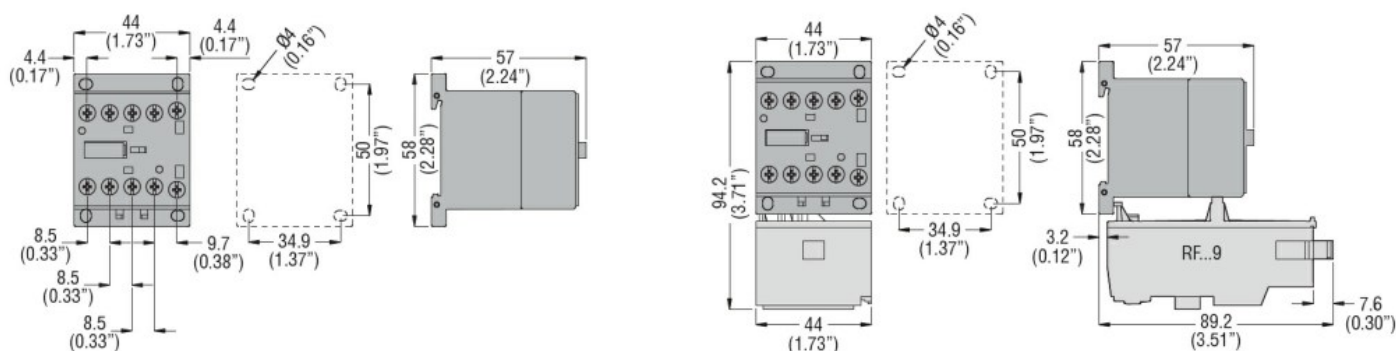

Wiring diagrams

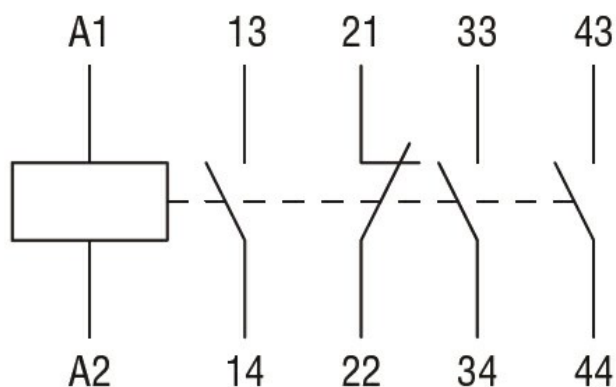

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-5-1

IEC/EN 60947-1

IEC/EN 60947-5-1

UL 60947-1

UL 60947-5-1

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000196 -
Contactor relay