



Product designation			Auxiliary contactor
Product type designation			BG00
Contact characteristics			
Number of poles	Nr.	4	
Rated insulation voltage Ui IEC/EN	V	690	
Rated impulse withstand voltage Uimp	kV	6	
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current Ith	A	10	
Protection fuse	gG (IEC)	A	16
Tightening torque for terminals	min	Nm	0.8
	max	Nm	1
	min	lbin	9
	max	lbin	9
Tightening torque for coil terminal	min	Nm	0.8
	max	Nm	1
	min	lbin	9
	max	lbin	9
Max number of wires simultaneously connectable	Nr.	2	
Conductor section			
AWG/Kcmil	max	12	
Flexible w/o lug conductor section	min	mm²	0.75
	max	mm²	2.5
Flexible c/w lug conductor section	min	mm²	1.5
	max	mm²	2.5
Flexible with insulated spade lug conductor section	min	mm²	1.5
	max	mm²	2.5
Power terminal protection according to IEC/EN 60529			IP20 when wired
Mechanical features			
Operating position	normal	Vertical plan	
	allowable	±30°	
Fixing			Screw / DIN rail 35mm
Weight	g	179	
Conductor section			

AWG/kcmil conductor section

		max	12
Auxiliary contact characteristics			
Thermal current I _{th}		A	10
IEC/EN 60947-5-1 designation		A600 - Q600	
Operating current AC15		230V	A 3
		400V	A 1.9
		500V	A 1.4
Operating current DC12		110V	A 2.9
Operating current DC13		24V	A 2.9
		48V	A 1.4
		60V	A 1.2
		110V	A 0.6
		125V	A 0.55
		220V	A 0.3
		600V	A 0.1
Operations			
Mechanical life		cycles	20000000
Safety related data			
Performance level B10d according to EN/ISO 13489-1		mechanical load	cycles 20000000
Mirror contats according to IEC/EN 609474-4-1		YES	
EMC compatibility		yes	
AC coil operating			
Rated AC voltage at 60Hz		V	120
AC operating voltage			
of 60Hz coil powered at 60Hz			
pick-up		min	%Us 75
		max	%Us 115
drop-out		min	%Us 20
		max	%Us 55
AC average coil consumption at 20°C			
of 50/60Hz coil powered at 50Hz		in-rush	VA 30
		holding	VA 4
of 50/60Hz coil powered at 60Hz		in-rush	VA 25
		holding	VA 3
of 60Hz coil powered at 60Hz		in-rush	VA 30
		holding	VA 4
Dissipation at holding =20°C 50Hz		W	0.95
Max cycles frequency			
Mechanical operation		cycles/h	3600
Operating times			
Average time for U _s control			
in AC			
Closing NO			

in DC	Opening NO	min	ms	12
		max	ms	21
	Closing NC	min	ms	9
		max	ms	18
	Opening NC	min	ms	17
		max	ms	26
		min	ms	7
		max	ms	17
	Closing NO	min	ms	18
		max	ms	25
	Opening NO	min	ms	2
		max	ms	3
Closing NC	min	ms	3	
	max	ms	5	
Opening NC	min	ms	11	
	max	ms	17	

UL technical data

General USE

Contactor

AC current	A	160
Contact rating of auxiliary contacts according to UL	A600 - Q600	

Ambient conditions

Temperature

Operating temperature

min	°C	-50
max	°C	+70

Storage temperature

min	°C	-60
max	°C	+80

Max altitude


m 3000

Resistance & Protection


Pollution degree

3

Dimensions

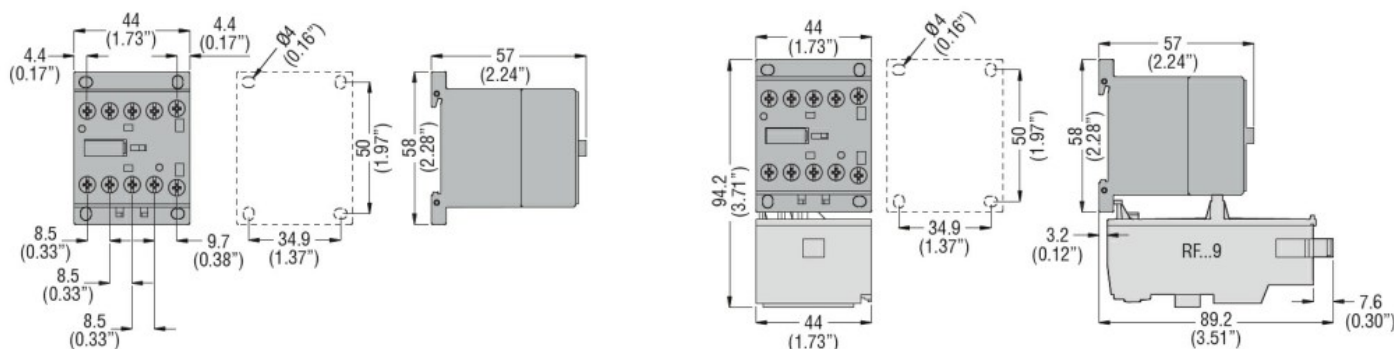

Wiring diagrams

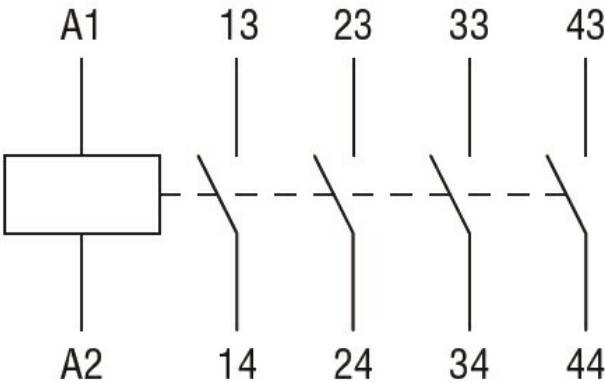

Certifications and compliance

Compliance	CSA C22.2 n° 60947-1
	CSA C22.2 n° 60947-5-1
	IEC/EN 60947-1
	IEC/EN 60947-5-1
	UL 60947-1
	UL 60947-5-1
Certificates	CCC
	cULus
	EAC

ETIM classification

ETIM 8.0	EC000196 - Contactor relay
----------	-------------------------------