



| | | | |
|---|---|-----|-----|
| Product designation | Power contactor | | |
| Product type designation | BG09 | | |
| Contact characteristics | | | |
| Number of poles | Nr. | 3 | |
| Rated insulation voltage U_i IEC/EN | V | 690 | |
| Rated impulse withstand voltage U_{imp} | kV | 6 | |
| Operational frequency | min | Hz | 25 |
| | max | Hz | 400 |
| IEC Conventional free air thermal current I_{th} | | A | 20 |
| Operational current I_e | AC-1 ($\leq 40^\circ C$) A 20 AC-1 ($\leq 55^\circ C$) A 0 AC-3 ($440V \leq 55^\circ C$) A 9 AC-4 (400V) A 4 | | |
| Rated operational power AC-3 ($T \leq 55^\circ C$) | 230V | kW | 2.2 |
| | 400V | kW | 4 |
| | 415V | kW | 4.3 |
| | 440V | kW | 4.5 |
| | 500V | kW | 5 |
| | 690V | kW | 5 |
| Rated operational power AC-1 ($T \leq 40^\circ C$) | 230V | kW | 8 |
| | 400V | kW | 14 |
| | 500V | kW | 16 |
| | 690V | kW | 22 |
| IEC max current I_e in DC1 with $L/R \leq 1ms$ with 1 poles in series | $\leq 24V$ | A | 12 |
| | 48V | A | 10 |
| | 75V | A | 4 |
| | 110V | A | 3 |
| | 220V | A | — |
| IEC max current I_e in DC1 with $L/R \leq 1ms$ with 2 poles in series | $\leq 24V$ | A | 15 |
| | 48V | A | 14 |
| | 75V | A | 9 |
| | 110V | A | 8 |
| | 220V | A | — |
| IEC max current I_e in DC1 with $L/R \leq 1ms$ with 3 poles in series | $\leq 24V$ | A | 16 |
| | 48V | A | 16 |
| | 75V | A | 10 |
| | 110V | A | 10 |
| | 220V | A | 2 |

IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 4 poles in series

| | | |
|------------|---|----|
| $\leq 24V$ | A | 16 |
| 48V | A | 16 |
| 75V | A | 10 |
| 110V | A | 10 |
| 220V | A | 2 |

IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 1 poles in series

| | | |
|------------|---|---|
| $\leq 24V$ | A | 7 |
| 48V | A | 6 |
| 75V | A | 2 |
| 110V | A | 1 |
| 220V | A | — |

IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 2 poles in series

| | | |
|------------|---|---|
| $\leq 24V$ | A | 8 |
| 48V | A | 8 |
| 75V | A | 5 |
| 110V | A | 4 |
| 220V | A | — |

IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 3 poles in series

| | | |
|------------|---|-----|
| $\leq 24V$ | A | 10 |
| 48V | A | 10 |
| 75V | A | 6 |
| 110V | A | 5 |
| 220V | A | 0,8 |

IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 4 poles in series

| | | |
|------------|---|-----|
| $\leq 24V$ | A | 10 |
| 48V | A | 10 |
| 75V | A | 6 |
| 110V | A | 5 |
| 220V | A | 0,8 |

Short-time allowable current for 10s (IEC/EN60947-1) A 96

Protection fuse

| | | |
|----------|---|----|
| gG (IEC) | A | 20 |
| aM (IEC) | A | 10 |

Making capacity (RMS value) A 92

Breaking capacity at voltage

| | | |
|------|---|----|
| 440V | A | 72 |
| 500V | A | 72 |
| 690V | A | 72 |

Resistance per pole (average value) m? 10

Power dissipation per pole (average value)

| | | |
|-----------------|---|------|
| I _{th} | W | 4 |
| AC3 | W | 0.81 |

Tightening torque for terminals

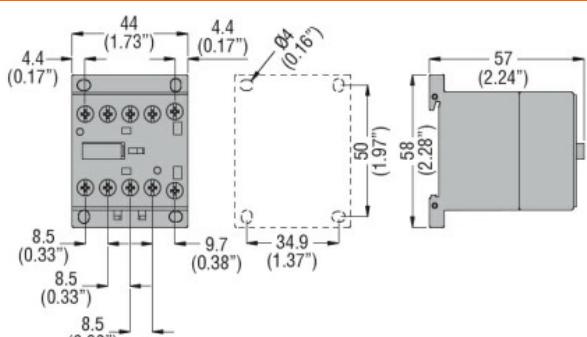
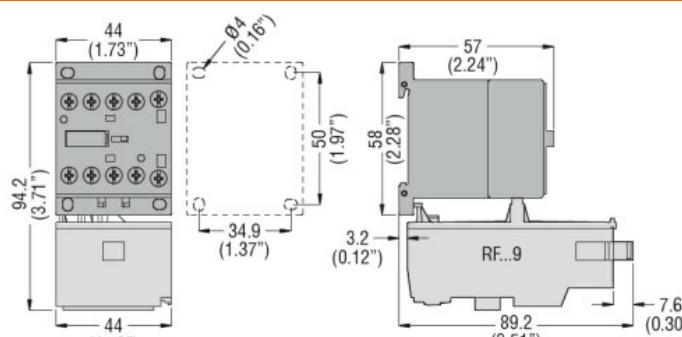
| | | |
|-----|------|-----|
| min | Nm | 0.8 |
| max | Nm | 1 |
| min | lbin | 9 |
| max | lbin | 9 |

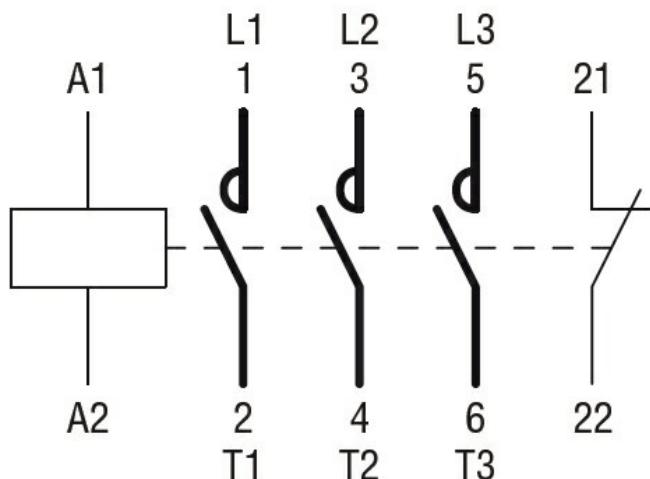
Tightening torque for coil terminal

| | | |
|-----|------|-----|
| min | Nm | 0.8 |
| max | Nm | 1 |
| min | lbin | 9 |
| max | lbin | 9 |

| | | |
|---|-----------------------|----------------------|
| Max number of wires simultaneously connectable | Nr. | 2 |
| Conductor section | | |
| AWG/Kcmil | max | 12 |
| Flexible w/o lug conductor section | min | mm ² 0.75 |
| | max | mm ² 2.5 |
| Flexible c/w lug conductor section | min | mm ² 1.5 |
| | max | mm ² 2.5 |
| Flexible with insulated spade lug conductor section | min | mm ² 1.5 |
| | max | mm ² 2.5 |
| Power terminal protection according to IEC/EN 60529 | IP20 when wired | |
| Mechanical features | | |
| Operating position | normal allowable | Vertical plan ±30° |
| Fixing | Screw / DIN rail 35mm | |
| Weight | g | 177 |
| Conductor section | | |
| AWG/kcmil conductor section | max | 12 |
| Auxiliary contact characteristics | | |
| Thermal current Ith | A | 10 |
| IEC/EN 60947-5-1 designation | A600 - Q600 | |
| Operating current AC15 | 230V | A 3 |
| | 400V | A 1.9 |
| | 500V | A 1.4 |
| Operating current DC12 | 110V | A 2.9 |
| Operating current DC13 | 24V | A 2.9 |
| | 48V | A 1.4 |
| | 60V | A 1.2 |
| | 110V | A 0.6 |
| | 125V | A 0.55 |
| | 220V | A 0.3 |
| | 600V | A 0.1 |
| Operations | | |
| Mechanical life | cycles | 20000000 |
| Electrical life | cycles | 500000 |
| Safety related data | | |
| Performance level B10d according to EN/ISO 13489-1 | rated load | cycles 500000 |
| | mechanical load | cycles 20000000 |
| Mirror contacts according to IEC/EN 609474-4-1 | yes | |
| EMC compatibility | yes | |
| AC coil operating | | |
| Rated AC voltage at 50/60Hz | V | 400 |
| AC operating voltage | | |

| | | | | |
|-------------------------------------|---------|---------|----------|------|
| of 50/60Hz coil powered at 50Hz | pick-up | min | %Us | 75 |
| | | max | %Us | 115 |
| drop-out | | min | %Us | 20 |
| | | max | %Us | 55 |
| of 50/60Hz coil powered at 60Hz | pick-up | min | %Us | 80 |
| | | max | %Us | 115 |
| drop-out | | min | %Us | 20 |
| | | max | %Us | 55 |
| AC average coil consumption at 20°C | | | | |
| of 50/60Hz coil powered at 50Hz | | in-rush | VA | 30 |
| | | holding | VA | 4 |
| of 50/60Hz coil powered at 60Hz | | in-rush | VA | 25 |
| | | holding | VA | 3 |
| of 60Hz coil powered at 60Hz | | in-rush | VA | 30 |
| | | holding | VA | 4 |
| Dissipation at holding ≤20°C 50Hz | | | W | 0.95 |
| Max cycles frequency | | | | |
| Mechanical operation | | | cycles/h | 3600 |
| Operating times | | | | |
| Average time for Us control | | | | |
| in AC | | | | |
| Closing NO | | min | ms | 12 |
| | | max | ms | 21 |
| Opening NO | | min | ms | 9 |
| | | max | ms | 18 |
| Closing NC | | min | ms | 17 |
| | | max | ms | 26 |
| Opening NC | | min | ms | 7 |
| | | max | ms | 17 |
| in DC | | | | |
| Closing NO | | min | ms | 18 |
| | | max | ms | 25 |
| Opening NO | | min | ms | 2 |
| | | max | ms | 3 |
| Closing NC | | min | ms | 3 |
| | | max | ms | 5 |
| Opening NC | | min | ms | 11 |

| | max | ms | 17 |
|--|-----------------------|----|------|
| UL technical data | | | |
| Full-load current (FLA) for three-phase AC motor | | | |
| | at 480V | A | 7.6 |
| | at 600V | A | 6.1 |
| Yielded mechanical performance | | | |
| for single-phase AC motor | | | |
| | 110/120V | HP | 0.5 |
| | 230V | HP | 1.5 |
| for three-phase AC motor | | | |
| | 200/208V | HP | 2 |
| | 220/230V | HP | 3 |
| | 460/480V | HP | 5 |
| | 575/600V | HP | 5 |
| General USE | | | |
| Contactor | | | |
| | AC current | A | 20 |
| Short-circuit protection fuse, 600V | | | |
| High fault | | | |
| | Short circuit current | kA | 100 |
| | Fuse rating | A | 30 |
| | Fuse class | | J |
| Standard fault | | | |
| | Short circuit current | kA | 5 |
| | Fuse rating | A | 30 |
| Contact rating of auxiliary contacts according to UL | | | |
| A600 - Q600 | | | |
| Ambient conditions | | | |
| Temperature | | | |
| Operating temperature | | | |
| | min | °C | -50 |
| | max | °C | +70 |
| Storage temperature | | | |
| | min | °C | -60 |
| | max | °C | +80 |
| Max altitude | | | |
| | | m | 3000 |
| Resistance & Protection | | | |
| Pollution degree | | | |
| Dimensions | | | |
|  | | | |
|  | | | |
| Wiring diagrams | | | |



Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching