



Product designation	Auxiliary contactor		
Product type designation	BG12		
Contact characteristics			
Number of poles	Nr.	3	
Rated insulation voltage U_i IEC/EN	V	690	
Rated impulse withstand voltage U_{imp}	kV	6	
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current I_{th}	A	20	
Operational current I_e			
AC-1 ($\leq 40^\circ C$)	A	20	
AC-1 ($\leq 55^\circ C$)	A	18	
AC-1 ($\leq 70^\circ C$)	A	15	
AC-3 ($\leq 440V \leq 55^\circ C$)	A	12	
AC-4 (400V)	A	4.8	
Rated operational power AC-3 ($T \leq 55^\circ C$)			
230V	kW	3.2	
400V	kW	5.7	
415V	kW	6.2	
440V	kW	5.5	
500V	kW	5	
690V	kW	5	
Rated operational power AC-1 ($T \leq 40^\circ C$)			
230V	kW	8	
400V	kW	14	
500V	kW	16	
690V	kW	22	
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 1 poles in series			
$\leq 24V$	A	12	
48V	A	10	
75V	A	4	
110V	A	3	
220V	A	—	
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 2 poles in series			
$\leq 24V$	A	15	
48V	A	14	
75V	A	9	
110V	A	8	
220V	A	—	
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 3 poles in series			
$\leq 24V$	A	16	
48V	A	16	
75V	A	10	
110V	A	10	

	220V	A	2
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 4 poles in series			
≤24V	A	—	
48V	A	—	
75V	A	—	
110V	A	—	
220V	A	—	
IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 1 poles in series			
≤24V	A	7	
48V	A	6	
75V	A	2	
110V	A	1	
220V	A	—	
IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 2 poles in series			
≤24V	A	8	
48V	A	8	
75V	A	5	
110V	A	4	
220V	A	—	
IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 3 poles in series			
≤24V	A	10	
48V	A	10	
75V	A	6	
110V	A	5	
220V	A	0,8	
IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 4 poles in series			
≤24V	A	—	
48V	A	—	
75V	A	—	
110V	A	—	
220V	A	—	
Short-time allowable current for 10s (IEC/EN60947-1)		A	96
Protection fuse			
gG (IEC)	A	20	
aM (IEC)	A	16	
Making capacity (RMS value)		A	120
Breaking capacity at voltage			
440V	A	96	
500V	A	72	
690V	A	72	
Resistance per pole (average value)		m?	10
Power dissipation per pole (average value)			
I _{th}	W	4	
AC3	W	1.4	
Tightening torque for terminals			
min	Nm	0.8	
max	Nm	1	
min	lbin	9	
max	lbin	9	
Tightening torque for coil terminal			
min	Nm	0.8	
max	Nm	1	
min	lbin	9	

	max	lbin	9
Max number of wires simultaneously connectable	Nr.	2	
Conductor section			
AWG/Kcmil			
Flexible w/o lug conductor section	max	12	
	min	mm ²	0.8
	max	mm ²	2.5
Flexible c/w lug conductor section	min	mm ²	1.5
	max	mm ²	2.5
Flexible with insulated spade lug conductor section	min	mm ²	1.5
	max	mm ²	2.5
Power terminal protection according to IEC/EN 60529			IP20
Mechanical features			
Operating position	normal allowable		Vertical plan ±30°
Fixing			Screw / DIN rail 35mm
Weight	g	200	
Conductor section			
AWG/kcmil conductor section			
	max	12	
Auxiliary contact characteristics			
Thermal current Ith	A	10	
IEC/EN 60947-5-1 designation			Q600
Operating current AC15			
	230V	A	3
	400V	A	1.9
	500V	A	1.4
Operating current DC12	110V	A	2.9
Operating current DC13			
	24V	A	2.9
	48V	A	1.4
	60V	A	1.2
	110V	A	0.6
	125V	A	0.55
	220V	A	0.3
	600V	A	0.1
Operations			
Mechanical life	cycles	20000000	
Electrical life	cycles	500000	
Safety related data			
Performance level B10d according to EN/ISO 13489-1			
	rated load	cycles	500000
	mechanical load	cycles	20000000
Mirror contacts according to IEC/EN 609474-4-1			YES
EMC compatibility			YES
DC coil operating			
DC rated control voltage	V	110	

DC operating voltage

pick-up	min	%Us	75
	max	%Us	115
drop-out	min	%Us	10
	max	%Us	25

Average coil consumption $\leq 20^{\circ}\text{C}$

in-rush	W	3.2
holding	W	3.2

Max cycles frequency

Mechanical operation cycles/h 3600

Operating times

Average time for Us control
in AC

Closing NO	min	ms	12
	max	ms	21
Opening NO	min	ms	9
	max	ms	18
Closing NC	min	ms	17
	max	ms	26
Opening NC	min	ms	7
	max	ms	17

in DC

Closing NO	min	ms	18
	max	ms	25
Opening NO	min	ms	2
	max	ms	3
Closing NC	min	ms	3
	max	ms	5
Opening NC	min	ms	11
	max	ms	17

UL technical data

Full-load current (FLA) for three-phase AC motor

at 480V	A	11
at 600V	A	11

Yielded mechanical performance

for single-phase AC motor

110/120V	HP	0.5
230V	HP	1.5

for three-phase AC motor

200/208V	HP	3
220/230V	HP	3
460/480V	HP	7.5
575/600V	HP	10

General USE

Contactor	AC current	A	20
Short-circuit protection fuse, 600V			
High fault	Short circuit current	kA	100
	Fuse rating	A	30
	Fuse class		J
Standard fault	Short circuit current	kA	5
	Fuse rating	A	30

Contact rating of auxiliary contacts according to UL A600 - Q600

Ambient conditions

Temperature

Operating temperature	min	°C	-50
	max	°C	+70


Storage temperature	min	°C	-60
	max	°C	+80

Max altitude m 3000


Resistance & Protection

Pollution degree 3

Dimensions

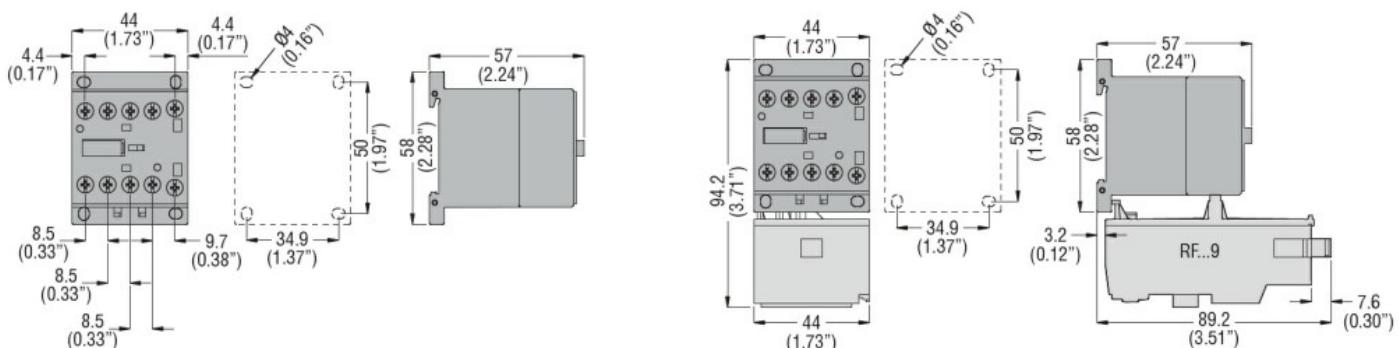

Wiring diagrams

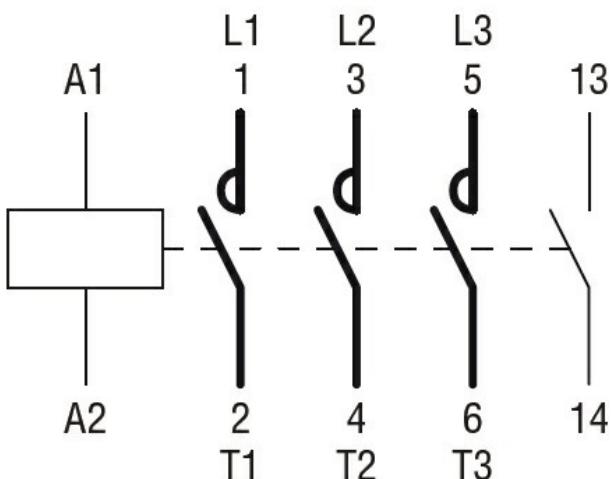

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching