



Auxiliary
contactor
BGF00

Product designation

Product type designation

Contact characteristics

Number of poles	Nr.	4
Rated insulation voltage U_i IEC/EN	V	690
Rated impulse withstand voltage U_{imp}	kV	6
Operational frequency	min max	Hz Hz 25 400
IEC Conventional free air thermal current I_{th}	A	10
Short-time allowable current for 10s (IEC/EN60947-1)	A	0
Protection fuse	gG (IEC)	A 16
Tightening torque for terminals	min max min max	Nm Nm lbin lbin 0.8 1 9 9
Tightening torque for coil terminal	min max min max	Nm Nm lbin lbin 0.8 1 9 9
Max number of wires simultaneously connectable	Nr.	2

Conductor section

AWG/Kcmil

	max	12
Flexible w/o lug conductor section	min max	mm ² mm ² 0.75 2.5
Flexible c/w lug conductor section	min max	mm ² mm ² 1.5 2.5
Flexible with insulated spade lug conductor section	min max	mm ² mm ² 1.5 2.5

Power terminal protection according to IEC/EN 60529 IP20 when wired


Mechanical features

Operating position


	normal allowable	Vertical plan $\pm 30^\circ$
Fixing		Screw / DIN rail 35mm
Weight	g	178

Conductor section	AWG/kcmil conductor section		
	max	12	
Auxiliary contact characteristics			
Thermal current I _{th}	A	10	
IEC/EN 60947-5-1 designation	A600 - Q600		
Operating current AC15	230V	A	3
	400V	A	1.9
	500V	A	1.4
Operating current DC12	110V	A	2.9
Operating current DC13	24V	A	2.9
	48V	A	1.4
	60V	A	1.1
	125V	A	0.3
	220V	A	0.1
	600V	A	0.6
Operations			
Mechanical life	cycles	20000000	
Safety related data			
Performance level B10d according to EN/ISO 13489-1	mechanical load	cycles	20000000
Mirror contats according to IEC/EN 609474-4-1	YES		
EMC compatibility	yes		
AC coil operating			
Rated AC voltage at 50/60Hz	V	24	
AC operating voltage			
of 50/60Hz coil powered at 50Hz			
pick-up	min	%Us	75
	max	%Us	115
drop-out	min	%Us	20
	max	%Us	55
of 50/60Hz coil powered at 60Hz			
pick-up	min	%Us	80
	max	%Us	115
drop-out	min	%Us	20
	max	%Us	55
AC average coil consumption at 20°C			
of 50/60Hz coil powered at 50Hz	in-rush	VA	30
	holding	VA	4
of 50/60Hz coil powered at 60Hz	in-rush	VA	25
	holding	VA	3
of 60Hz coil powered at 60Hz	in-rush	VA	30
	holding	VA	4

Dissipation at holding ≤20°C 50Hz			W	0.95
Max cycles frequency				
Mechanical operation			cycles/h	3600
Operating times				
Average time for Us control				
in AC				
Closing NO			min	ms 12
			max	ms 21
Opening NO			min	ms 9
			max	ms 18
Closing NC			min	ms 17
			max	ms 26
Opening NC			min	ms 7
			max	ms 17
in DC				
Closing NO			min	ms 18
			max	ms 25
Opening NO			min	ms 2
			max	ms 3
Closing NC			min	ms 3
			max	ms 5
Opening NC			min	ms 11
			max	ms 17
UL technical data				
Contact rating of auxiliary contacts according to UL			A600 - Q600	
Ambient conditions				
Temperature				
Operating temperature			min	°C -50
			max	°C +70
Storage temperature			min	°C -60
			max	°C +80
Max altitude			m	3000
Resistance & Protection				
Pollution degree			3	
Dimensions				

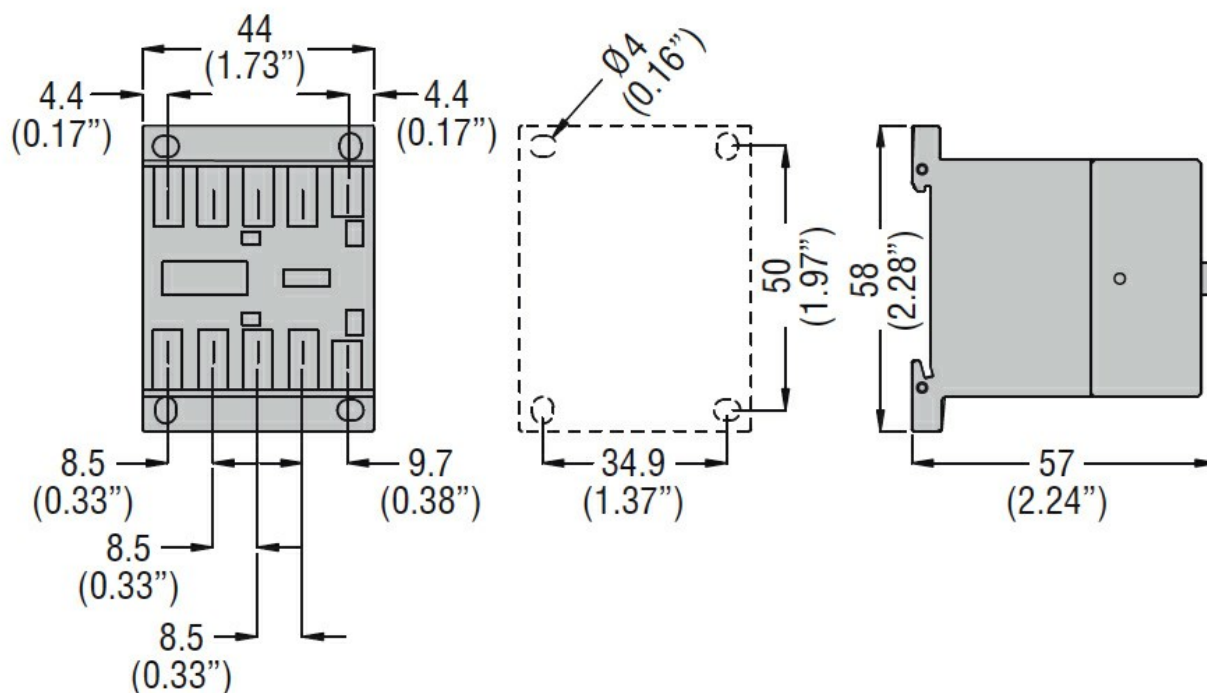

Wiring diagrams

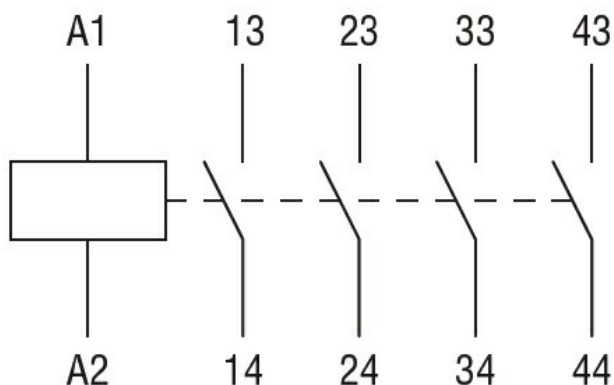

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1
CSA C22.2 n° 60947-5-1
IEC/EN 60947-1
IEC/EN 60947-5-1
UL 60947-1
UL 60947-5-1

Certificates

CCC
cULus
EAC

ETIM classification

ETIM 8.0

EC000196 -
Contactor relay