



Product designation	Power contactor BGP09		
Product type designation			
Contact characteristics			
Number of poles	Nr. 3		
Rated insulation voltage U_i IEC/EN	V 690		
Rated impulse withstand voltage U_{imp}	kV 6		
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current I_{th}	A 20		
Operational current I_e			
	AC-1 ($\leq 40^\circ C$)	A	20
	AC-1 ($\leq 55^\circ C$)	A	0
	AC-3 ($\leq 440V \leq 55^\circ C$)	A	9
	AC-4 (400V)	A	4
Rated operational power AC-3 ($T \leq 55^\circ C$)	230V	kW	2.2
	400V	kW	4
	415V	kW	4.3
	440V	kW	4.5
	500V	kW	5
Rated operational power AC-1 ($T \leq 40^\circ C$)	230V	kW	8
	400V	kW	14
	500V	kW	16
	690V	kW	22
Short-time allowable current for 10s (IEC/EN60947-1)	A 96		
Protection fuse			
	gG (IEC)	A	20
	aM (IEC)	A	10
Making capacity (RMS value)	A 92		
Breaking capacity at voltage			
	440V	A	72
	500V	A	72
	690V	A	72
Resistance per pole (average value)	m? 10		
Power dissipation per pole (average value)			
	I_{th}	W	4
	AC3	W	0.81
Tightening torque for terminals	min	Nm	0.8
	max	Nm	1
	min	Ibin	9
	max	Ibin	9
Tightening torque for coil terminal			

	min	Nm	0.8
	max	Nm	1
	min	lb/in	9
	max	lb/in	9
Max number of wires simultaneously connectable			Nr. 2
Conductor section			
AWG/Kcmil	max	12	
Flexible w/o lug conductor section	min	mm ²	0.8
	max	mm ²	2.5
Flexible c/w lug conductor section	min	mm ²	1.5
	max	mm ²	2.5
Flexible with insulated spade lug conductor section	min	mm ²	1.5
	max	mm ²	2.5
Power terminal protection according to IEC/EN 60529			IP00
Mechanical features			
Operating position	normal allowable	Vertical plan ±30°	
Fixing	Screw / DIN rail 35mm		
Weight	g	200	
Conductor section			
AWG/kcmil conductor section	max	12	
Auxiliary contact characteristics			
Thermal current I _{th}	A	10	
IEC/EN 60947-5-1 designation	A600 - Q600		
Operating current AC15	230V	A	3
	400V	A	1.9
	500V	A	1.4
Operating current DC12	110V	A	2.9
Operating current DC13	24V	A	2.9
	48V	A	1.4
	60V	A	1.1
	125V	A	0.3
	220V	A	0.1
	600V	A	0.6
Operations			
Mechanical life	cycles	20000000	
Electrical life	cycles	500000	
Safety related data			
Performance level B10d according to EN/ISO 13489-1	rated load	cycles	500000
	mechanical load	cycles	20000000
Mirror contacts according to IEC/EN 609474-4-1	yes		
EMC compatibility	yes		

AC coil operating

Rated AC voltage at 60Hz V 24

AC operating voltage

of 60Hz coil powered at 60Hz			
pick-up			
	min	%Us	75
	max	%Us	115
drop-out			
	min	%Us	20
	max	%Us	55

AC average coil consumption at 20°C

of 50/60Hz coil powered at 50Hz			
	in-rush	VA	30
	holding	VA	4
of 50/60Hz coil powered at 60Hz			
	in-rush	VA	25
	holding	VA	3
of 60Hz coil powered at 60Hz			
	in-rush	VA	30
	holding	VA	4

Dissipation at holding ≤20°C 50Hz W 0.95

Max cycles frequency

Mechanical operation cycles/h 3600

Operating times

Average time for Us control

in AC			
	Closing NO		
		min	ms 12
		max	ms 21
	Opening NO		
		min	ms 9
		max	ms 18
	Closing NC		
		min	ms 17
		max	ms 26
	Opening NC		
		min	ms 7
		max	ms 17


in DC			
	Closing NO		
		min	ms 18
		max	ms 25
	Opening NO		
		min	ms 2
		max	ms 3
	Closing NC		
		min	ms 3
		max	ms 5
	Opening NC		
		min	ms 11
		max	ms 17

UL technical data

Full-load current (FLA) for three-phase AC motor


at 480V A 7.6

	at 600V	A	6.1
Yielded mechanical performance			
for single-phase AC motor			
	110/120V 230V	HP HP	0.5 1.5
for three-phase AC motor			
	200/208V 220/230V 460/480V 575/600V	HP HP HP HP	2 3 5 5
General USE			
Contactor			
	AC current	A	20
Contact rating of auxiliary contacts according to UL			A600 - Q600
Ambient conditions			
Temperature			
Operating temperature	min max	°C °C	-50 +70
Storage temperature	min max	°C °C	-60 +80
Max altitude			m 3000
Resistance & Protection			
Pollution degree			3
Dimensions			

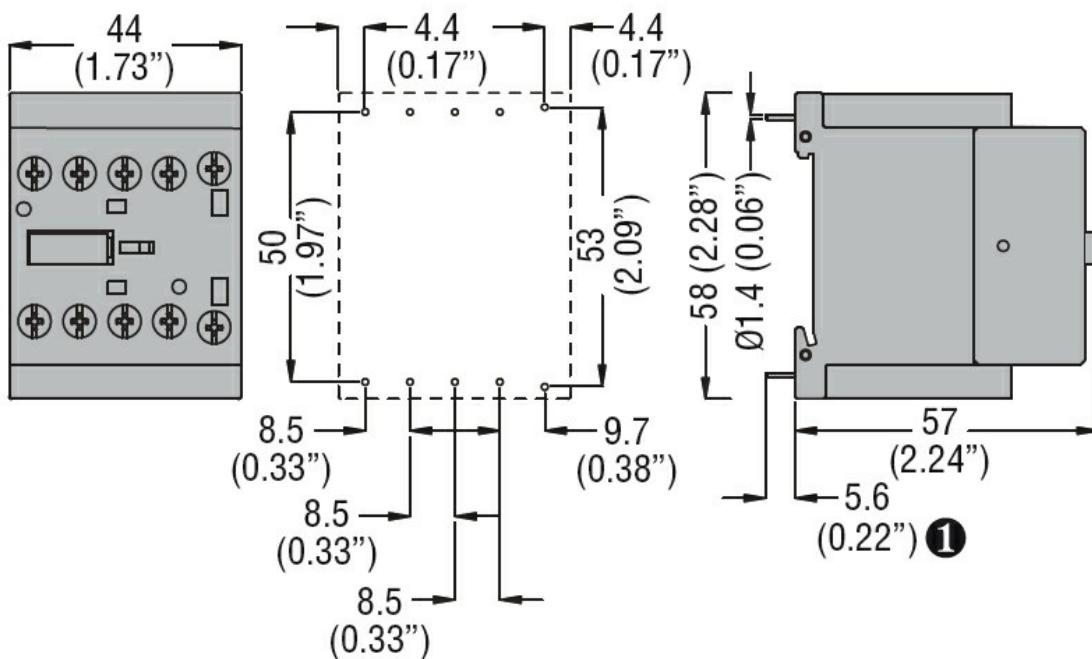

① Recommended PCB drillings 1.7-2mm.

Wiring diagrams

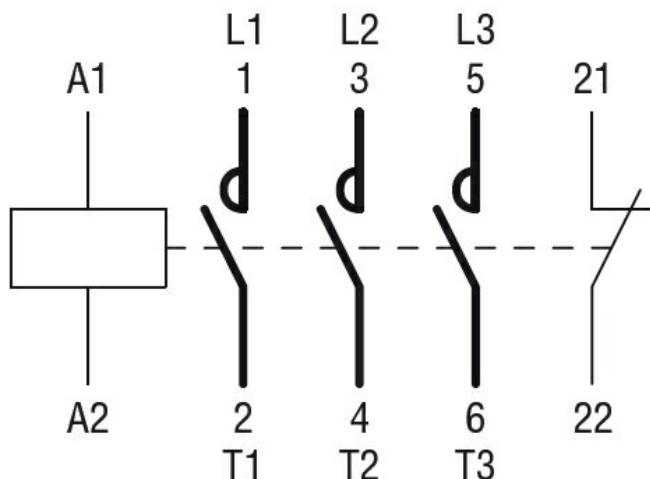

Certifications and compliance

Compliance

[CSA C22.2 n° 60947-1](#)

[CSA C22.2 n° 60947-4-1](#)

[IEC/EN 60947-1](#)

[IEC/EN 60947-4-1](#)

[UL 60947-1](#)

[UL 60947-4-1](#)

Certificates

[cURus](#)

[EAC](#)

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching