




| | | | |
|------------------------------------------------------------|---------------------------------------------------|------|------|
| Product designation | Power contactor BGP09 | | |
| Product type designation | | | |
| Contact characteristics | | | |
| Number of poles | Nr. | 3 | |
| Rated insulation voltage U_i IEC/EN | V | 690 | |
| Rated impulse withstand voltage U_{imp} | kV | 6 | |
| Operational frequency | min | Hz | 25 |
| | max | Hz | 400 |
| IEC Conventional free air thermal current I_{th} | A | 20 | |
| Operational current I_e | | | |
| | AC-1 ($\leq 40^\circ\text{C}$) | A | 20 |
| | AC-3 ($\leq 440\text{V} \leq 55^\circ\text{C}$) | A | 9 |
| | AC-4 (400V) | A | 4 |
| Rated operational power AC-3 ($T \leq 55^\circ\text{C}$) | 230V | kW | 2.2 |
| | 400V | kW | 4 |
| | 415V | kW | 4.3 |
| | 440V | kW | 4.5 |
| | 500V | kW | 5 |
| Rated operational power AC-1 ($T \leq 40^\circ\text{C}$) | 230V | kW | 8 |
| | 400V | kW | 14 |
| | 500V | kW | 16 |
| | 690V | kW | 22 |
| Short-time allowable current for 10s (IEC/EN60947-1) | A | 96 | |
| Protection fuse | | | |
| | gG (IEC) | A | 20 |
| | aM (IEC) | A | 10 |
| Making capacity (RMS value) | A | 92 | |
| Breaking capacity at voltage | 440V | A | 72 |
| | 500V | A | 72 |
| | 690V | A | 72 |
| Resistance per pole (average value) | m? | 10 | |
| Power dissipation per pole (average value) | | | |
| | I_{th} | W | 4 |
| | AC3 | W | 0.81 |
| Tightening torque for terminals | min | Nm | 0.8 |
| | max | Nm | 1 |
| | min | lbin | 9 |
| | max | lbin | 9 |
| Tightening torque for coil terminal | min | Nm | 0.8 |

| | | | |
|-----------------------------------------------------|--------------------------|-----------------------|----------|
| | max | Nm | 1 |
| | min | lbin | 9 |
| | max | lbin | 9 |
| Max number of wires simultaneously connectable | Nr. 2 | | |
| Conductor section | | | |
| AWG/Kcmil | max | 12 | |
| Flexible w/o lug conductor section | min | mm ² | 0.8 |
| | max | mm ² | 2.5 |
| Flexible c/w lug conductor section | min | mm ² | 1.5 |
| | max | mm ² | 2.5 |
| Flexible with insulated spade lug conductor section | min | mm ² | 1.5 |
| | max | mm ² | 2.5 |
| Power terminal protection according to IEC/EN 60529 | IP00 | | |
| Mechanical features | | | |
| Operating position | normal allowable | Vertical plan ±30° | |
| Fixing | Screw / DIN rail 35mm | | |
| Weight | g | 240 | |
| Conductor section | | | |
| AWG/kcmil conductor section | max | 12 | |
| Auxiliary contact characteristics | | | |
| Thermal current Ith | A | 10 | |
| IEC/EN 60947-5-1 designation | A600 - Q600 | | |
| Operating current AC15 | 230V | A | 3 |
| | 400V | A | 1.9 |
| | 500V | A | 1.4 |
| Operating current DC12 | 110V | A | 2.9 |
| Operating current DC13 | 24V | A | 2.9 |
| | 48V | A | 1.4 |
| | 60V | A | 1.1 |
| | 125V | A | 0.3 |
| | 220V | A | 0.1 |
| | 600V | A | 0.6 |
| Operations | | | |
| Mechanical life | cycles | 20000000 | |
| Electrical life | cycles | 500000 | |
| Safety related data | | | |
| Performance level B10d according to EN/ISO 13489-1 | rated load | cycles | 500000 |
| | mechanical load | cycles | 20000000 |
| Mirror contacts according to IEC/EN 609474-4-1 | yes | | |
| EMC compatibility | yes | | |
| DC coil operating | | | |

| | | | |
|--------------------------------------------------|--|----------|------|
| DC rated control voltage | | V | 110 |
| DC operating voltage | | | |
| pick-up | | min | %Us |
| | | max | %Us |
| drop-out | | min | %Us |
| | | max | %Us |
| Average coil consumption ≤20°C | | in-rush | W |
| | | holding | W |
| Max cycles frequency | | | |
| Mechanical operation | | cycles/h | 3600 |
| Operating times | | | |
| Average time for Us control | | | |
| in AC | | | |
| Closing NO | | min | ms |
| | | max | ms |
| Opening NO | | min | ms |
| | | max | ms |
| Closing NC | | min | ms |
| | | max | ms |
| Opening NC | | min | ms |
| | | max | ms |
| in DC | | min | ms |
| Closing NO | | max | ms |
| | | min | ms |
| Opening NO | | max | ms |
| | | min | ms |
| Closing NC | | max | ms |
| | | min | ms |
| Opening NC | | max | ms |
| | | min | ms |
| UL technical data | | max | ms |
| Full-load current (FLA) for three-phase AC motor | | at 480V | A |
| | | at 600V | A |
| Yielded mechanical performance | | | |
| for single-phase AC motor | | 110/120V | HP |
| | | 230V | HP |
| for three-phase AC motor | | 200/208V | HP |
| | | 220/230V | HP |
| | | 460/480V | HP |
| | | 575/600V | HP |


General USE

| Contactor | AC current | A | 20 |
|------------------------------------------------------|------------|----|-------------|
| Contact rating of auxiliary contacts according to UL | | | A600 - Q600 |
| Ambient conditions | | | |
| Temperature | | | |
| Operating temperature | min | °C | -50 |
| | max | °C | +70 |
| Storage temperature | min | °C | -60 |
| | max | °C | +80 |
| Max altitude | | m | 3000 |
| Resistance & Protection | | | |
| Pollution degree | | | 3 |
| Dimensions | | | |

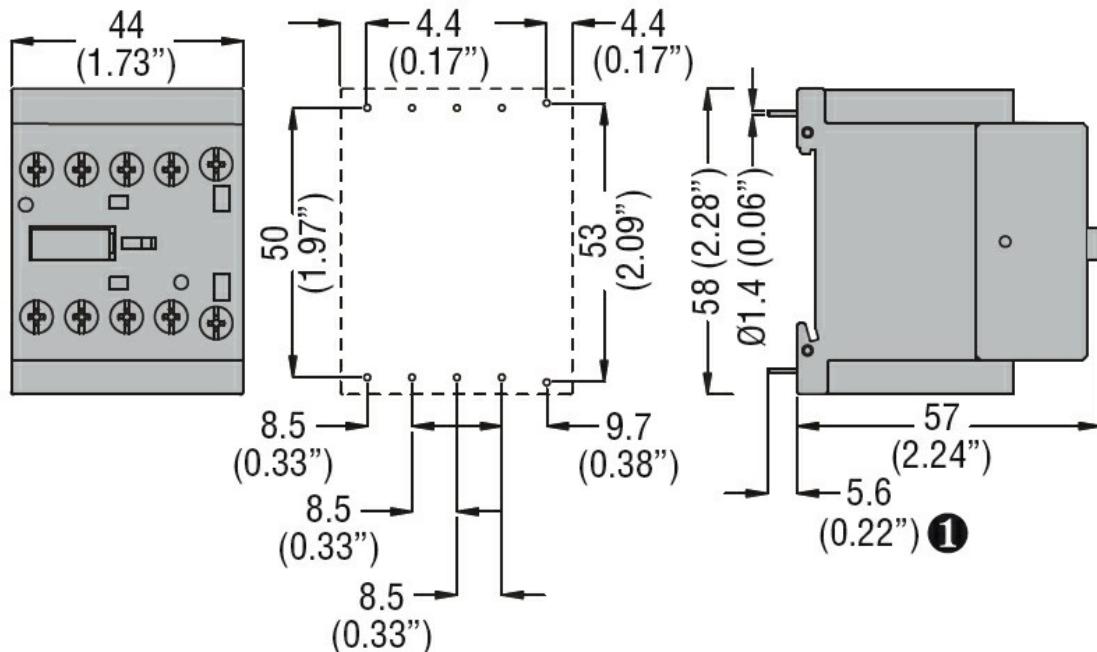

① Recommended PCB drillings 1.7-2mm.

Wiring diagrams

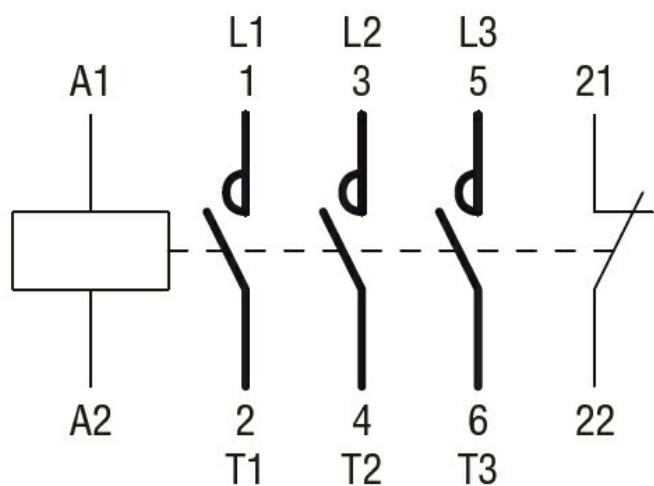

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1
CSA C22.2 n° 60947-4-1
IEC/EN 60947-1
IEC/EN 60947-4-1
UL 60947-1
UL 60947-4-1

Certificates

cURus
EAC

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching