



### Contact characteristics


#### Tightening torque for terminals

min	Ibin	9
max	Ibin	9


#### Tightening torque for coil terminal

min	Ibin	9
max	Ibin	9

### Dimensions

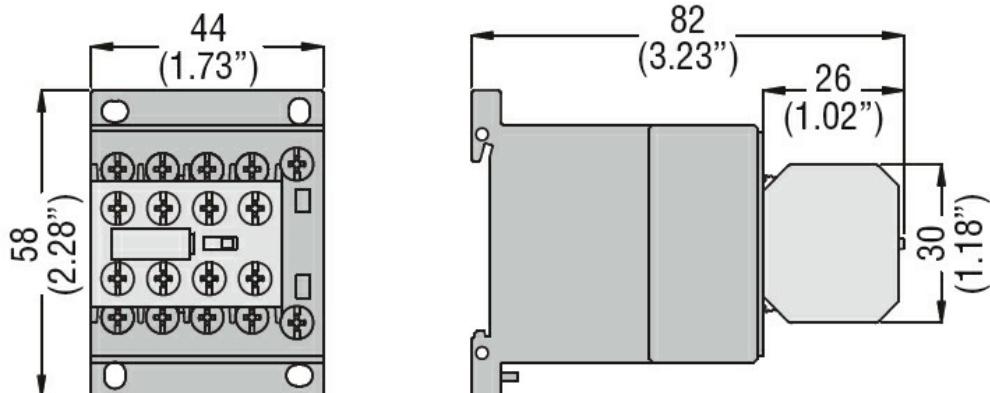

### Wiring diagrams

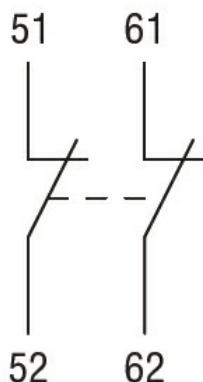

### Certifications and compliance

#### Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-5-1

IEC/EN 60947-1

IEC/EN 60947-5-1

UL 60947-1

UL 60947-5-1

### Certificates

CCC

cULus

EAC

**ETIM classification**

ETIM 8.0

EC000041 -  
Auxiliary contact  
block