



## Contact characteristics


## Tightening torque for terminals

min lbin 9  
max lbin 9


### Tightening torque for coil terminal

min lbin 9  
max lbin 9

## Dimensions

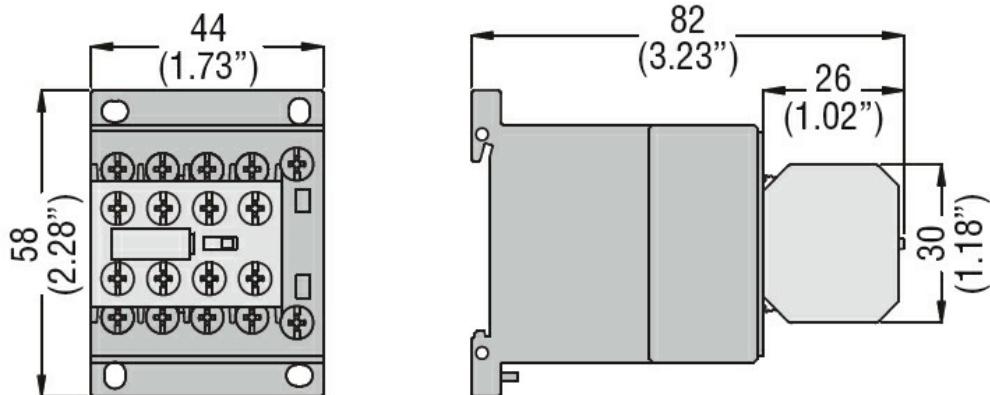

## Wiring diagrams

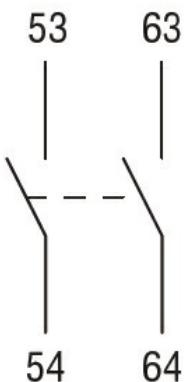

## Certifications and compliance

## Compliance

CSA C22.2 n° 60947-1  
CSA C22.2 n° 60947-5-1  
IEC/EN 60947-1  
IEC/EN 60947-5-1  
UL 60947-1  
UL 60947-5-1

---

## Certificates

CCC  
cULu  
FAC

**ETIM classification**

ETIM 8.0

EC000041 -  
Auxiliary contact  
block