




Product designation	Power contactor		
Product type designation	BF115		
Contact characteristics			
Number of poles	Nr.	3	
Rated insulation voltage U_i IEC/EN	V	1000	
Rated impulse withstand voltage U_{imp}	kV	8	
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current I_{th}	A	160	
Operational current I_e			
AC-1 ($\leq 40^\circ C$)	A	160	
AC-1 ($\leq 55^\circ C$)	A	130	
AC-1 ($\leq 70^\circ C$)	A	115	
AC-3 ($\leq 440V \leq 55^\circ C$)	A	115	
AC-4 (400V)	A	54	
Rated operational power AC-3 ($T \leq 55^\circ C$)	230V	kW	37
	400V	kW	55
	415V	kW	55
	440V	kW	55
	500V	kW	75
	690V	kW	110
	1000V	kW	55
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 1 poles in series	$\leq 24V$	A	160
	48V	A	160
	75V	A	120
	110V	A	10
	220V	A	—
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 2 poles in series	$\leq 24V$	A	160
	48V	A	160
	75V	A	160
	110V	A	130
	220V	A	14
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 3 poles in series	$\leq 24V$	A	160
	48V	A	160
	75V	A	160
	110V	A	140
	220V	A	145
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 4 poles in series	$\leq 24V$	A	160
	48V	A	160


	75V	A	160
	110V	A	160
	220V	A	160
IEC max current le in DC3-DC5 with L/R ≤ 15ms with 1 poles in series			
	≤24V	A	160
	48V	A	50
	75V	A	40
	110V	A	6
	220V	A	—
IEC max current le in DC3-DC5 with L/R ≤ 15ms with 2 poles in series			
	≤24V	A	160
	48V	A	72
	75V	A	65
	110V	A	65
	220V	A	7
IEC max current le in DC3-DC5 with L/R ≤ 15ms with 3 poles in series			
	≤24V	A	160
	48V	A	150
	75V	A	100
	110V	A	100
	220V	A	92
IEC max current le in DC3-DC5 with L/R ≤ 15ms with 4 poles in series			
	≤24V	A	160
	48V	A	120
	75V	A	120
	110V	A	125
	220V	A	115
Short-time allowable current for 10s (IEC/EN60947-1)			A 920
Protection fuse			
	gG (IEC)	A	200
	aM (IEC)	A	125
Making capacity (RMS value)			A 1500
Breaking capacity at voltage			
	440V	A	1200
	500V	A	850
	690V	A	905
Resistance per pole (average value)			m? 0.45
Power dissipation per pole (average value)			
	I _{th}	W	11.5
	AC3	W	6.0
Tightening torque for terminals			
	min	Nm	6
	max	Nm	7
	min	lbin	4.4
	max	lbin	5.2
Tightening torque for coil terminal			
	min	Nm	0.8
	max	Nm	1
	min	lbin	0.59
	max	lbin	0.74
Conductor section			
	AWG/Kcmil		
		max	2/0

Flexible w/o lug conductor section	min	mm ²	1.5
	max	mm ²	70
Flexible c/w lug conductor section	min	mm ²	1.5
	max	mm ²	70
Power terminal protection according to IEC/EN 60529			IP20 front
Mechanical features			
Operating position	normal allowable		Vertical plan ±30°
Fixing			Screw / DIN rail 35mm
Weight	g		2060
Conductor section			
AWG/kcmil conductor section	max		2/0
Operations			
Mechanical life	cycles		15000000
Electrical life	cycles		1200000
AC coil operating			
Rated AC voltage at 50/60Hz, 60Hz	min max	V	60 110
Rated AC voltage at 50/60Hz		V	110
AC operating voltage			
of 50/60Hz coil powered at 50Hz			
pick-up	min max	%Us	80 110
drop-out	max	%Us	≤70 Us min
of 50/60Hz coil powered at 60Hz			
pick-up	min max	%Us	80 Us min 110 Us max
drop-out	max	%Us	≤70 Us min
AC average coil consumption at 20°C			
of 50/60Hz coil powered at 50Hz	in-rush holding	VA	70...175 1.7...3.5
of 50/60Hz coil powered at 60Hz	in-rush holding	VA	70...175 1.7...3.5
of 60Hz coil powered at 60Hz	in-rush holding	VA	70...175 1.7...3.5
Dissipation at holding ≤20°C 50Hz		W	1.3...1,5
DC coil operating			
DC rated control voltage	min max	V	60 110

DC rated control voltage		V	110
DC operating voltage			
pick-up	min	%Us	80 Us min
	max	%Us	110 Us max
drop-out	max	%Us	≤70 Us min
Average coil consumption ≤20°C	in-rush	W	70...80
	holding	W	1.3...1.5
Max cycles frequency			
Mechanical operation		cycles/h	1500
Operating times			
Average time for Us control			
in AC			
Closing NO	min	ms	45
	max	ms	90
Opening NO	min	ms	24
	max	ms	60
UL technical data			
Yielded mechanical performance			
for three-phase AC motor			
	200/208V	HP	40
	220/230V	HP	40
	460/480V	HP	75
	575/600V	HP	100
General USE			
Contactor	AC current	A	165
Short-circuit protection fuse, 600V			
High fault	Short circuit current	kA	100
	Fuse rating	A	200
	Fuse class	J	
Standard fault	Short circuit current	kA	10
	Fuse rating	A	250
	Fuse class	RK5	
Ambient conditions			
Temperature			
Operating temperature	min	°C	-50
	max	°C	70
Storage temperature	min	°C	-60
	max	°C	+80
Max altitude		m	3000
Dimensions			

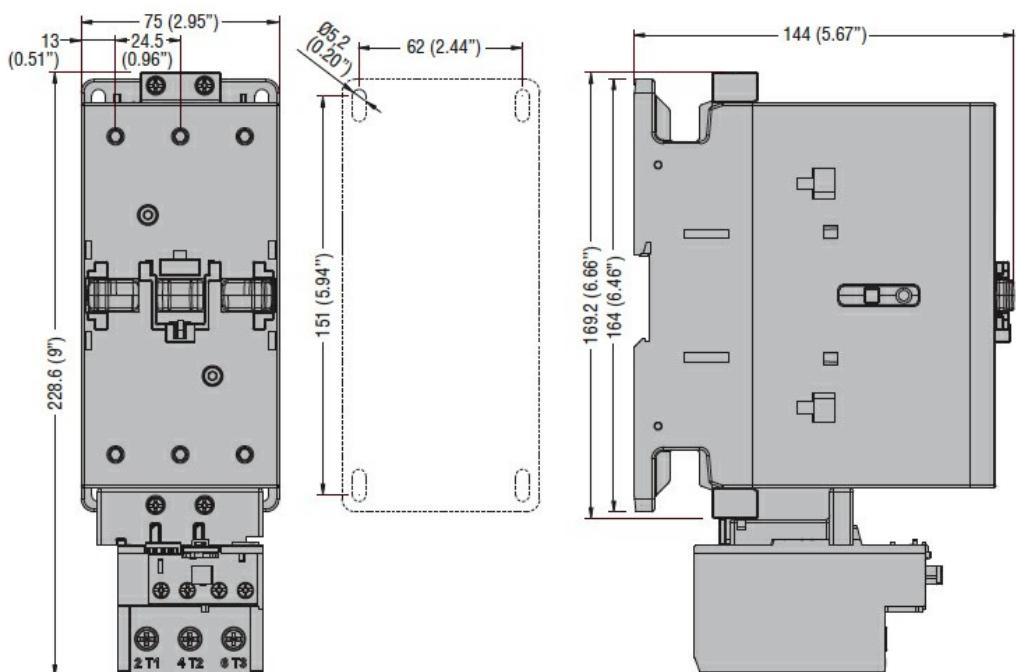

Wiring diagrams

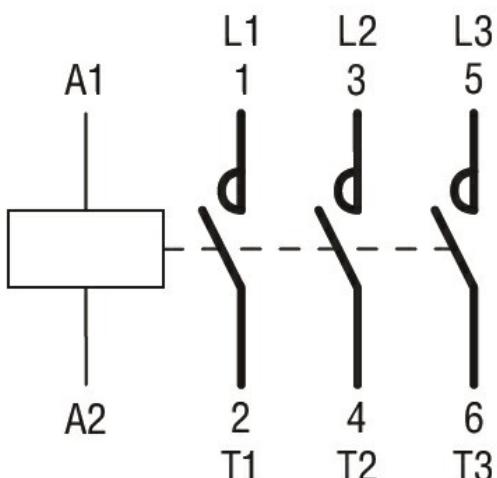

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

360 - BF11500E024

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching