



|  |   |      |     |
|--|---|------|-----|
| Product designation  | Power contactor                                     |      |     |
| Product type designation   | BF115   |      |     |
| <b>Contact characteristics</b>   |   |      |     |
| Number of poles  | Nr.   | 4    |     |
| Rated insulation voltage U <sub>i</sub> IEC/EN   | V   | 1000 |     |
| Rated impulse withstand voltage U <sub>imp</sub>   | kV  | 8    |     |
| Operational frequency  | min   | Hz   | 25  |
|  | max   | Hz   | 400 |
| IEC Conventional free air thermal current I <sub>th</sub>                                    |   | A    | 160 |
| Operational current I <sub>e</sub>   |   |      |     |
|  | AC-1 ( $\leq 40^{\circ}\text{C}$ )                  | A    | 160 |
|  | AC-1 ( $\leq 55^{\circ}\text{C}$ )                  | A    | 130 |
|  | AC-1 ( $\leq 70^{\circ}\text{C}$ )                  | A    | 115 |
|  | AC-3 ( $\leq 440\text{V} \leq 55^{\circ}\text{C}$ ) | A    | 115 |
|  | AC-4 (400V)   | A    | 54  |
| IEC max current I <sub>e</sub> in DC1 with L/R $\leq 1\text{ms}$ with 1 poles in series      |   |      |     |
|  | $\leq 24\text{V}$                                   | A    | 160 |
|  | 48V   | A    | 160 |
|  | 75V   | A    | 120 |
|  | 110V  | A    | 10  |
|  | 220V  | A    | —   |
| IEC max current I <sub>e</sub> in DC1 with L/R $\leq 1\text{ms}$ with 2 poles in series      |   |      |     |
|  | $\leq 24\text{V}$                                   | A    | 160 |
|  | 48V   | A    | 160 |
|  | 75V   | A    | 160 |
|  | 110V  | A    | 130 |
|  | 220V  | A    | 14  |
| IEC max current I <sub>e</sub> in DC1 with L/R $\leq 1\text{ms}$ with 3 poles in series      |   |      |     |
|  | $\leq 24\text{V}$                                   | A    | 160 |
|  | 48V   | A    | 160 |
|  | 75V   | A    | 160 |
|  | 110V  | A    | 140 |
|  | 220V  | A    | 145 |
| IEC max current I <sub>e</sub> in DC1 with L/R $\leq 1\text{ms}$ with 4 poles in series      |   |      |     |
|  | $\leq 24\text{V}$                                   | A    | 160 |
|  | 48V   | A    | 160 |
|  | 75V   | A    | 160 |
|  | 110V  | A    | 160 |
|  | 220V  | A    | 160 |
| IEC max current I <sub>e</sub> in DC3-DC5 with L/R $\leq 15\text{ms}$ with 1 poles in series |   |      |     |
|  | $\leq 24\text{V}$                                   | A    | 160 |
|  | 48V   | A    | 50  |
|  | 75V   | A    | 40  |
|  | 110V  | A    | 6   |

|   | 220V  | A                                  | –                               |
|---|---|------------------------------------|---------------------------------|
| IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 2 poles in series | $\leq 24\text{V}$<br>48V<br>75V<br>110V<br>220V | A<br>A<br>A<br>A<br>A              | 160<br>72<br>65<br>65<br>7      |
| IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 3 poles in series | $\leq 24\text{V}$<br>48V<br>75V<br>110V<br>220V | A<br>A<br>A<br>A<br>A              | 160<br>150<br>100<br>100<br>92  |
| IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 4 poles in series | $\leq 24\text{V}$<br>48V<br>75V<br>110V<br>220V | A<br>A<br>A<br>A<br>A              | 160<br>120<br>120<br>125<br>115 |
| Short-time allowable current for 10s (IEC/EN60947-1)                                |   | A                                  | 920                             |
| Protection fuse   | gG (IEC)<br>aM (IEC)                            | A<br>A                             | 200<br>125                      |
| Making capacity (RMS value)   |   | A                                  | 1500                            |
| Breaking capacity at voltage  | 440V<br>500V<br>690V                            | A<br>A<br>A                        | 1200<br>850<br>905              |
| Resistance per pole (average value)   |   | m?                                 | 0.45                            |
| Power dissipation per pole (average value)  | I <sub>th</sub><br>AC3                          | W<br>W                             | 11.5<br>6.0                     |
| Tightening torque for terminals   | min<br>max<br>min<br>max                        | Nm<br>Nm<br>lbin<br>lbin           | 6<br>7<br>4.4<br>5.2            |
| Tightening torque for coil terminal   | min<br>max<br>min<br>max                        | Nm<br>Nm<br>lbin<br>lbin           | 0.8<br>1<br>0.59<br>0.74        |
| Conductor section   | AWG/Kcmil                                       | max                                | 2/0                             |
| Flexible w/o lug conductor section  | min<br>max                                      | mm <sup>2</sup><br>mm <sup>2</sup> | 1.5<br>70                       |
| Flexible c/w lug conductor section  | min<br>max                                      | mm <sup>2</sup><br>mm <sup>2</sup> | 1.5<br>70                       |
| Power terminal protection according to IEC/EN 60529                                 |   |                                    | IP20 front                      |
| Mechanical features   |   |                                    |                                 |

Operating position

|  | normal<br>allowable | Vertical plan<br>±30° |
|--|---------------------|-----------------------|
|--|---------------------|-----------------------|

Fixing

Weight

Conductor section

AWG/kcmil conductor section

max 2/0

Operations

Mechanical life

cycles 15000000

Electrical life

cycles 1200000

AC coil operating

Rated AC voltage at 50/60Hz

V 24

AC operating voltage

of 50/60Hz coil powered at 50Hz  
pick-up

min %Us 80  
max %Us 110

drop-out

min %Us 20  
max %Us 55

of 50/60Hz coil powered at 60Hz  
pick-up

min %Us 85  
max %Us 110

drop-out

min %Us 40  
max %Us 55

AC average coil consumption at 20°C

of 50/60Hz coil powered at 50Hz

in-rush VA 300  
holding VA 20

of 50/60Hz coil powered at 60Hz

in-rush VA 275  
holding VA 17

of 60Hz coil powered at 60Hz

in-rush VA 300  
holding VA 20

Max cycles frequency

Mechanical operation

cycles/h 1500

Operating times

Average time for Us control

in AC

Closing NO

min ms 16  
max ms 32

Opening NO

min ms 9  
max ms 24

UL technical data

General USE

Contactor

AC current A 165

Short-circuit protection fuse, 600V  
High fault

|                |  |                |                  |
|----------------|--|----------------|------------------|
| Standard fault | Short circuit current<br>Fuse rating<br>Fuse class | kA<br>A<br>J   | 100<br>200<br>J  |
|                | Short circuit current<br>Fuse rating<br>Fuse class | kA<br>A<br>RK5 | 10<br>250<br>RK5 |

### Ambient conditions


Temperature

|                       |            |          |            |
|-----------------------|------------|----------|------------|
| Operating temperature | min<br>max | °C<br>°C | -50<br>70  |
| Storage temperature   | min<br>max | °C<br>°C | -60<br>+80 |


Max altitude

m 3000

### Dimensions

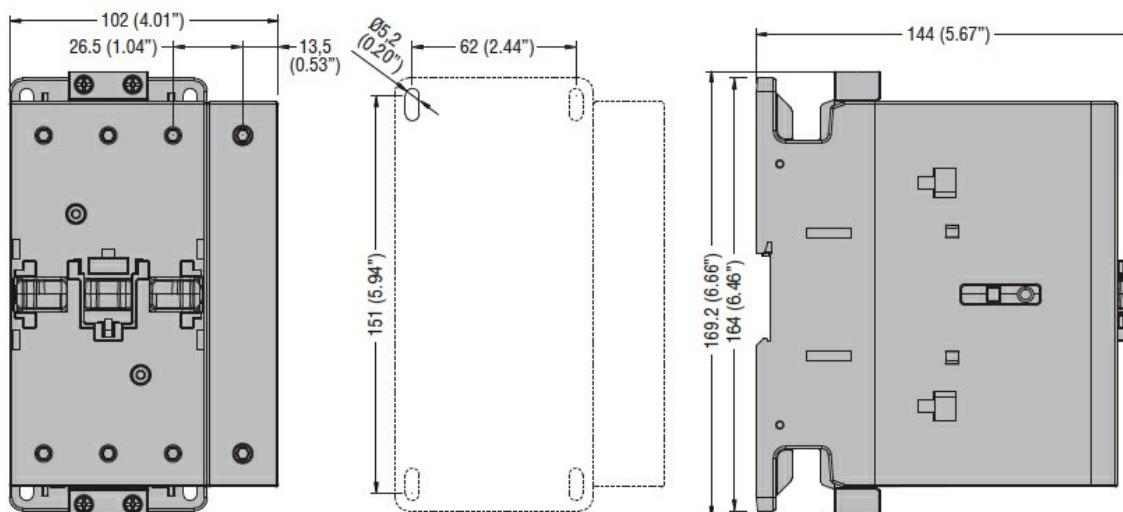

### Wiring diagrams

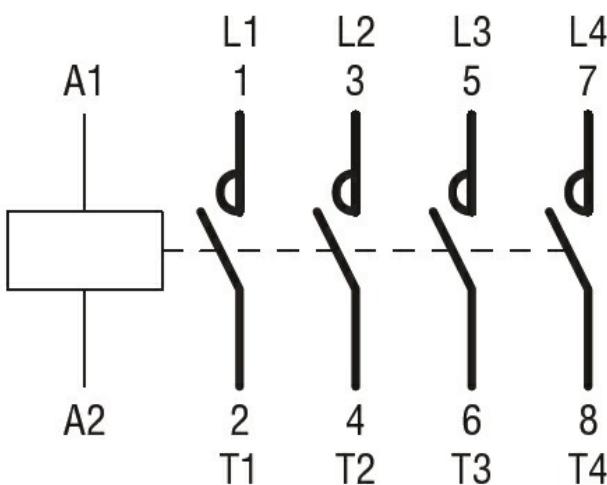

### Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

---

CSA C22.2 n° 60947-4-1

---

IEC/EN 60947-1

---

IEC/EN 60947-4-1

---

UL 60947-1

---

UL 60947-4-1

---

**Certificates**

---

CCC

---

cULus

---

EAC

---

**ETIM classification**

ETIM 8.0

EC000066 -  
Power contactor,  
AC switching