



Product designation

Power contactor

Product type designation

BF150

Contact characteristics

Number of poles	Nr.	3
Rated insulation voltage U_i IEC/EN	V	1000
Rated impulse withstand voltage U_{imp}	kV	8
Operational frequency	min Hz	25
	max Hz	400
IEC Conventional free air thermal current I_{th}	A	165
Operational current I_e	AC-1 (=40°C)	A 165
	AC-1 (=55°C)	A 135
	AC-1 (=70°C)	A 118
	AC-3 (=440V =55°C)	A 150
	AC-4 (400V)	A 70
Rated operational power AC-3 (T=55°C)	230V kW	45
	400V kW	75
	415V kW	75
	440V kW	75
	500V kW	90
	690V kW	110
	1000V kW	55
IEC max current I_e in DC1 with L/R = 1ms with 1 poles in series	=24V A	165
	48V A	165
	75V A	150
	110V A	10
	220V A	–
IEC max current I_e in DC1 with L/R = 1ms with 2 poles in series	=24V A	165
	48V A	165
	75V A	165
	110V A	150
	220V A	14
IEC max current I_e in DC1 with L/R = 1ms with 3 poles in series	=24V A	165
	48V A	165
	75V A	165
	110V A	160
	220V A	150
IEC max current I_e in DC1 with L/R = 1ms with 4 poles in series	=24V A	165
	48V A	165

	75V	A	165
	110V	A	165
	220V	A	165
IEC max current Ie in DC3-DC5 with L/R = 15ms with 1 poles in series			
	=24V	A	165
	48V	A	60
	75V	A	44
	110V	A	6
	220V	A	–
IEC max current Ie in DC3-DC5 with L/R = 15ms with 2 poles in series			
	=24V	A	165
	48V	A	82
	75V	A	70
	110V	A	80
	220V	A	7
IEC max current Ie in DC3-DC5 with L/R = 15ms with 3 poles in series			
	=24V	A	165
	48V	A	195
	75V	A	110
	110V	A	120
	220V	A	120
IEC max current Ie in DC3-DC5 with L/R = 15ms with 4 poles in series			
	=24V	A	165
	48V	A	130
	75V	A	130
	110V	A	150
	220V	A	150
Short-time allowable current for 10s (IEC/EN60947-1)		A	1200
Protection fuse			
	gG (IEC)	A	250
	aM (IEC)	A	160
Making capacity (RMS value)		A	1500
Breaking capacity at voltage			
	440V	A	1200
	500V	A	1025
	690V	A	905
Resistance per pole (average value)		m?	0.45
Power dissipation per pole (average value)			
	Ith	W	12
	AC3	W	10.1
Tightening torque for terminals			
	min	Nm	6
	max	Nm	7
	min	lbin	4.4
	max	lbin	5.2
Tightening torque for coil terminal			
	min	Nm	0.8
	max	Nm	1
	min	lbin	0.59
	max	lbin	0.74
Conductor section			
	AWG/Kcmil		
	max		2/0

Flexible w/o lug conductor section			
	min	mm ²	1.5
	max	mm ²	70
Flexible c/w lug conductor section			
	min	mm ²	1.5
	max	mm ²	70
Power terminal protection according to IEC/EN 60529			IP20 front
Mechanical features			
Operating position		normal allowable	Vertical plan ±30°
Fixing			Screw / DIN rail 35mm
Weight		g	2020
Conductor section			
AWG/kcmil conductor section		max	2/0
Operations			
Mechanical life		cycles	15000000
Electrical life		cycles	800000
Safety related data			
EMC compatibility			yes
AC coil operating			
Rated AC voltage at 60Hz		V	120
AC operating voltage			
of 60Hz coil powered at 60Hz			
pick-up		min	%Us 80
		max	%Us 110
drop-out		min	%Us 20
		max	%Us 55
AC average coil consumption at 20°C			
of 60Hz coil powered at 60Hz		in-rush holding	VA 300
			VA 20
Dissipation at holding =20°C 50Hz			W 6.5
Max cycles frequency			
Mechanical operation			cycles/h 1500
Operating times			
Average time for Us control in AC			
Closing NO		min	ms 45
		max	ms 32
Opening NO		min	ms 9
		max	ms 24
UL technical data			
Yielded mechanical performance			
for three-phase AC motor		200/208V	HP 50
		220/230V	HP 50
		460/480V	HP 100

		575/600V	HP	125
General USE				
Contactor				
		AC current	A	165
Short-circuit protection fuse, 600V				
High fault		Short circuit current	kA	100
		Fuse rating	A	200
		Fuse class	J	
Standard fault		Short circuit current	kA	10
		Fuse rating	A	250
		Fuse class	RK5	
Max altitude		m	3000	

Ambient conditions

Temperature


Operating temperature

min	°C	-50
max	°C	70


Storage temperature

min	°C	-60
max	°C	80

Dimensions

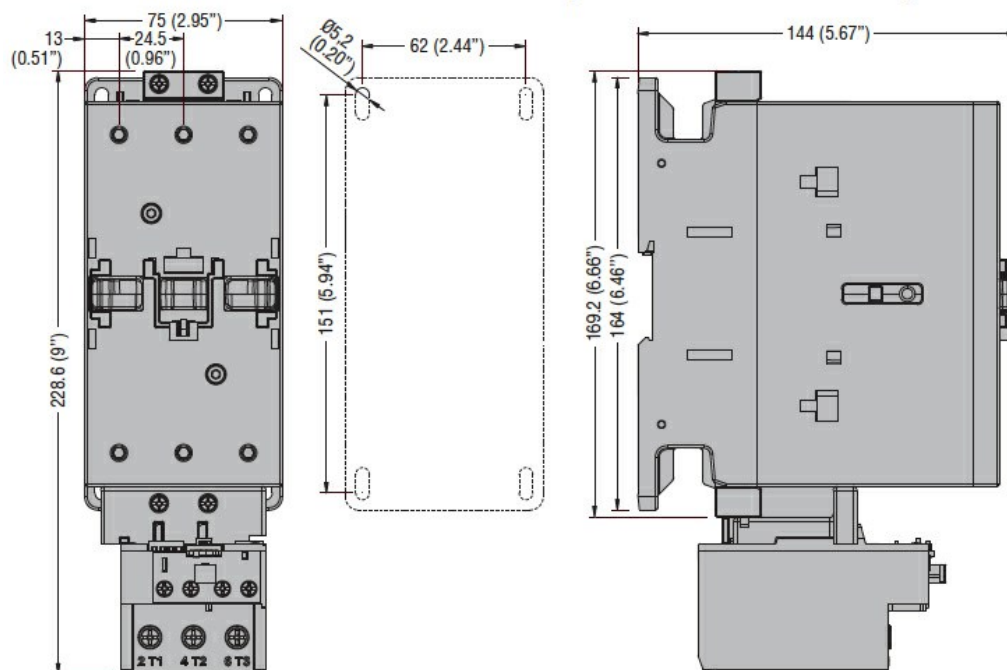

Wiring diagrams

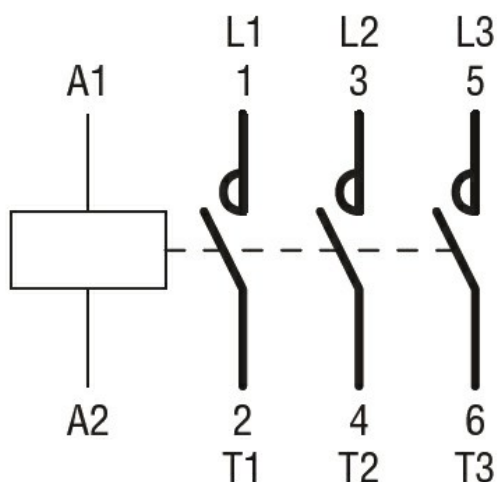

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

cULus

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching