



Product designation	Power contactor		
Product type designation	BF150		
Contact characteristics			
Number of poles	Nr.	4	
Rated insulation voltage U _i IEC/EN	V	1000	
Rated impulse withstand voltage U _{imp}	kV	8	
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current I _{th}		A	165
Operational current I _e			
	AC-1 ($\leq 40^{\circ}\text{C}$)	A	165
	AC-1 ($\leq 55^{\circ}\text{C}$)	A	135
	AC-1 ($\leq 70^{\circ}\text{C}$)	A	118
	AC-3 ($\leq 440\text{V} \leq 55^{\circ}\text{C}$)	A	150
	AC-4 (400V)	A	70
IEC max current I _e in DC1 with L/R $\leq 1\text{ms}$ with 1 poles in series			
	$\leq 24\text{V}$	A	165
	48V	A	165
	75V	A	150
	110V	A	10
	220V	A	—
IEC max current I _e in DC1 with L/R $\leq 1\text{ms}$ with 2 poles in series			
	$\leq 24\text{V}$	A	165
	48V	A	165
	75V	A	165
	110V	A	150
	220V	A	14
IEC max current I _e in DC1 with L/R $\leq 1\text{ms}$ with 3 poles in series			
	$\leq 24\text{V}$	A	165
	48V	A	165
	75V	A	165
	110V	A	160
	220V	A	150
IEC max current I _e in DC1 with L/R $\leq 1\text{ms}$ with 4 poles in series			
	$\leq 24\text{V}$	A	165
	48V	A	165
	75V	A	165
	110V	A	165
	220V	A	165
IEC max current I _e in DC3-DC5 with L/R $\leq 15\text{ms}$ with 1 poles in series			
	$\leq 24\text{V}$	A	165
	48V	A	60
	75V	A	44
	110V	A	6

	220V	A	—
IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 2 poles in series	$\leq 24V$ 48V 75V 110V 220V	A	165 82 70 80 7
IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 3 poles in series	$\leq 24V$ 48V 75V 110V 220V	A	165 195 110 120 120
IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 4 poles in series	$\leq 24V$ 48V 75V 110V 220V	A	165 130 130 150 150
Short-time allowable current for 10s (IEC/EN60947-1)		A	1200
Protection fuse	gG (IEC) aM (IEC)	A	250 160
Making capacity (RMS value)		A	1500
Breaking capacity at voltage	440V 500V 690V	A	1200 1025 905
Resistance per pole (average value)		m?	0.45
Power dissipation per pole (average value)	I _{th} AC3	W	12 10.1
Tightening torque for terminals	min max min max	Nm Nm lbin lbin	6 7 4.4 5.2
Tightening torque for coil terminal	min max min max	Nm Nm lbin lbin	0.8 1 0.59 0.74
Conductor section			
AWG/Kcmil		max	2/0
Flexible w/o lug conductor section	min max	mm ²	1.5 70
Flexible c/w lug conductor section	min max	mm ²	1.5 70
Power terminal protection according to IEC/EN 60529			IP20 front
Mechanical features			

Operating position

	normal allowable	Vertical plan ±30°
--	---------------------	-----------------------

Fixing		Screw / DIN rail 35mm
--------	--	--------------------------

Weight	g	2420
--------	---	------

Conductor section

AWG/kcmil conductor section	max	2/0
-----------------------------	-----	-----

Operations		
------------	--	--

Mechanical life	cycles	15000000
-----------------	--------	----------

Electrical life	cycles	800000
-----------------	--------	--------

Safety related data		
---------------------	--	--

EMC compatibility		yes
-------------------	--	-----

AC coil operating		
-------------------	--	--

Rated AC voltage at 60Hz	V	24
--------------------------	---	----

AC operating voltage		
----------------------	--	--

of 60Hz coil powered at 60Hz		
pick-up	min	%Us 80
	max	%Us 110
drop-out	min	%Us 20
	max	%Us 55

AC average coil consumption at 20°C		
of 60Hz coil powered at 60Hz	in-rush	VA 300

	holding	VA 20
Dissipation at holding ≤20°C 50Hz		W 6.5

Max cycles frequency		
----------------------	--	--

Mechanical operation		cycles/h 1500
----------------------	--	---------------

Operating times		
-----------------	--	--

Average time for Us control		
in AC		

Closing NO	min	ms 45
	max	ms 32
Opening NO	min	ms 9
	max	ms 24

UL technical data		
-------------------	--	--

General USE		
-------------	--	--

Contactor	AC current	A 165
-----------	------------	-------

Short-circuit protection fuse, 600V	Short circuit current	kA 100
High fault	Fuse rating	A 200
	Fuse class	J

Standard fault	Short circuit current	kA 10
	Fuse rating	A 250
	Fuse class	RK5

Ambient conditions		
--------------------	--	--

Temperature

Operating temperature

	min	°C	-50
	max	°C	70


Storage temperature

	min	°C	-60
	max	°C	80


Max altitude

m 3000

Dimensions

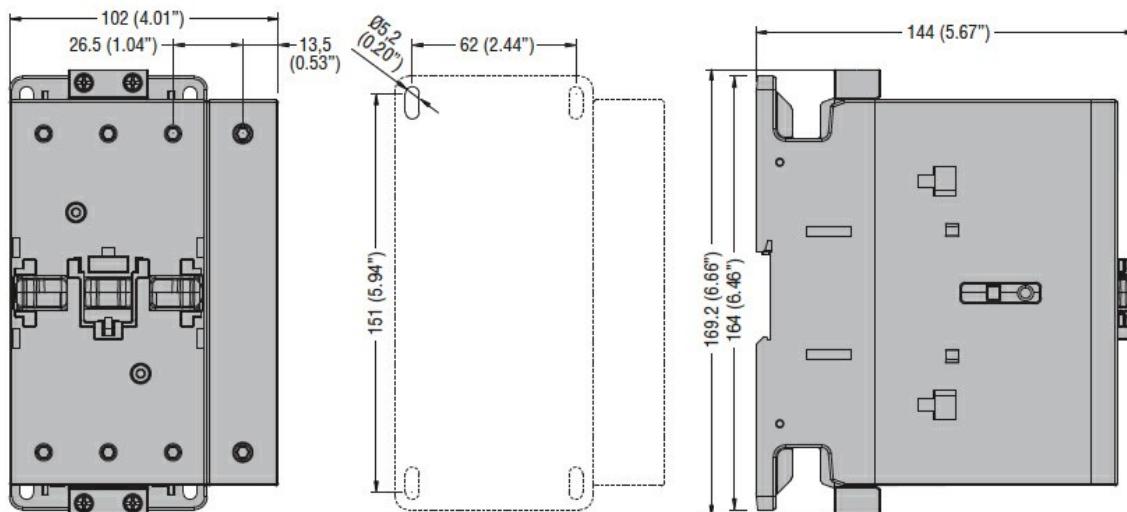

Wiring diagrams

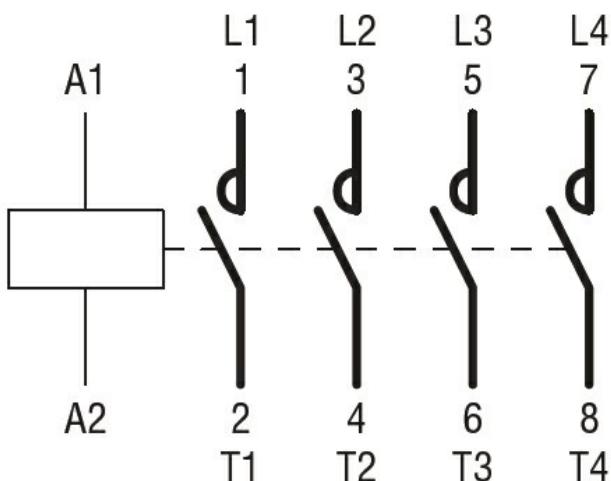

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching