




| | | | |
|--|-----------------|------|-----|
| Product designation | Power contactor | | |
| Product type designation | BF38 | | |
| Contact characteristics | | | |
| Number of poles | Nr. | 4 | |
| Rated insulation voltage Ui IEC/EN | V | 690 | |
| Rated impulse withstand voltage $Uimp$ | kV | 6 | |
| Operational frequency | min | Hz | 25 |
| | max | Hz | 400 |
| IEC Conventional free air thermal current Ith | A | 56 | |
| Operational current Ie | | | |
| AC-1 ($\leq 40^\circ C$) | A | 56 | |
| AC-1 ($\leq 40^\circ C$) with 16mm ² wire and fork end lugA | A | 60 | |
| AC-1 ($\leq 55^\circ C$) | A | 45 | |
| AC-1 ($\leq 55^\circ C$) with 16mm ² wire and fork end lugA | A | 48 | |
| AC-1 ($\leq 70^\circ C$) | A | 40 | |
| AC-1 ($\leq 70^\circ C$) with 16mm ² wire and fork end lugA | A | 42 | |
| AC-3 ($\leq 440V \leq 55^\circ C$) | A | 38 | |
| AC-4 (400V) | A | 15.5 | |
| Rated operational power AC-1 ($T \leq 40^\circ C$) | 230V | kW | 21 |
| | 400V | kW | 36 |
| | 500V | kW | 45 |
| | 690V | kW | 62 |
| Short-time allowable current for 10s (IEC/EN60947-1) | A | 320 | |
| Protection fuse | | | |
| gG (IEC) | A | 63 | |
| aM (IEC) | A | 40 | |
| Making capacity (RMS value) | A | 380 | |
| Breaking capacity at voltage | | | |
| 440V | A | 304 | |
| 500V | A | 240 | |
| 690V | A | 192 | |
| Resistance per pole (average value) | m? | | |
| Power dissipation per pole (average value) | Ith | W | 6 |
| | AC3 | W | 2.9 |
| Tightening torque for terminals | min | Nm | 2.5 |
| | max | Nm | 3 |
| | min | lbin | 1.8 |
| | max | lbin | 2.2 |
| Tightening torque for coil terminal | min | Nm | 0.8 |
| | max | Nm | 1 |

| | | | | | | |
|---|-----------------------------|-----------------|-----------------|----------|--|--|
| | | min | lb/in | 0.8 | | |
| | | max | lb/in | 0.74 | | |
| Max number of wires simultaneously connectable | Nr. 2 | | | | | |
| Conductor section | AWG/Kcmil | | | | | |
| | | max | | 6 | | |
| Flexible w/o lug conductor section | | min | mm ² | 2.5 | | |
| | | max | mm ² | 16 | | |
| Flexible c/w lug conductor section | | min | mm ² | 1 | | |
| | | max | mm ² | 10 | | |
| Flexible with insulated spade lug conductor section | | min | mm ² | 1 | | |
| | | max | mm ² | 10 | | |
| Power terminal protection according to IEC/EN 60529 | IP20 when wired | | | | | |
| Mechanical features | | | | | | |
| Operating position | | normal | Vertical plan | | | |
| | | allowable | ±30° | | | |
| Fixing | Screw / DIN rail 35mm | | | | | |
| Weight | | g | 510 | | | |
| Conductor section | AWG/kcmil conductor section | | | | | |
| | | max | 6 | | | |
| Operations | | | | | | |
| Mechanical life | | cycles | 20000000 | | | |
| Electrical life | | cycles | 1400000 | | | |
| Safety related data | | | | | | |
| Performance level B10d according to EN/ISO 13489-1 | | rated load | cycles | 1400000 | | |
| | | mechanical load | cycles | 20000000 | | |
| Mirror contacts according to IEC/EN 609474-4-1 | YES | | | | | |
| EMC compatibility | yes | | | | | |
| AC coil operating | | | | | | |
| Rated AC voltage at 50/60Hz | | V | 230 | | | |
| AC operating voltage | | | | | | |
| of 50/60Hz coil powered at 50Hz | | | | | | |
| pick-up | | min | %Us | 80 | | |
| | | max | %Us | 110 | | |
| drop-out | | min | %Us | 20 | | |
| | | max | %Us | 55 | | |
| of 50/60Hz coil powered at 60Hz | | | | | | |
| pick-up | | min | %Us | 85 | | |
| | | max | %Us | 110 | | |
| drop-out | | min | %Us | 20 | | |
| | | max | %Us | 55 | | |
| AC average coil consumption at 20°C | | | | | | |


FOUR-POLE CONTACTOR, IEC OPERATING CURRENT ITH (AC1) = 56A, AC COIL 50/60HZ, 230VAC, 2NO AND 2NC

| | | | |
|---|---------------------|-----------------------|----------------------------|
| of 50/60Hz coil powered at 50Hz | in-rush | VA | 75 |
| | holding | VA | 9 |
| of 50/60Hz coil powered at 60Hz | in-rush | VA | 70 |
| | holding | VA | 6.5 |
| of 60Hz coil powered at 60Hz | in-rush | VA | 75 |
| | holding | VA | 9 |
| Dissipation at holding $\leq 20^{\circ}\text{C}$ 50Hz | | W | 2.5 |
| Max cycles frequency | | | |
| Mechanical operation | | cycles/h | 3600 |
| Operating times | | | |
| Average time for Us control in AC | | | |
| | Closing NO | | |
| | | min | ms 8 |
| | | max | ms 24 |
| | Opening NO | | |
| | | min | ms 5 |
| | | max | ms 15 |
| | Closing NC | | |
| | | min | ms 11 |
| | | max | ms 29 |
| | Opening NC | | |
| | | min | ms 6 |
| | | max | ms 14 |
| UL technical data | | | |
| Full-load current (FLA) for three-phase AC motor | | at 480V | A 40 |
| | | at 600V | A 32 |
| Yielded mechanical performance | | | |
| for single-phase AC motor | | 110/120V | HP 3 |
| | | 230V | HP 7.5 |
| for three-phase AC motor | | 200/208V | HP 10 |
| | | 220/230V | HP 15 |
| | | 460/480V | HP 30 |
| | | 575/600V | HP 30 |
| General USE | | | |
| Contactor | | AC current | A 55 |
| Ambient conditions | | | |
| Temperature | | Operating temperature | |
| | | | min $^{\circ}\text{C}$ -50 |
| | | | max $^{\circ}\text{C}$ 70 |
| | Storage temperature | | |
| | | | min $^{\circ}\text{C}$ -60 |
| | | | max $^{\circ}\text{C}$ 80 |
| Max altitude | | | m 3000 |
| Resistance & Protection | | | |
| Pollution degree | | | 3 |

Dimensions

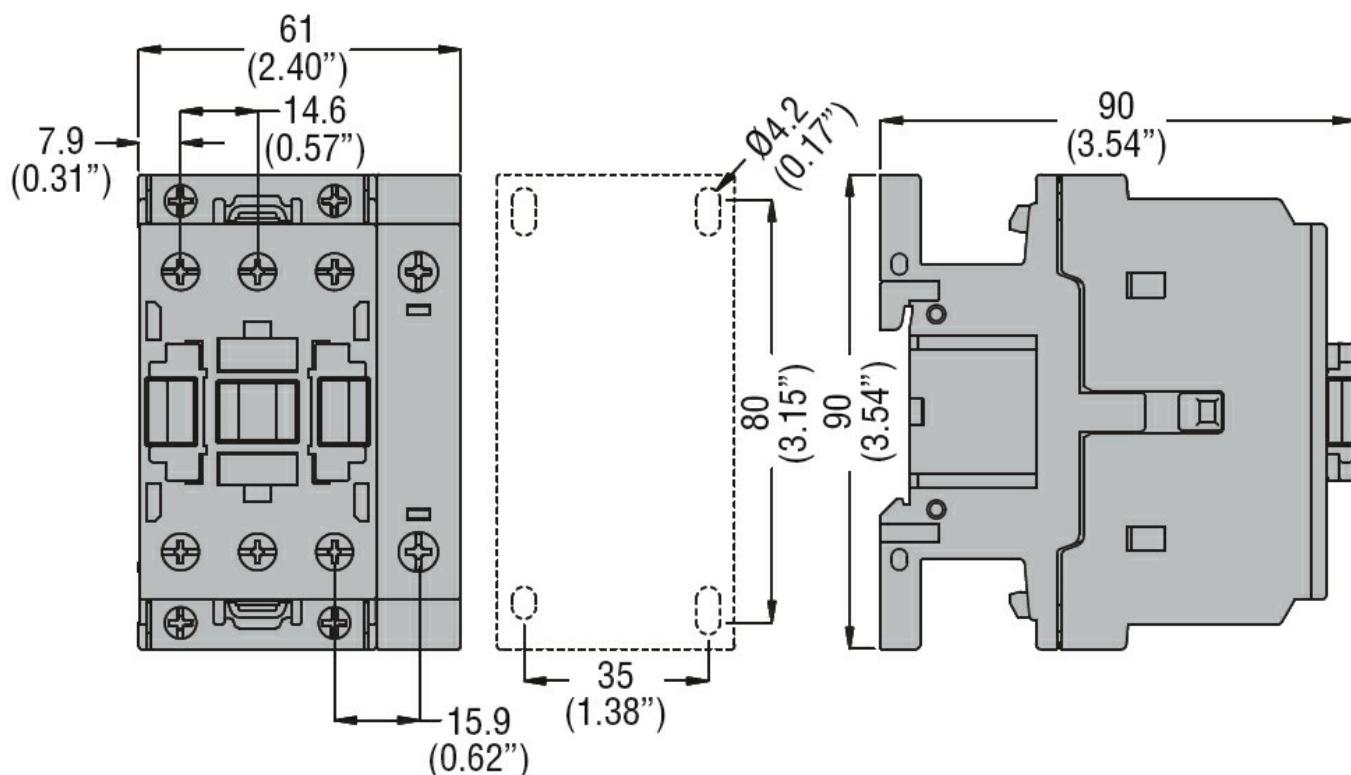

Wiring diagrams

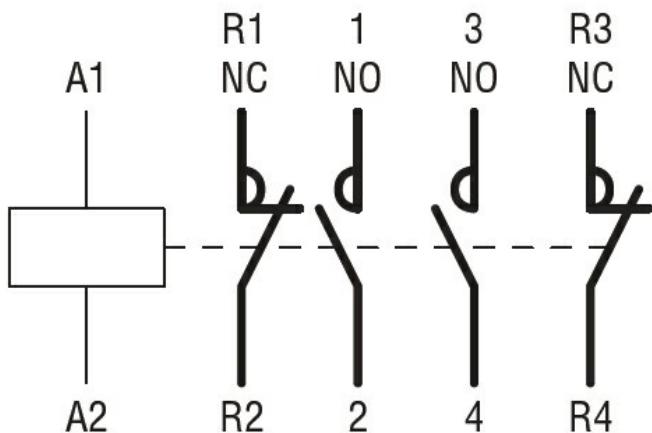

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching