




Product designation	Power contactor		
Product type designation	BF40		
Contact characteristics			
Number of poles	Nr.	3	
Rated insulation voltage U_i IEC/EN	V	1000	
Rated impulse withstand voltage U_{imp}	kV	8	
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current I_{th}		A	70
Operational current I_e	AC-1 ($\leq 40^\circ\text{C}$) A 70 AC-1 ($\leq 55^\circ\text{C}$) A 60 AC-1 ($\leq 70^\circ\text{C}$) A 50 AC-3 ($\leq 440\text{V} \leq 55^\circ\text{C}$) A 40 AC-4 (400V) A 24		
Rated operational power AC-3 ($T \leq 55^\circ\text{C}$)	230V	kW	11
	400V	kW	18.5
	415V	kW	22
	440V	kW	22
	500V	kW	22
	690V	kW	30
	1000V	kW	18.5
Rated operational power AC-1 ($T \leq 40^\circ\text{C}$)	230V	kW	26
	400V	kW	46
	500V	kW	58
	690V	kW	79
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 1 poles in series	$\leq 24\text{V}$	A	40
	48V	A	35
	75V	A	30
	110V	A	8
	220V	A	—
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 2 poles in series	$\leq 24\text{V}$	A	48
	48V	A	48
	75V	A	45
	110V	A	42
	220V	A	5
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 3 poles in series	$\leq 24\text{V}$	A	48
	48V	A	48
	75V	A	48


	110V	A	44
	220V	A	56
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 4 poles in series			
	$\leq 24V$	A	—
	48V	A	—
	75V	A	—
	110V	A	—
	220V	A	70
IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 1 poles in series			
	$\leq 24V$	A	27
	48V	A	23
	75V	A	19
	110V	A	3
	220V	A	—
IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 2 poles in series			
	$\leq 24V$	A	32
	48V	A	30
	75V	A	27
	110V	A	22
	220V	A	5
IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 3 poles in series			
	$\leq 24V$	A	40
	48V	A	40
	75V	A	38
	110V	A	27
	220V	A	32
IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 4 poles in series			
	$\leq 24V$	A	—
	48V	A	—
	75V	A	—
	110V	A	—
	220V	A	40
Short-time allowable current for 10s (IEC/EN60947-1)			A 400
Protection fuse			
	gG (IEC)	A	100
	aM (IEC)	A	50
Making capacity (RMS value)			A 400
Breaking capacity at voltage			
	440V	A	320
	500V	A	265
	690V	A	256
Resistance per pole (average value)			m? 0.8
Power dissipation per pole (average value)			
	I _{th}	W	3.9
	AC3	W	1.3
Tightening torque for terminals			
	min	Nm	4
	max	Nm	5
	min	lbin	2.95
	max	lbin	3.69
Tightening torque for coil terminal			
	min	Nm	0.8
	max	Nm	1

	min	Ibin	0.8		
	max	Ibin	0.74		
Max number of wires simultaneously connectable	Nr. 2				
Conductor section					
AWG/Kcmil	max		2		
Flexible w/o lug conductor section	min	mm ²	1.5		
	max	mm ²	35		
Flexible c/w lug conductor section	min	mm ²	1.5		
	max	mm ²	35		
Power terminal protection according to IEC/EN 60529	IP20 front				
Mechanical features					
Operating position	normal allowable	Vertical plan ±30°			
Fixing	Screw / DIN rail 35mm				
Weight	g	1020			
Conductor section					
AWG/kcmil conductor section	max		2		
Operations					
Mechanical life	cycles	15000000			
Electrical life	cycles	1500000			
Safety related data					
Performance level B10d according to EN/ISO 13489-1	rated load	cycles	1500000		
	mechanical load	cycles	15000000		
Mirror contacts according to IEC/EN 609474-4-1	yes				
EMC compatibility	yes				
AC coil operating					
Rated AC voltage at 60Hz	V	120			
AC operating voltage					
of 60Hz coil powered at 60Hz					
pick-up	min	%Us	80		
	max	%Us	110		
drop-out	min	%Us	20		
	max	%Us	55		
AC average coil consumption at 20°C					
of 60Hz coil powered at 60Hz	in-rush	VA	210		
	holding	VA	15		
Dissipation at holding ≤20°C 50Hz	W	5			
Max cycles frequency					
Mechanical operation	cycles/h	3600			
Operating times					
Average time for Us control					
in AC					
	Closing NO				

		min	ms	12
		max	ms	28
Opening NO				
		min	ms	8
		max	ms	22
in DC				
Closing NO				
		min	ms	40
		max	ms	85
Opening NO				
		min	ms	20
		max	ms	55
UL technical data				
Full-load current (FLA) for three-phase AC motor				
		at 480V	A	40
		at 600V	A	32
Yielded mechanical performance				
for single-phase AC motor				
	110/120V	HP	3	
	230V	HP	7.5	
for three-phase AC motor				
	200/208V	HP	10	
	220/230V	HP	15	
	460/480V	HP	30	
	575/600V	HP	30	
General USE				
Contactor				
		AC current	A	70
Short-circuit protection fuse, 600V				
High fault				
	Short circuit current	kA	100	
	Fuse rating	A	150	
	Fuse class	J		
Standard fault				
	Short circuit current	kA	5	
	Fuse rating	A	150	
	Fuse class	RK5		
Ambient conditions				
Temperature				
Operating temperature				
	min	°C	-50	
	max	°C	70	
Storage temperature				
	min	°C	-60	
	max	°C	80	
Max altitude			m	3000
Resistance & Protection				
Pollution degree				3
Dimensions				

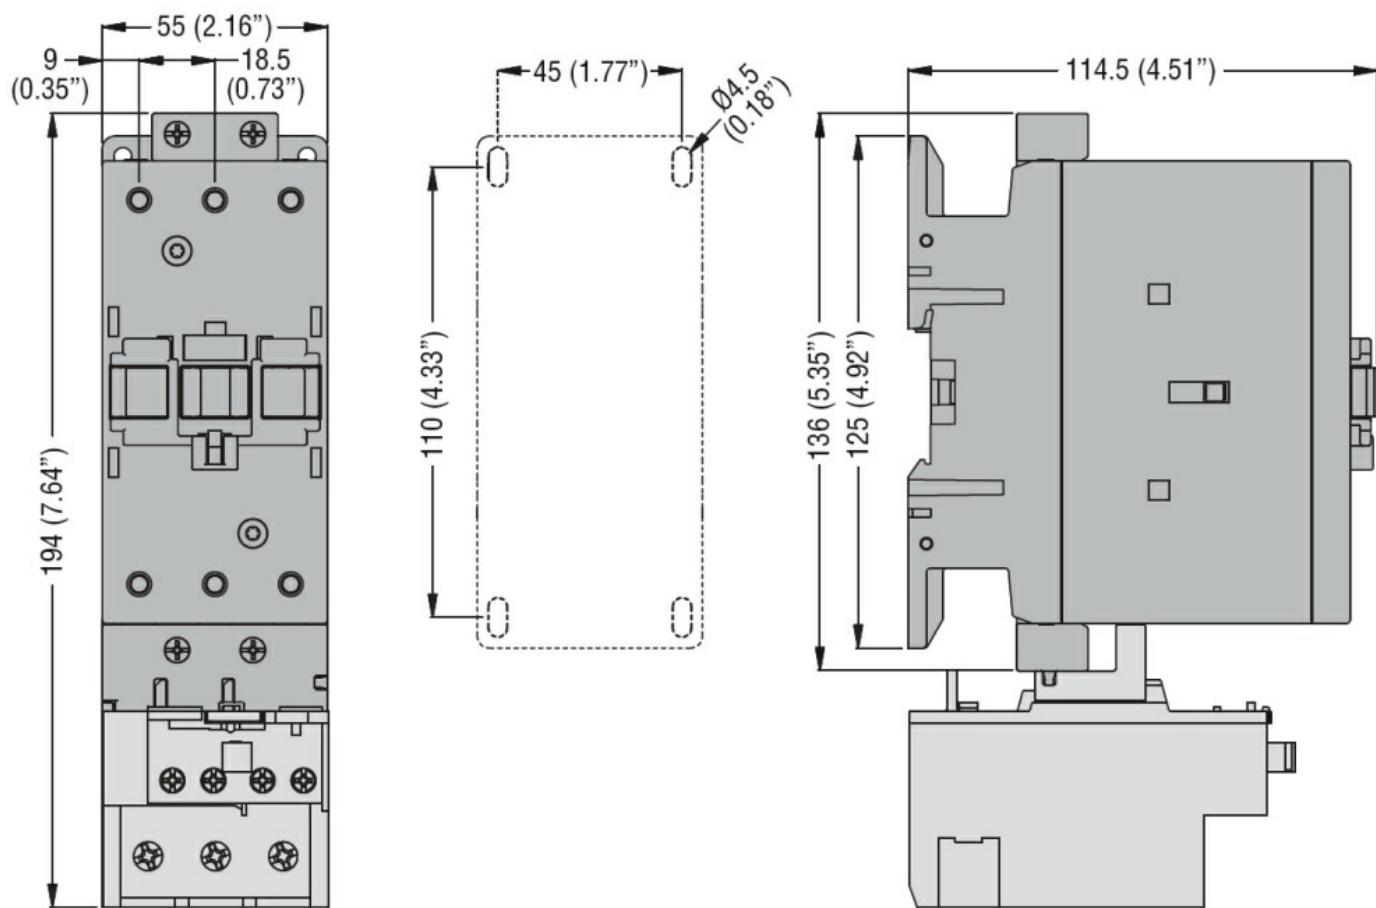

Wiring diagrams

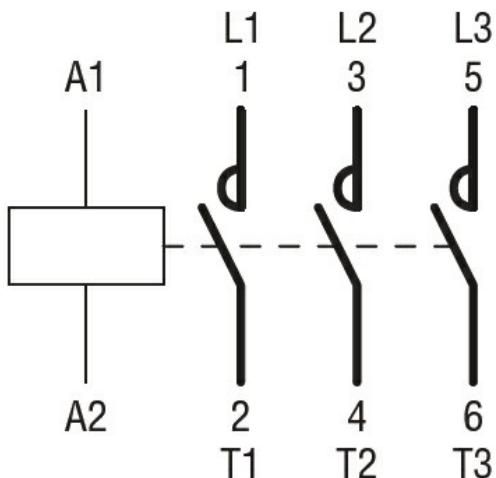

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

cULus

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching