



Product designation	Power contactor		
Product type designation	BF40		
Contact characteristics			
Number of poles	Nr.	4	
Rated insulation voltage U _i IEC/EN	V	1000	
Rated impulse withstand voltage U _{imp}	kV	8	
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current I _{th}		A	70
Operational current I _e			
	AC-1 (=40°C)	A	70
	AC-1 (=55°C)	A	60
	AC-1 (=70°C)	A	50
	AC-3 (=440V =55°C)	A	40
	AC-4 (400V)	A	24
Rated operational power AC-1 (T=40°C)			
	230V	kW	26
	400V	kW	46
	500V	kW	58
	690V	kW	79
IEC max current I _e in DC1 with L/R = 1ms with 1 poles in series			
	=24V	A	40
	48V	A	35
	75V	A	30
	110V	A	8
	220V	A	—
IEC max current I _e in DC1 with L/R = 1ms with 2 poles in series			
	=24V	A	48
	48V	A	48
	75V	A	45
	110V	A	42
	220V	A	5
IEC max current I _e in DC1 with L/R = 1ms with 3 poles in series			
	=24V	A	48
	48V	A	48
	75V	A	48
	110V	A	44
	220V	A	56
IEC max current I _e in DC1 with L/R = 1ms with 4 poles in series			
	=24V	A	—
	48V	A	—
	75V	A	—
	110V	A	—
	220V	A	70

IEC max current I_e in DC3-DC5 with $L/R = 15\text{ms}$ with 1 poles in series

=24V	A	27
48V	A	23
75V	A	19
110V	A	3
220V	A	—

IEC max current I_e in DC3-DC5 with $L/R = 15\text{ms}$ with 2 poles in series

=24V	A	32
48V	A	30
75V	A	27
110V	A	22
220V	A	5

IEC max current I_e in DC3-DC5 with $L/R = 15\text{ms}$ with 3 poles in series

=24V	A	40
48V	A	40
75V	A	38
110V	A	27
220V	A	32

IEC max current I_e in DC3-DC5 with $L/R = 15\text{ms}$ with 4 poles in series

=24V	A	—
48V	A	—
75V	A	—
110V	A	—
220V	A	40

Short-time allowable current for 10s (IEC/EN60947-1) A 400

Protection fuse

gG (IEC)	A	100
aM (IEC)	A	50

Making capacity (RMS value) A 400

Breaking capacity at voltage

440V	A	320
500V	A	265
690V	A	256

Resistance per pole (average value) m? 0.8

Power dissipation per pole (average value)

I _{th}	W	3.9
AC3	W	1.3

Tightening torque for terminals

min	Nm	4
max	Nm	5
min	lbin	2.95
max	lbin	3.69

Tightening torque for coil terminal

min	Nm	0.8
max	Nm	1
min	lbin	0.8
max	lbin	0.74

Max number of wires simultaneously connectable Nr. 2

Conductor section

AWG/Kcmil	max	2
Flexible w/o lug conductor section	min	mm ² 1.5

Flexible c/w lug conductor section	max	mm ²	35		
	min	mm ²	1.5		
	max	mm ²	35		
Power terminal protection according to IEC/EN 60529	IP20 front				
Mechanical features					
Operating position	normal	Vertical plan ±30°			
	allowable				
Fixing	Screw / DIN rail 35mm				
Weight	g	1240			
Conductor section					
AWG/kcmil conductor section	max	2			
Operations					
Mechanical life	cycles	15000000			
Electrical life	cycles	1500000			
Safety related data					
Performance level B10d according to EN/ISO 13489-1	rated load	cycles	1500000		
	mechanical load	cycles	15000000		
Mirror contacts according to IEC/EN 609474-4-1	yes				
EMC compatibility	yes				
AC coil operating					
Rated AC voltage at 50/60Hz	V	230			
AC operating voltage					
of 50/60Hz coil powered at 50Hz					
pick-up	min	%Us	80		
	max	%Us	110		
drop-out	min	%Us	20		
	max	%Us	55		
of 50/60Hz coil powered at 60Hz					
pick-up	min	%Us	85		
	max	%Us	110		
drop-out	min	%Us	40		
	max	%Us	55		
AC average coil consumption at 20°C					
of 50/60Hz coil powered at 50Hz	in-rush	VA	210		
	holding	VA	15		
of 50/60Hz coil powered at 60Hz	in-rush	VA	195		
	holding	VA	13		
of 60Hz coil powered at 60Hz	in-rush	VA	210		
	holding	VA	15		
Dissipation at holding =20°C 50Hz	W	5			
Max cycles frequency					
Mechanical operation	cycles/h	3600			

Operating times

Average time for Us control
in AC

	Closing NO	min	ms	12
		max	ms	28
	Opening NO	min	ms	8
		max	ms	22

in DC

	Closing NO	min	ms	40
		max	ms	85
	Opening NO	min	ms	20
		max	ms	55

UL technical data

Full-load current (FLA) for three-phase AC motor

at 480V	A	40
at 600V	A	32

Yielded mechanical performance

for single-phase AC motor

110/120V	HP	3
230V	HP	7.5

for three-phase AC motor

200/208V	HP	10
220/230V	HP	15
460/480V	HP	30
575/600V	HP	30

General USE

Contactor

AC current	A	70
------------	---	----

Short-circuit protection fuse, 600V

High fault

Short circuit current	kA	100
Fuse rating	A	150
Fuse class	J	

Standard fault

Short circuit current	kA	5
Fuse rating	A	150
Fuse class	RK5	

Ambient conditions

Temperature

Operating temperature

min	°C	-50
max	°C	70

Storage temperature

min	°C	-60
max	°C	80

Max altitude


m 3000

Resistance & Protection

Pollution degree


3

Dimensions

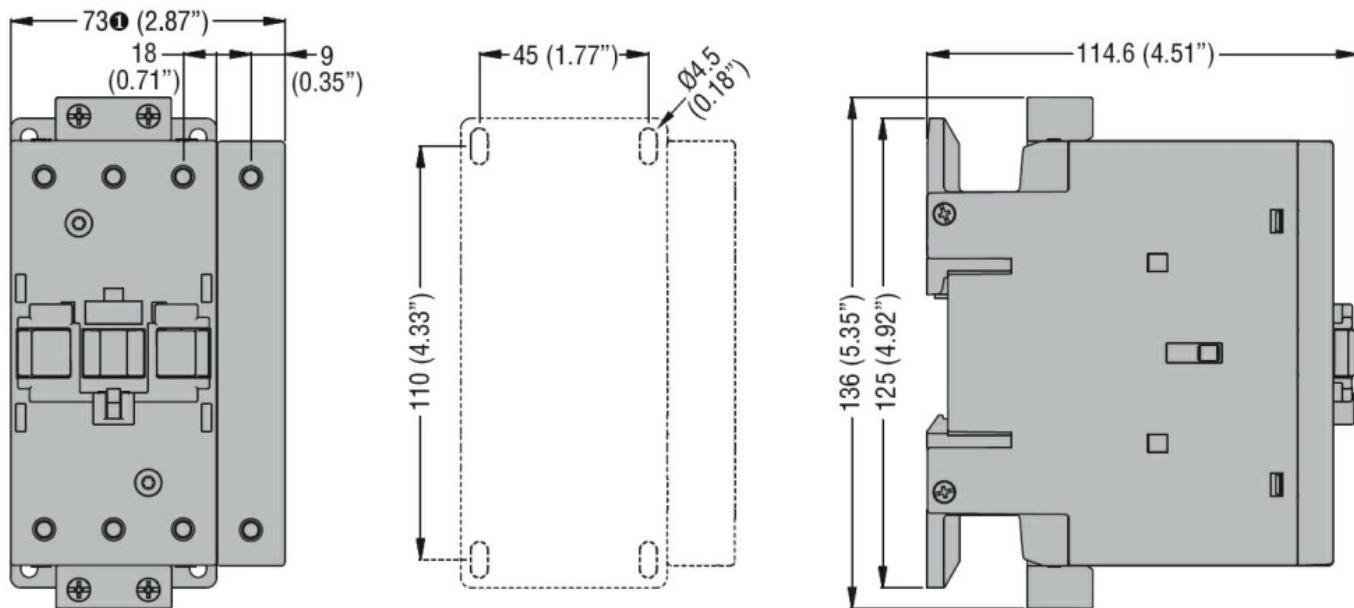

① BF80T2 82mm/3.23"

Wiring diagrams

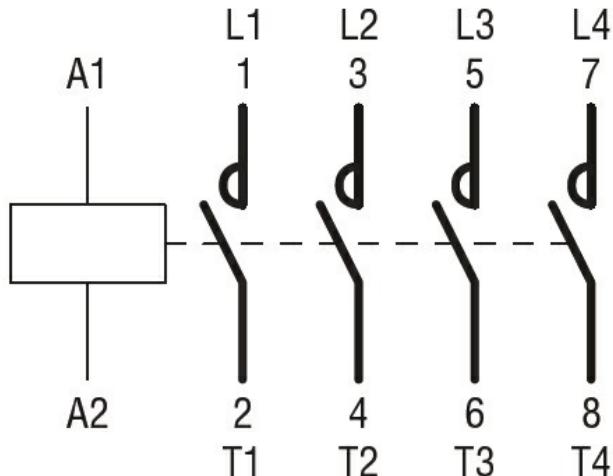

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

cULus

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching