




Product designation	Power contactor		
Product type designation	BF50		
<b>Contact characteristics</b>			
Number of poles	Nr.	3	
Rated insulation voltage $U_i$ IEC/EN	V	1000	
Rated impulse withstand voltage $U_{imp}$	kV	8	
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current $I_{th}$		A	90
Operational current $I_e$			
	AC-1 ( $=40^\circ\text{C}$ )	A	90
	AC-1 ( $=55^\circ\text{C}$ )	A	75
	AC-1 ( $=70^\circ\text{C}$ )	A	65
	AC-3 ( $=440\text{V} = 55^\circ\text{C}$ )	A	50
	AC-4 (400V)	A	28
Rated operational power AC-3 ( $T=55^\circ\text{C}$ )			
	230V	kW	11
	400V	kW	22
	415V	kW	22
	440V	kW	22
	500V	kW	22
	690V	kW	30
	1000V	kW	18.5
Rated operational power AC-1 ( $T=40^\circ\text{C}$ )			
	230V	kW	34
	400V	kW	59
	500V	kW	74
	690V	kW	102
IEC max current $I_e$ in DC1 with $L/R = 1\text{ms}$ with 1 poles in series			
	=24V	A	45
	48V	A	40
	75V	A	40
	110V	A	8
	220V	A	—
IEC max current $I_e$ in DC1 with $L/R = 1\text{ms}$ with 2 poles in series			
	=24V	A	60
	48V	A	60
	75V	A	60
	110V	A	50
	220V	A	7
IEC max current $I_e$ in DC1 with $L/R = 1\text{ms}$ with 3 poles in series			
	=24V	A	60
	48V	A	60
	75V	A	60

	110V	A	55
	220V	A	75
IEC max current Ie in DC1 with L/R = 1ms with 4 poles in series			
	=24V	A	60
	48V	A	60
	75V	A	60
	110V	A	60
	220V	A	90
IEC max current Ie in DC3-DC5 with L/R = 15ms with 1 poles in series			
	=24V	A	30
	48V	A	25
	75V	A	22
	110V	A	3
	220V	A	—
IEC max current Ie in DC3-DC5 with L/R = 15ms with 2 poles in series			
	=24V	A	35
	48V	A	35
	75V	A	30
	110V	A	25
	220V	A	5
IEC max current Ie in DC3-DC5 with L/R = 15ms with 3 poles in series			
	=24V	A	50
	48V	A	50
	75V	A	45
	110V	A	30
	220V	A	40
IEC max current Ie in DC3-DC5 with L/R = 15ms with 4 poles in series			
	=24V	A	55
	48V	A	55
	75V	A	55
	110V	A	45
	220V	A	50
Short-time allowable current for 10s (IEC/EN60947-1)			A 400
Protection fuse			
	gG (IEC)	A	100
	aM (IEC)	A	50
Making capacity (RMS value)			A 500
Breaking capacity at voltage			
	440V	A	400
	500V	A	352
	690V	A	312
Resistance per pole (average value)			m? 0.8
Power dissipation per pole (average value)			
	I <sub>th</sub>	W	6.5
	AC3	W	2
Tightening torque for terminals			
	min	Nm	4
	max	Nm	5
	min	lbin	2.95
	max	lbin	3.69
Tightening torque for coil terminal			
	min	Nm	0.8
	max	Nm	1


	min	Ibin	0.8		
	max	Ibin	0.74		
Max number of wires simultaneously connectable	Nr. 2				
Conductor section					
AWG/Kcmil	max		2		
Flexible w/o lug conductor section	min	mm <sup>2</sup>	1.5		
	max	mm <sup>2</sup>	35		
Flexible c/w lug conductor section	min	mm <sup>2</sup>	1.5		
	max	mm <sup>2</sup>	35		
Power terminal protection according to IEC/EN 60529	IP20 front				
<b>Mechanical features</b>					
Operating position	normal allowable	Vertical plan ±30°			
Fixing	Screw / DIN rail 35mm				
Weight	g	1020			
Conductor section					
AWG/kcmil conductor section	max		2		
<b>Operations</b>					
Mechanical life	cycles	15000000			
Electrical life	cycles	1400000			
<b>Safety related data</b>					
Performance level B10d according to EN/ISO 13489-1	rated load mechanical load	cycles	1400000 15000000		
Mirror contacts according to IEC/EN 609474-4-1	yes				
EMC compatibility	yes				
<b>AC coil operating</b>					
Rated AC voltage at 50/60Hz	V	400			
AC operating voltage					
of 50/60Hz coil powered at 50Hz					
pick-up	min	%Us	80		
	max	%Us	110		
drop-out	min	%Us	20		
	max	%Us	55		
of 50/60Hz coil powered at 60Hz					
pick-up	min	%Us	85		
	max	%Us	110		
drop-out	min	%Us	40		
	max	%Us	55		
AC average coil consumption at 20°C					
of 50/60Hz coil powered at 50Hz	in-rush holding	VA	210 15		

of 50/60Hz coil powered at 60Hz	in-rush	VA	195
	holding	VA	13
of 60Hz coil powered at 60Hz	in-rush	VA	210
	holding	VA	15
Dissipation at holding =20°C 50Hz		W	5
<b>Max cycles frequency</b>			
Mechanical operation		cycles/h	3600
<b>Operating times</b>			
Average time for Us control			
in AC			
Closing NO	min	ms	12
	max	ms	28
Opening NO	min	ms	8
	max	ms	22
in DC			
Closing NO	min	ms	40
	max	ms	85
Opening NO	min	ms	20
	max	ms	55
<b>UL technical data</b>			
Full-load current (FLA) for three-phase AC motor			
	at 480V	A	52
	at 600V	A	41
Yielded mechanical performance			
for single-phase AC motor	110/120V	HP	5
	230V	HP	10
for three-phase AC motor	200/208V	HP	15
	220/230V	HP	20
	460/480V	HP	40
	575/600V	HP	40
<b>General USE</b>			
Contactor	AC current	A	90
Short-circuit protection fuse, 600V			
High fault	Short circuit current	kA	100
	Fuse rating	A	150
	Fuse class	J	
Standard fault	Short circuit current	kA	5
	Fuse rating	A	150
	Fuse class	RK5	
<b>Ambient conditions</b>			
Temperature	Operating temperature	min	°C
			-50

	max	°C	70
Storage temperature	min	°C	-60
	max	°C	80
Max altitude	m		3000
Resistance & Protection			
Pollution degree			3
Dimensions			

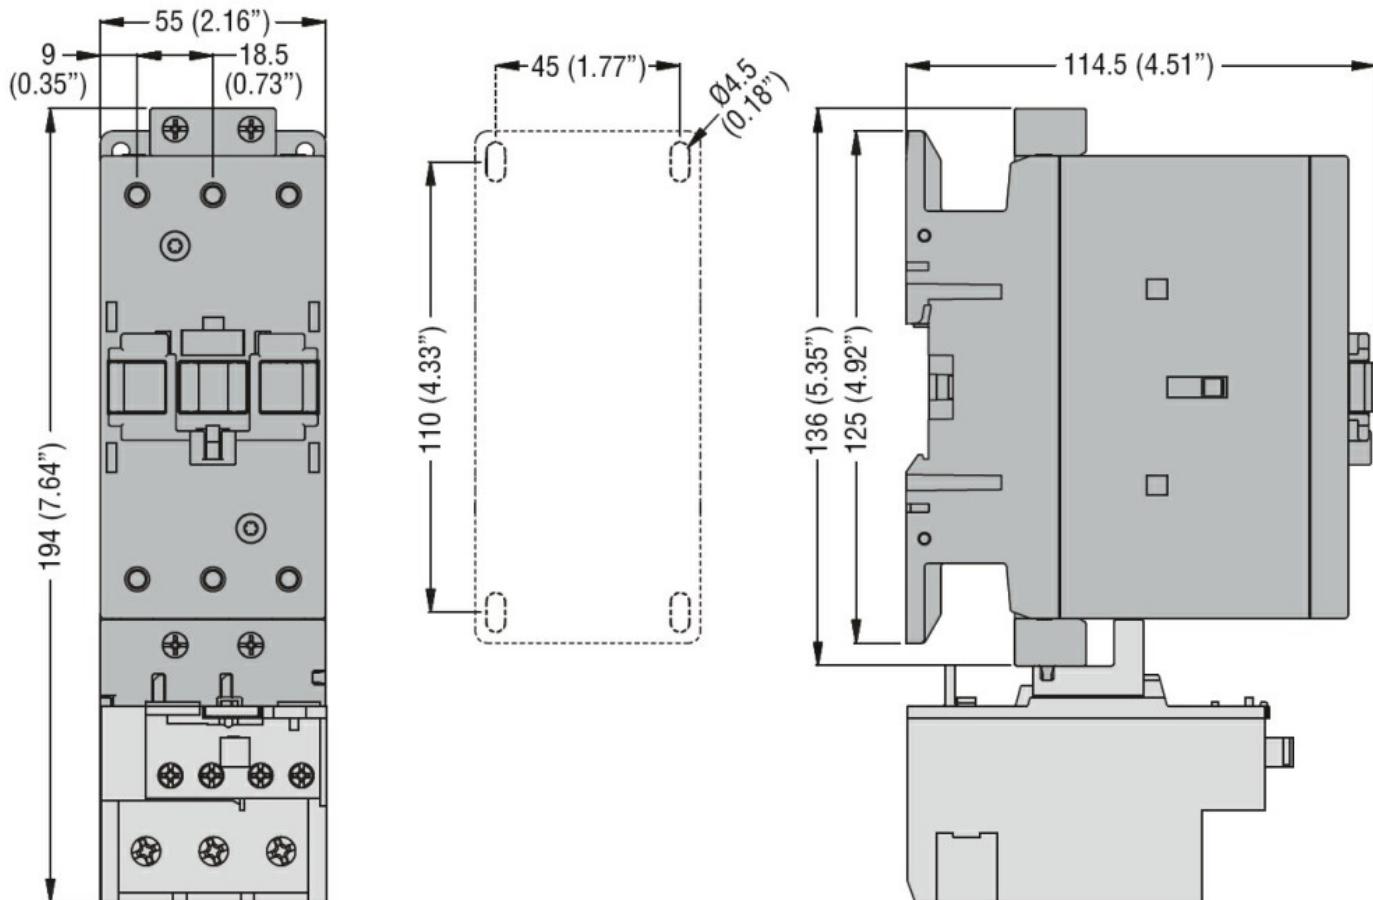

#### Wiring diagrams

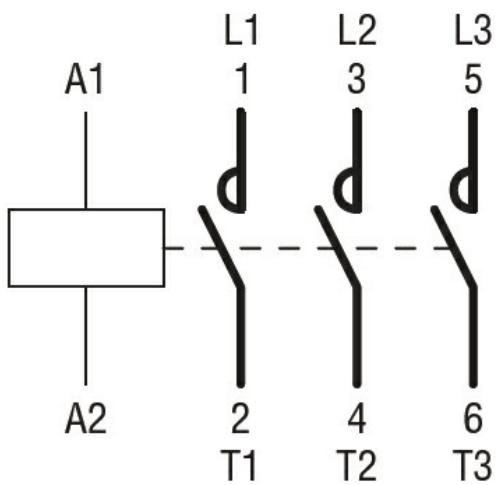

#### Certifications and compliance

##### Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

cULus

ETIM classification

ETIM 8.0

EC000066 -  
Power contactor,  
AC switching