




Product designation	Power contactor		
Product type designation	BF65		
<b>Contact characteristics</b>			
Number of poles	Nr.	3	
Rated insulation voltage $U_i$ IEC/EN	V	1000	
Rated impulse withstand voltage $U_{imp}$	kV	8	
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current $I_{th}$	A	100	
Operational current $I_e$			
	AC-1 ( $\leq 40^\circ C$ )	A	100
	AC-1 ( $\leq 55^\circ C$ )	A	80
	AC-1 ( $\leq 70^\circ C$ )	A	70
	AC-3 ( $\leq 440V \leq 55^\circ C$ )	A	65
	AC-4 (400V)	A	31
Rated operational power AC-3 ( $T \leq 55^\circ C$ )	230V	kW	18.5
	400V	kW	30
	415V	kW	37
	440V	kW	37
	500V	kW	37
	690V	kW	45
	1000V	kW	30
Rated operational power AC-1 ( $T \leq 40^\circ C$ )	230V	kW	38
	400V	kW	65
	500V	kW	82
	690V	kW	114
IEC max current $I_e$ in DC1 with $L/R \leq 1ms$ with 1 poles in series	$\leq 24V$	A	50
	48V	A	50
	75V	A	50
	110V	A	8
	220V	A	—
IEC max current $I_e$ in DC1 with $L/R \leq 1ms$ with 2 poles in series	$\leq 24V$	A	70
	48V	A	70
	75V	A	70
	110V	A	60
	220V	A	9
IEC max current $I_e$ in DC1 with $L/R \leq 1ms$ with 3 poles in series	$\leq 24V$	A	70
	48V	A	70
	75V	A	70


	110V	A	60
	220V	A	90
IEC max current $I_e$ in DC1 with $L/R \leq 1\text{ms}$ with 4 poles in series			
	$\leq 24V$	A	70
	48V	A	70
	75V	A	70
	110V	A	70
	220V	A	110
IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 1 poles in series			
	$\leq 24V$	A	35
	48V	A	25
	75V	A	25
	110V	A	3
	220V	A	—
IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 2 poles in series			
	$\leq 24V$	A	45
	48V	A	40
	75V	A	40
	110V	A	30
	220V	A	5
IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 3 poles in series			
	$\leq 24V$	A	55
	48V	A	50
	75V	A	50
	110V	A	35
	220V	A	52
IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 4 poles in series			
	$\leq 24V$	A	60
	48V	A	60
	75V	A	60
	110V	A	50
	220V	A	65
Short-time allowable current for 10s (IEC/EN60947-1)			A 640
Protection fuse			
	gG (IEC)	A	125
	aM (IEC)	A	80
Making capacity (RMS value)			A 650
Breaking capacity at voltage			
	440V	A	520
	500V	A	425
	690V	A	376
Resistance per pole (average value)			m? 0.8
Power dissipation per pole (average value)			
	I <sub>th</sub>	W	8
	AC3	W	3.4
Tightening torque for terminals			
	min	Nm	4
	max	Nm	5
	min	lbin	2.95
	max	lbin	3.69
Tightening torque for coil terminal			
	min	Nm	0.8
	max	Nm	1

	min	Ibin	0.8		
	max	Ibin	0.74		
Max number of wires simultaneously connectable	Nr. 2				
Conductor section					
AWG/Kcmil	max		2		
Flexible w/o lug conductor section	min	mm <sup>2</sup>	1.5		
	max	mm <sup>2</sup>	35		
Flexible c/w lug conductor section	min	mm <sup>2</sup>	1.5		
	max	mm <sup>2</sup>	35		
Power terminal protection according to IEC/EN 60529	IP20 front				
<b>Mechanical features</b>					
Operating position	normal allowable	Vertical plan ±30°			
Fixing	Screw / DIN rail 35mm				
Weight	g	1020			
Conductor section					
AWG/kcmil conductor section	max		2		
<b>Operations</b>					
Mechanical life	cycles	15000000			
Electrical life	cycles	1400000			
<b>Safety related data</b>					
Performance level B10d according to EN/ISO 13489-1	rated load	cycles	1400000		
	mechanical load	cycles	15000000		
Mirror contacts according to IEC/EN 609474-4-1	yes				
EMC compatibility	yes				
<b>AC coil operating</b>					
Rated AC voltage at 60Hz	V	220			
AC operating voltage					
of 60Hz coil powered at 60Hz					
pick-up	min	%Us	80		
	max	%Us	110		
drop-out	min	%Us	20		
	max	%Us	55		
AC average coil consumption at 20°C					
of 60Hz coil powered at 60Hz	in-rush	VA	210		
	holding	VA	15		
Dissipation at holding ≤20°C 50Hz	W	5			
<b>Max cycles frequency</b>					
Mechanical operation	cycles/h	3600			
<b>Operating times</b>					
Average time for Us control					
in AC					
	Closing NO				

		min	ms	12
		max	ms	28
Opening NO				
		min	ms	8
		max	ms	22
in DC				
Closing NO				
		min	ms	40
		max	ms	85
Opening NO				
		min	ms	20
		max	ms	55
<b>UL technical data</b>				
Full-load current (FLA) for three-phase AC motor				
		at 480V	A	65
		at 600V	A	62
<b>Yielded mechanical performance</b>				
for three-phase AC motor				
	200/208V	HP	20	
	220/230V	HP	25	
	460/480V	HP	50	
	575/600V	HP	60	
<b>General USE</b>				
Contactor				
		AC current	A	100
Short-circuit protection fuse, 600V				
High fault				
	Short circuit current	kA	100	
	Fuse rating	A	200	
	Fuse class	J		
Standard fault				
	Short circuit current	kA	10	
	Fuse rating	A	200	
	Fuse class	RK5		
<b>Ambient conditions</b>				
Temperature				
Operating temperature				
	min	°C	-50	
	max	°C	70	
Storage temperature				
	min	°C	-60	
	max	°C	80	
Max altitude				m 3000
Resistance & Protection				
Pollution degree				3
Dimensions				

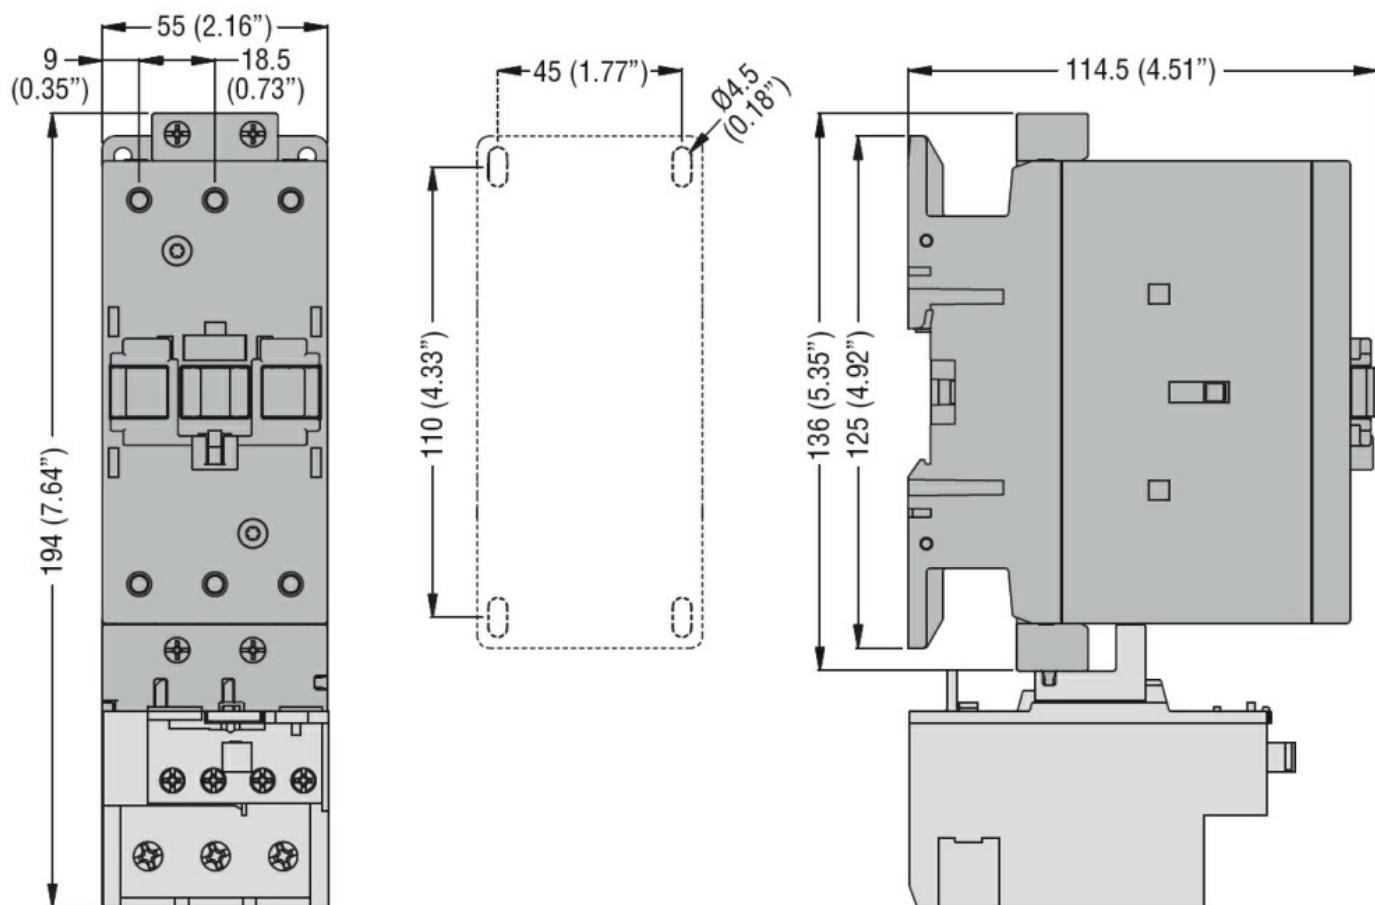

#### Wiring diagrams

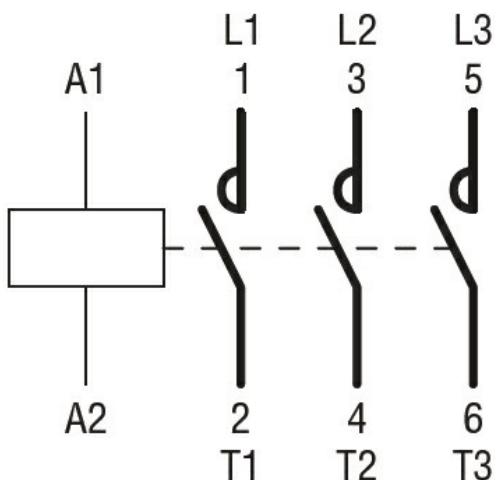

#### Certifications and compliance

##### Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

##### Certificates

CCC

---

cULus

ETIM classification

ETIM 8.0

EC000066 -  
Power contactor,  
AC switching