




Product designation	Power contactor		
Product type designation	BF80		
Contact characteristics			
Number of poles	Nr.	3	
Rated insulation voltage U_i IEC/EN	V	1000	
Rated impulse withstand voltage U_{imp}	kV	8	
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current I_{th}	A	115	
Operational current I_e			
AC-1 ($=40^\circ\text{C}$)	A	115	
AC-1 ($=55^\circ\text{C}$)	A	95	
AC-1 ($=70^\circ\text{C}$)	A	80	
AC-3 ($=440\text{V} = 55^\circ\text{C}$)	A	80	
AC-4 (400V)	A	38	
Rated operational power AC-3 ($T=55^\circ\text{C}$)			
230V	kW	22	
400V	kW	45	
415V	kW	45	
440V	kW	45	
500V	kW	55	
690V	kW	55	
1000V	kW	37	
Rated operational power AC-1 ($T=40^\circ\text{C}$)			
230V	kW	43	
400V	kW	76	
500V	kW	95	
690V	kW	120	
IEC max current I_e in DC1 with $L/R = 1\text{ms}$ with 1 poles in series			
=24V	A	70	
48V	A	60	
75V	A	60	
110V	A	8	
220V	A	—	
IEC max current I_e in DC1 with $L/R = 1\text{ms}$ with 2 poles in series			
=24V	A	100	
48V	A	100	
75V	A	100	
110V	A	80	
220V	A	9	
IEC max current I_e in DC1 with $L/R = 1\text{ms}$ with 3 poles in series			
=24V	A	100	
48V	A	100	
75V	A	100	

	110V	A	85
	220V	A	95
IEC max current Ie in DC1 with L/R = 1ms with 4 poles in series			
	=24V	A	100
	48V	A	100
	75V	A	100
	110V	A	100
	220V	A	115
IEC max current Ie in DC3-DC5 with L/R = 15ms with 1 poles in series			
	=24V	A	40
	48V	A	30
	75V	A	30
	110V	A	3
	220V	A	—
IEC max current Ie in DC3-DC5 with L/R = 15ms with 2 poles in series			
	=24V	A	60
	48V	A	50
	75V	A	50
	110V	A	40
	220V	A	5
IEC max current Ie in DC3-DC5 with L/R = 15ms with 3 poles in series			
	=24V	A	80
	48V	A	70
	75V	A	70
	110V	A	60
	220V	A	64
IEC max current Ie in DC3-DC5 with L/R = 15ms with 4 poles in series			
	=24V	A	90
	48V	A	90
	75V	A	90
	110V	A	75
	220V	A	80
Short-time allowable current for 10s (IEC/EN60947-1)			A 640
Protection fuse			
	gG (IEC)	A	125
	aM (IEC)	A	80
Making capacity (RMS value)			A 800
Breaking capacity at voltage			
	440V	A	640
	500V	A	625
	690V	A	456
Resistance per pole (average value)			m? 0.6
Power dissipation per pole (average value)			
	Ith	W	7.9
	AC3	W	3.8
Tightening torque for terminals			
	min	Nm	4
	max	Nm	5
	min	lbin	2.95
	max	lbin	3.69
Tightening torque for coil terminal			
	min	Nm	0.8
	max	Nm	1


	min	Ibin	0.8		
	max	Ibin	0.74		
Max number of wires simultaneously connectable	Nr. 2				
Conductor section					
AWG/Kcmil	max		2		
Flexible w/o lug conductor section	min	mm ²	1.5		
	max	mm ²	35		
Flexible c/w lug conductor section	min	mm ²	1.5		
	max	mm ²	35		
Power terminal protection according to IEC/EN 60529	IP20 front				
Mechanical features					
Operating position	normal allowable	Vertical plan ±30°			
Fixing	Screw / DIN rail 35mm				
Weight	g	1020			
Conductor section					
AWG/kcmil conductor section	max		2		
Operations					
Mechanical life	cycles	15000000			
Electrical life	cycles	1300000			
Safety related data					
Performance level B10d according to EN/ISO 13489-1	rated load mechanical load	cycles	1300000 15000000		
Mirror contacts according to IEC/EN 609474-4-1	yes				
EMC compatibility	yes				
AC coil operating					
Rated AC voltage at 50/60Hz	V	400			
AC operating voltage					
of 50/60Hz coil powered at 50Hz					
pick-up	min	%Us	80		
	max	%Us	110		
drop-out	min	%Us	20		
	max	%Us	55		
of 50/60Hz coil powered at 60Hz					
pick-up	min	%Us	85		
	max	%Us	110		
drop-out	min	%Us	40		
	max	%Us	55		
AC average coil consumption at 20°C					
of 50/60Hz coil powered at 50Hz	in-rush holding	VA	210 15		

of 50/60Hz coil powered at 60Hz	in-rush	VA	195
	holding	VA	13
of 60Hz coil powered at 60Hz	in-rush	VA	210
	holding	VA	15
Dissipation at holding =20°C 50Hz		W	5
Max cycles frequency			
Mechanical operation		cycles/h	3600
Operating times			
Average time for Us control			
in AC			
Closing NO	min	ms	12
	max	ms	28
Opening NO	min	ms	8
	max	ms	22
in DC			
Closing NO	min	ms	40
	max	ms	85
Opening NO	min	ms	20
	max	ms	55
UL technical data			
Full-load current (FLA) for three-phase AC motor			
	at 480V	A	77
	at 600V	A	77
Yielded mechanical performance			
for three-phase AC motor			
	200/208V	HP	25
	220/230V	HP	30
	460/480V	HP	60
	575/600V	HP	75
General USE			
Contactor	AC current	A	115
Short-circuit protection fuse, 600V			
High fault	Short circuit current	kA	100
	Fuse rating	A	200
	Fuse class	J	
Standard fault	Short circuit current	kA	10
	Fuse rating	A	200
	Fuse class	RK5	
Ambient conditions			
Temperature	Operating temperature	min	°C
		max	°C
Storage temperature	min	°C	-60

	max	°C	80
Max altitude	m		3000
Resistance & Protection			3
Pollution degree			
Dimensions			

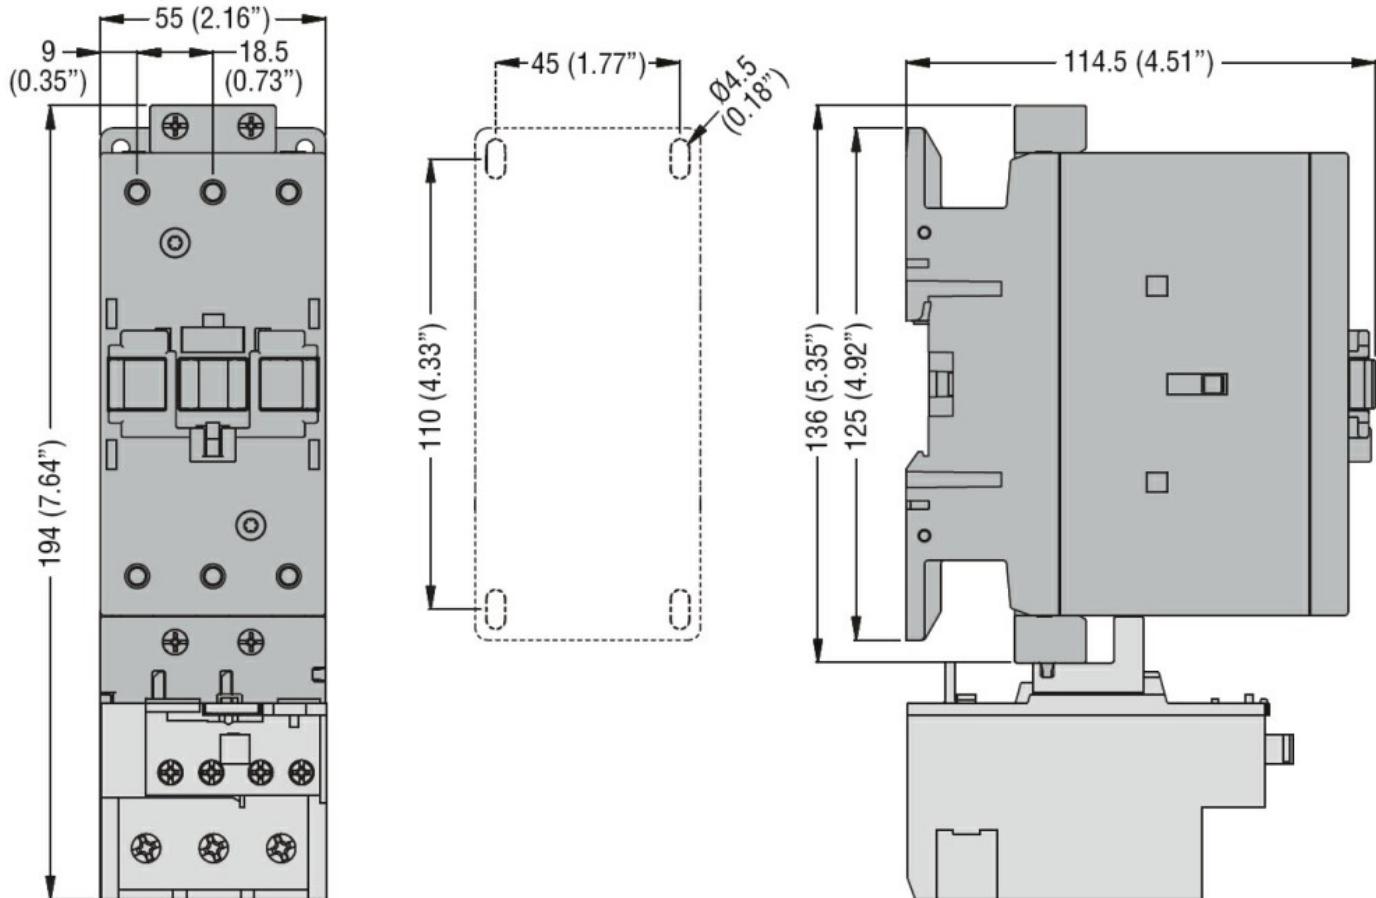

Wiring diagrams

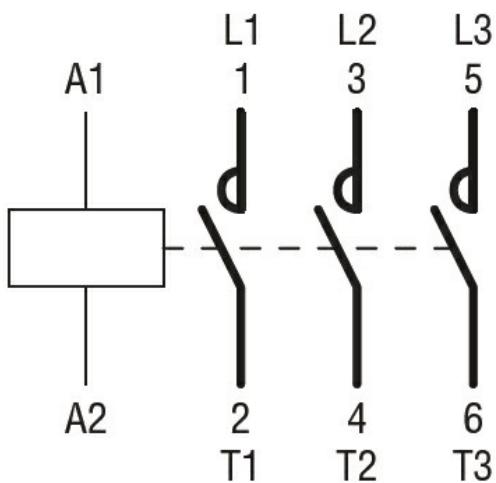

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

cULus

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching