



Product designation	Power contactor		
Product type designation	BF95		
Contact characteristics			
Number of poles	Nr.	3	
Rated insulation voltage U_i IEC/EN	V	1000	
Rated impulse withstand voltage U_{imp}	kV	8	
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current I_{th}		A	140
Operational current I_e			
	AC-1 ($\leq 40^\circ C$)	A	140
	AC-1 ($\leq 55^\circ C$)	A	115
	AC-1 ($\leq 70^\circ C$)	A	100
	AC-3 ($\leq 440V \leq 55^\circ C$)	A	95
	AC-4 (400V)	A	45
Rated operational power AC-3 ($T \leq 55^\circ C$)			
	230V	kW	30
	400V	kW	55
	415V	kW	55
	440V	kW	55
	500V	kW	75
	690V	kW	90
	1000V	kW	45
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 1 poles in series			
	$\leq 24V$	A	140
	48V	A	140
	75V	A	100
	110V	A	10
	220V	A	—
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 2 poles in series			
	$\leq 24V$	A	140
	48V	A	140
	75V	A	140
	110V	A	110
	220V	A	12
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 3 poles in series			
	$\leq 24V$	A	140
	48V	A	140
	75V	A	155
	110V	A	120
	220V	A	125
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 4 poles in series			
	$\leq 24V$	A	140
	48V	A	140

	75V	A	155
	110V	A	140
	220V	A	140
IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 1 poles in series			
	$\leq 24\text{V}$	A	140
	48V	A	44
	75V	A	36
	110V	A	6
	220V	A	—
IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 2 poles in series			
	$\leq 24\text{V}$	A	140
	48V	A	63
	75V	A	60
	110V	A	55
	220V	A	7
IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 3 poles in series			
	$\leq 24\text{V}$	A	140
	48V	A	115
	75V	A	90
	110V	A	85
	220V	A	76
IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 4 poles in series			
	$\leq 24\text{V}$	A	140
	48V	A	110
	75V	A	110
	110V	A	105
	220V	A	95
Short-time allowable current for 10s (IEC/EN60947-1)			A 760
Protection fuse			
	gG (IEC)	A	160
	aM (IEC)	A	100
Making capacity (RMS value)			A 1200
Breaking capacity at voltage			
	440V	A	1100
	500V	A	775
	690V	A	745
Resistance per pole (average value)			m? 0.45
Power dissipation per pole (average value)			
	I _{th}	W	8.8
	AC3	W	4.1
Tightening torque for terminals			
	min	Nm	6
	max	Nm	7
	min	lbin	4.4
	max	lbin	5.2
Tightening torque for coil terminal			
	min	Nm	0.8
	max	Nm	1
	min	lbin	0.59
	max	lbin	0.74
Conductor section			
	AWG/Kcmil		
		max	2/0

Flexible w/o lug conductor section	min	mm ²	1.5
	max	mm ²	70
Flexible c/w lug conductor section	min	mm ²	1.5
	max	mm ²	70
Power terminal protection according to IEC/EN 60529			IP20 front
Mechanical features			
Operating position	normal allowable		Vertical plan ±30°
Fixing			Screw / DIN rail 35mm
Weight	g		2020
Conductor section			
AWG/kcmil conductor section	max		2/0
Auxiliary contact characteristics			
Thermal current I _{th}	A		140
Operations			
Mechanical life	cycles		15000000
Electrical life	cycles		1400000
AC coil operating			
Rated AC voltage at 60Hz	V		48
AC operating voltage			
of 60Hz coil powered at 60Hz			
pick-up	min	%Us	80
	max	%Us	110
drop-out	min	%Us	20
	max	%Us	55
AC average coil consumption at 20°C			
of 60Hz coil powered at 60Hz	in-rush holding	VA VA	300 20
Dissipation at holding ≤20°C 50Hz	W		6.5
Max cycles frequency			
Mechanical operation	cycles/h		1500
Operating times			
Average time for Us control			
in AC			
Closing NO	min	ms	16
	max	ms	32
Opening NO	min	ms	9
	max	ms	24
UL technical data			
Yielded mechanical performance			
for three-phase AC motor	200/208V 220/230V 460/480V	HP	30 30 60

575/600V HP 75


General USE

Contactor	AC current	A	150
Short-circuit protection fuse, 600V High fault	Short circuit current Fuse rating Fuse class	kA A J	100 200 RK5
Standard fault	Short circuit current Fuse rating Fuse class	kA A RK5	10 250


Ambient conditions

Temperature	Operating temperature	min °C	-50
		max °C	70
	Storage temperature	min °C	-60
		max °C	+80
Max altitude		m	3000

Dimensions

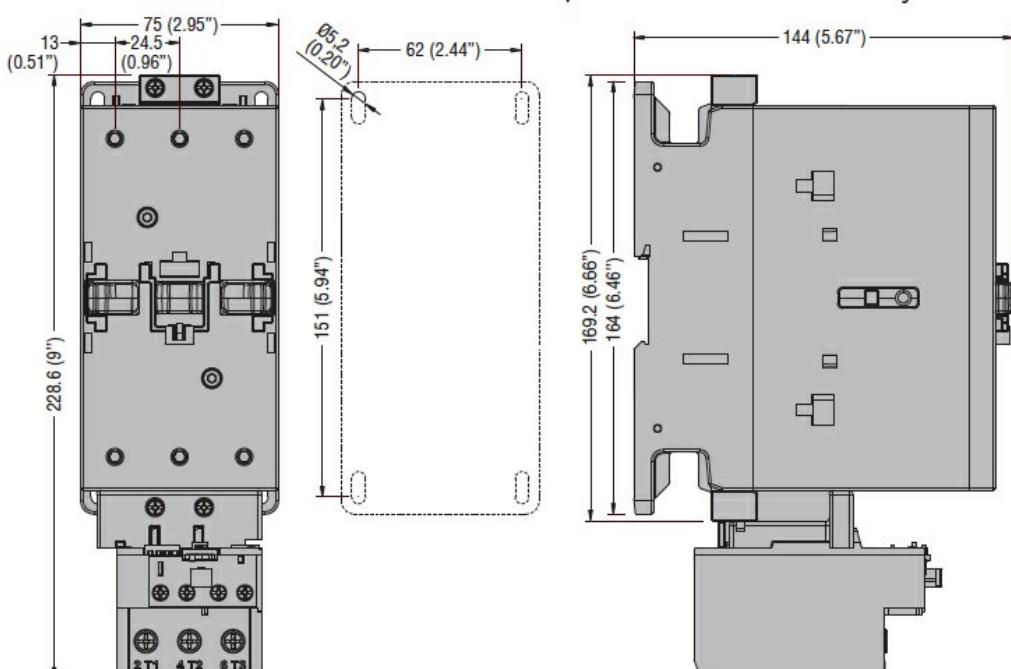

Wiring diagrams

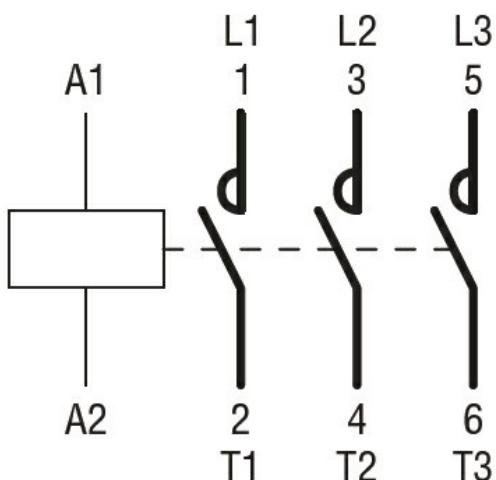

Certifications and compliance

Compliance

[CSA C22.2 n° 60947-1](#)

[CSA C22.2 n° 60947-4-1](#)

[IEC/EN 60947-1](#)

[IEC/EN 60947-4-1](#)

[UL 60947-1](#)

[UL 60947-4-1](#)

Certificates

[CCC](#)

[cULus](#)

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching