






Product designation	SOCKET	
Product type designation	HR5X	
Contact characteristics		
Rated insulation voltage Ui IEC/EN	V	250
Rated impulse withstand voltage U_{imp}	kV	4
Mechanical features		
Fixing	DIN rail or with screws	
Dimensions		

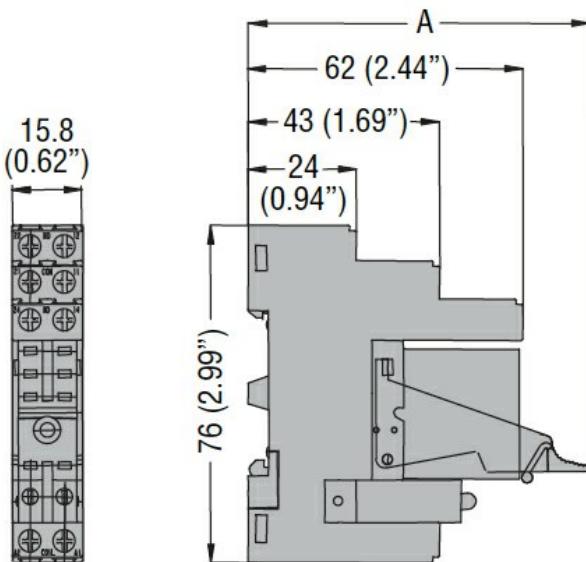

A: 65mm (2.56") con HR3X88
75mm (2.95") con XR5X88

Wiring diagrams

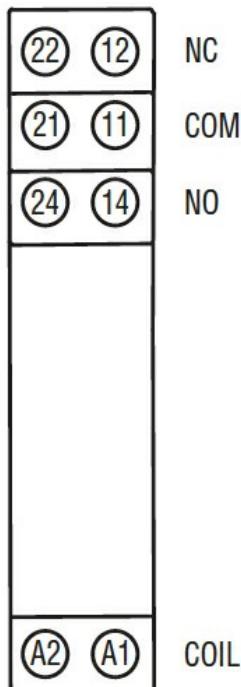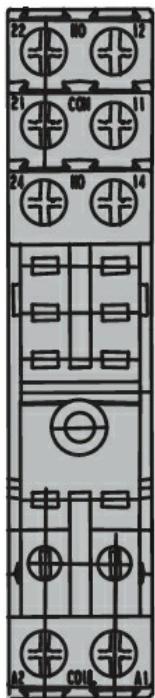

Certifications and compliance

Compliance

IEC/EN 61810

Certificates

CSA

cURus

EAC

ETIM classification

ETIM 8.0

EC001456 -
Relay socket