





Product designation	Roller side push lever				
Product type designation	KCD				
General characteristics					
Material	Housing	Polymer thermoplastic			
	Roller	Metal			
Contact characteristics					
Type of contact	2NO Snap action				
Thermal current I_{th}	A	10			
IEC/EN 60947-5-1 designation	A600 Q300				
Rated insulation voltage U_i	V	690			
Rated impulse withstand voltage U_{imp}	kV	6			
Insulation class	II				
Short-circuit protection with fuse	Class/A	10 gG/SC QUICK FUSE			
Switching speed	min	m/s	0.5		
	max	m/s	1.5		
IEC Conventional free air thermal current I_{th}	A	10			
Resistance per pole (average value)	m?	<10			
Mechanical features					
Operating head fixing	Locking bayonet insert				
Operating torque	N	6			
	lb	1.34			
Tightening torque (Max)					
Switch fixing	Nm	2.5			
	lbin	22.1			
Contact terminals	Nm	0.8			
	lbin	7			
Body lid screw fixing	Nm	0.8			
	lbin	7			
Conductor section					
AWG/Kcmil	min	16			
	max	14			
IEC	min	mm ²	1 or 2		
	max	mm ²	2.5		

Cable connection	Self-releasing screw terminal																		
Cable entry	M20 on the sides																		
Operations																			
Mechanical life	cycles <10000000																		
Mechanical operation	cycles/h 3600																		
Ambient conditions																			
Temperature	<table border="1"> <tr> <td>Operating temperature</td> <td>min</td> <td>°C</td> <td>-25</td> </tr> <tr> <td></td> <td>max</td> <td>°C</td> <td>+70</td> </tr> </table> <table border="1"> <tr> <td>Storage temperature</td> <td>min</td> <td>°C</td> <td>-40</td> </tr> <tr> <td></td> <td>max</td> <td>°C</td> <td>+70</td> </tr> </table>			Operating temperature	min	°C	-25		max	°C	+70	Storage temperature	min	°C	-40		max	°C	+70
Operating temperature	min	°C	-25																
	max	°C	+70																
Storage temperature	min	°C	-40																
	max	°C	+70																
Resistance & Protection																			
IP degree	<table border="1"> <tr> <td>Terminals</td> <td>IP20</td> </tr> <tr> <td>Body housing</td> <td>IP65</td> </tr> </table>			Terminals	IP20	Body housing	IP65												
Terminals	IP20																		
Body housing	IP65																		
Pollution degree	3																		
Dimensions																			

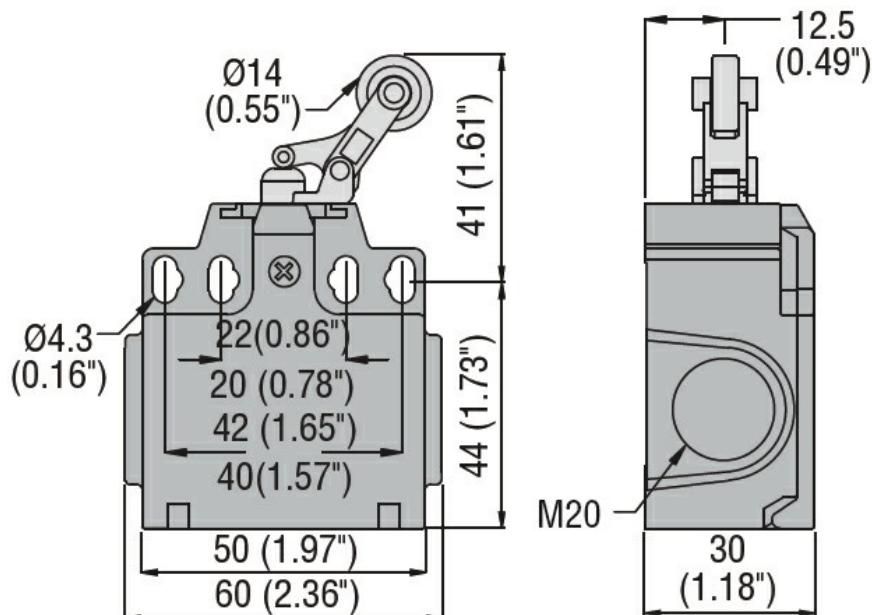

Wiring diagrams

Snap action

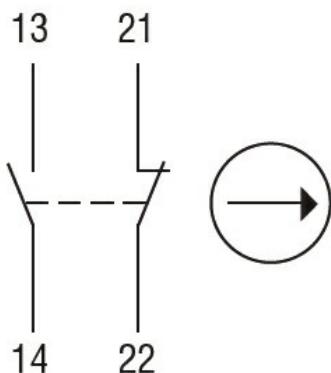

1NO + 1NC

Certifications and compliance

Compliance

CSA C22.2 n° 14

EN 50047

IEC/EN 60204-1

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000030 - End
switch