


LIMIT SWITCH, K SERIES, WOBBLE STICK, OMNIDIRECTIONAL, 2 SIDE CABLE ENTRY.
DIMENSIONS COMPATIBLE TO EN 50047, PLASTIC BODY, CONTACTS 1NO+1NC SLOW ACTION MAKE BEFORE BREAK. SEMIRIGID ROD



Product designation	Wobble stick, omnidirectional KCM				
Product type designation	KCM				
General characteristics					
Material	Housing	Polymer thermoplastic			
	Rod	Semirigid			
Contact characteristics					
Type of contact	1NO+1NC Slow action make before break				
Thermal current I_{th}	A	10			
IEC/EN 60947-5-1 designation	A600 Q300				
Rated insulation voltage U_i	V	690			
Rated impulse withstand voltage U_{imp}	kV	6			
Insulation class	II				
Short-circuit protection with fuse	Class/A	10 gG/SC QUICK FUSE			
Switching speed					
	min	m/s	0.5		
	max	m/s	1.5		
IEC Conventional free air thermal current I_{th}	A	10			
Resistance per pole (average value)	m?	<10			
Mechanical features					
Operating head fixing	Locking bayonet insert				
Operating torque	Ncm	1			
	ozin	1.42			
Tightening torque (Max)					
Switch fixing	Nm	2.5			
	lbin	22.1			
Contact terminals	Nm	0.8			
	lbin	7			
Body lid screw fixing	Nm	0.8			
	lbin	7			
Conductor section					
AWG/Kcmil	min	16			
	max	14			
IEC	min	mm ²	1 or 2		


LIMIT SWITCH, K SERIES, WOBBLE STICK, OMNIDIRECTIONAL, 2 SIDE CABLE ENTRY.
DIMENSIONS COMPATIBLE TO EN 50047, PLASTIC BODY, CONTACTS 1NO+1NC SLOW
ACTION MAKE BEFORE BREAK. SEMIRIGID ROD

	max	mm ²	2.5
Cable connection			Self-releasing screw terminal
Cable entry			M20 on the sides
Operations			
Mechanical life		cycles	<10000000
Mechanical operation		cycles/h	3600
Ambient conditions			
Temperature			
Operating temperature	min	°C	-25
	max	°C	+70
Storage temperature	min	°C	-40
	max	°C	+70
Resistance & Protection			
IP degree	Terminals	IP20	
	Body housing	IP65	
Pollution degree		3	
Dimensions			

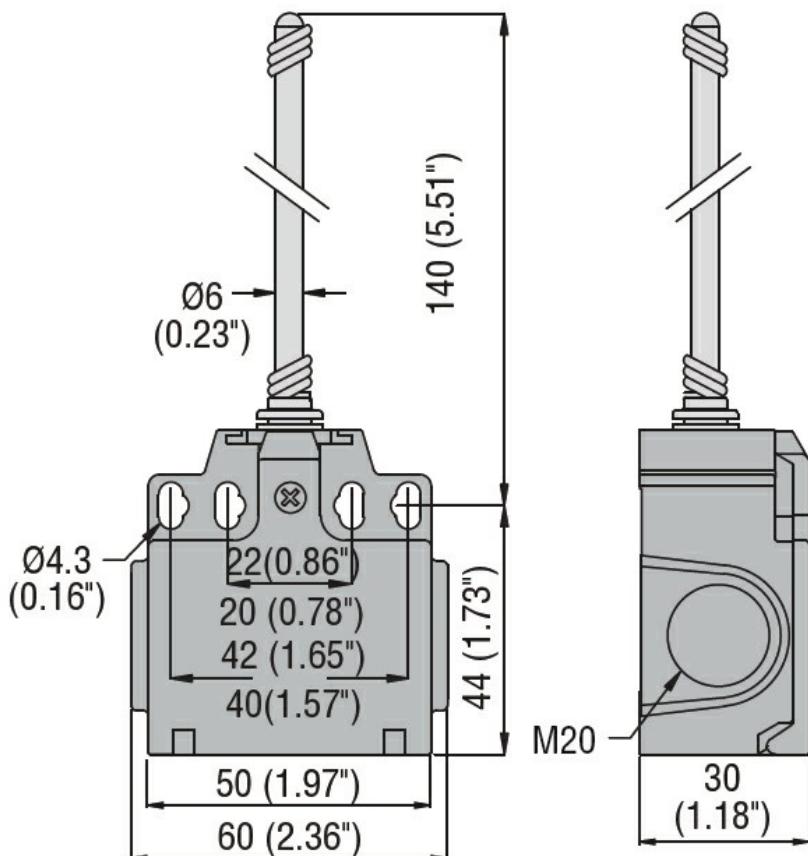

Wiring diagrams

Slow action

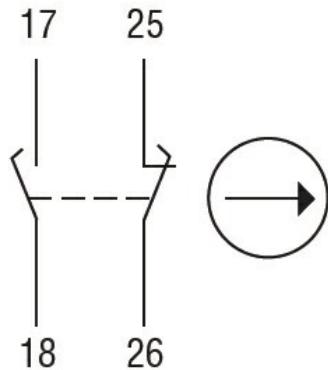

1NO + 1NC
make before break

Certifications and compliance

Compliance

CSA C22.2 n° 14

EN 50047

IEC/EN 60204-1

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000030 - End
switch