



Adjustable rod
lever
KML

Product designation

Product type designation

General characteristics

Material

Housing	Aluminium-zinc alloy
Rod	Aluminium-zinc alloy

Contact characteristics

Type of contact	2NC Independent		
Thermal current Ith	A	10	
IEC/EN 60947-5-1 designation	A300 Q300		
Rated insulation voltage Ui	V	440	
Rated impulse withstand voltage Uimp	kV	4	
Short-circuit protection with fuse	Class/A	10 gG/SC QUICK FUSE	
Switching speed	min	m/s	0.5
	max	m/s	1.5
IEC Conventional free air thermal current Ith	A	10	
Resistance per pole (average value)	m?	<10	

Mechanical features

Operating head fixing			Locking bayonet insert	
Operating torque			Ncm	3
			ozin	4.25
Tightening torque (Max)				
Switch fixing			Nm	2.5
			lbin	22.1
Contact terminals			Nm	0.8
			lbin	7
Body lid screw fixing			Nm	0.8
			lbin	7
Conductor section				
AWG/Kcmil			min	16
			max	14
IEC			min	mm ² 1or 2
			max	mm ² 2.5

Cable connection	Self-releasing screw terminal
Cable entry	M20 on the bottom

Operations

Mechanical life	cycles	<10000000
Mechanical operation	cycles/h	3600


Ambient conditions

Temperature	Operating temperature	min	°C	-25
		max	°C	+70
	Storage temperature	min	°C	-40
		max	°C	+70

Resistance & Protection


IP degree	Terminals	IP20
	Body housing	IP65
Pollution degree		3

Dimensions

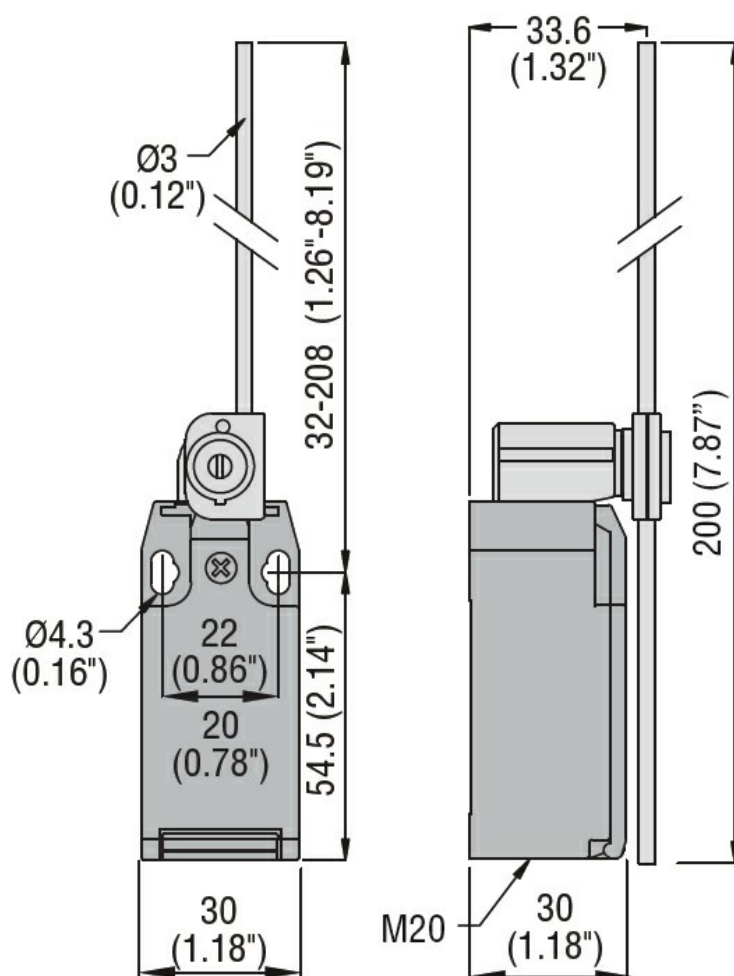

Wiring diagrams

Snap action

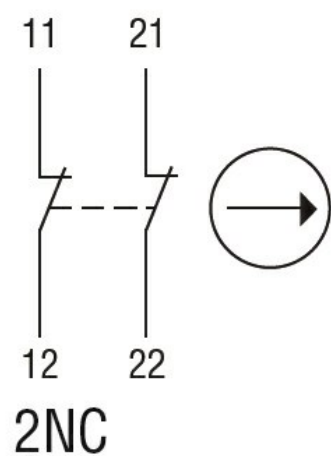

Certifications and compliance

Compliance

CSA C22.2 n° 14

EN 50047

IEC/EN 60204-1

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000030 - End
switch