



Product designation

Adjustable rod lever

Product type designation

KML

General characteristics

Material

Housing	Aluminium-zinc alloy
Rod	Aluminium-zinc alloy

Contact characteristics

Type of contact	3NC Slow action
Thermal current I_{th}	A 10
IEC/EN 60947-5-1 designation	A300 Q300
Rated insulation voltage U_i	V 440
Rated impulse withstand voltage U_{imp}	kV 4
Short-circuit protection with fuse	Class/A 10 gG/SC QUICK FUSE

Switching speed

min	m/s	0.5
max	m/s	1.5

IEC Conventional free air thermal current I_{th}

A 10

Resistance per pole (average value)

m? <10

Mechanical features

Operating head fixing	Locking bayonet insert
Operating torque	Ncm 3 ozin 4.25

Tightening torque (Max)

Switch fixing	Nm 2.5 lbin 22.1
---------------	---------------------

Contact terminals	Nm 0.8 lbin 7
-------------------	------------------


Body lid screw fixing	Nm 0.8 lbin 7
-----------------------	------------------

Conductor section

AWG/Kcmil	min 16 max 14
-----------	------------------


IEC	min mm ² 1 or 2 max mm ² 2.5
-----	---

Cable connection	Self-releasing screw terminal										
Cable entry	M20 on the bottom										
Operations											
Mechanical life	cycles <10000000										
Mechanical operation	cycles/h 3600										
Ambient conditions											
Temperature	<table> <tr> <td>Operating temperature</td> <td>min</td> <td>°C</td> <td>-25</td> </tr> <tr> <td></td> <td>max</td> <td>°C</td> <td>+70</td> </tr> </table>			Operating temperature	min	°C	-25		max	°C	+70
Operating temperature	min	°C	-25								
	max	°C	+70								
Storage temperature	<table> <tr> <td>min</td> <td>°C</td> <td>-40</td> </tr> <tr> <td>max</td> <td>°C</td> <td>+70</td> </tr> </table>			min	°C	-40	max	°C	+70		
min	°C	-40									
max	°C	+70									
Resistance & Protection											
IP degree	<table> <tr> <td>Terminals</td> <td>IP20</td> </tr> <tr> <td>Body housing</td> <td>IP65</td> </tr> </table>			Terminals	IP20	Body housing	IP65				
Terminals	IP20										
Body housing	IP65										
Pollution degree	3										
Dimensions											

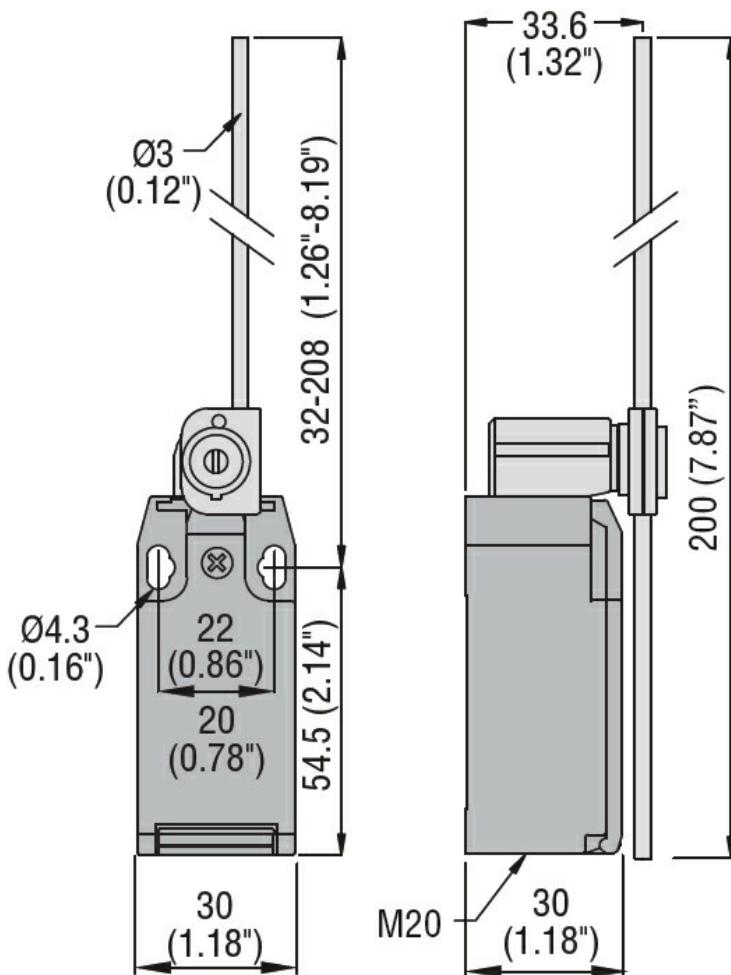

Wiring diagrams

Slow action

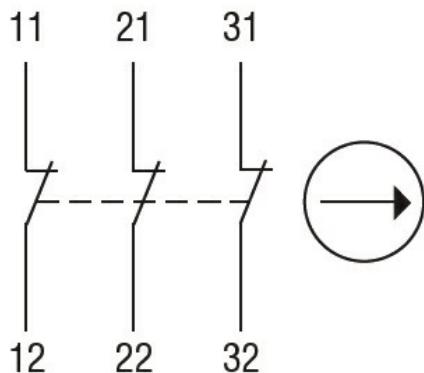

3NC

Certifications and compliance

Compliance

CSA C22.2 n° 14
EN 50047
IEC/EN 60204-1
IEC/EN 60947-1
IEC/EN 60947-5-1
UL508

Certificates

CCC
cULus
EAC

ETIM classification

ETIM 8.0

EC000030 - End
switch