



Product designation

Product type designation

Roller lever
plunger
KNE

General characteristics

Material

Housing

Aluminium-zinc
alloy
Metal

Roller

Contact characteristics


Type of contact		2NC Snap action
Thermal current Ith	A	10
IEC/EN 60947-5-1 designation		A300 Q300
Rated insulation voltage Ui	V	440
Rated impulse withstand voltage Uimp	kV	4
Short-circuit protection with fuse	Class/A	10 gG/SC QUICK FUSE
Switching speed	min max	m/s 0.5 m/s 1.5
IEC Conventional free air thermal current Ith	A	10
Resistance per pole (average value)	m?	<10

Mechanical features

Operating head fixing		Locking bayonet insert
Operating torque	Ncm ozin	3 4.25
Tightening torque (Max)		
Switch fixing	Nm lbin	2.5 22.1
Contact terminals	Nm lbin	0.8 7
Body lid screw fixing	Nm lbin	0.8 7
Conductor section		
AWG/Kcmil	min max	16 14
IEC	min max	mm ² mm ² 1or 2 2.5
Cable connection		Self-releasing screw terminal


LIMIT SWITCH, K SERIES, ROLLER LEVER PLUNGER, 2 SIDE CABLE ENTRY. DIMENSIONS COMPATIBLE TO EN 50047, METAL BODY, CONTACTS 2NC SNAP ACTION. METAL ROLLER

Cable entry			M20 on the sides		
Operations					
Mechanical life			cycles	<10000000	
Mechanical operation			cycles/h	3600	
Ambient conditions					
Temperature					
Operating temperature			min	°C	-25
			max	°C	+70
Storage temperature			min	°C	-40
			max	°C	+70
Resistance & Protection					
IP degree					
			Terminals		IP20
			Body housing		IP65
Pollution degree					3
Dimensions					

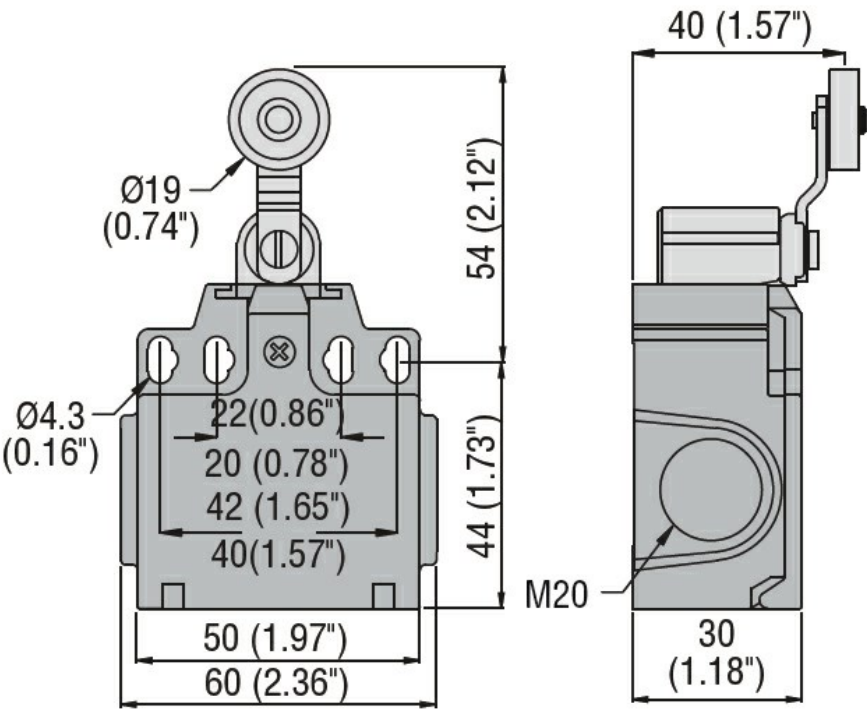

Wiring diagrams

Snap action

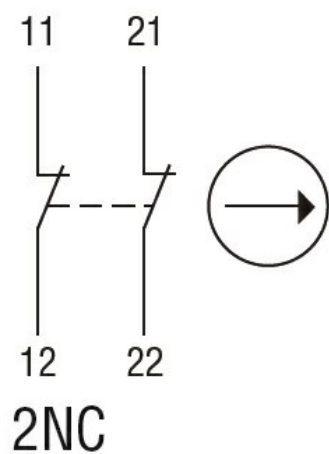

Certifications and compliance

Compliance

CSA C22.2 n° 14
EN 50047
IEC/EN 60204-1
IEC/EN 60947-1
IEC/EN 60947-5-1
UL508

Certificates

CCC
cULus
EAC

ETIM classification

ETIM 8.0

EC000030 - End
switch