





Product designation	Wobble stick, omnidirectional KNM				
Product type designation	KNM				
<b>General characteristics</b>					
Material	Housing	Aluminium-zinc alloy	Aluminium-zinc alloy		
	Rod	Semirigid	Semirigid		
<b>Contact characteristics</b>					
Type of contact	1NO+1NC Snap action				
Thermal current $I_{th}$	A	10	10		
IEC/EN 60947-5-1 designation	A300 Q300				
Rated insulation voltage $U_i$	V	440	440		
Rated impulse withstand voltage $U_{imp}$	kV	4	4		
Short-circuit protection with fuse	Class/A	10 gG/SC QUICK FUSE			
Switching speed	min	m/s	0.5		
	max	m/s	1.5		
IEC Conventional free air thermal current $I_{th}$	A	10	10		
Resistance per pole (average value)	m?	<10			
<b>Mechanical features</b>					
Operating head fixing	Locking bayonet insert				
Operating torque	Ncm	1	1		
	ozin	1.42	1.42		
Tightening torque (Max)					
Switch fixing	Nm	2.5	2.5		
	lbin	22.1	22.1		
Contact terminals	Nm	0.8	0.8		
	lbin	7	7		
Body lid screw fixing	Nm	0.8	0.8		
	lbin	7	7		
Conductor section					
AWG/Kcmil	min	16	16		
	max	14	14		
IEC	min	mm <sup>2</sup>	1 or 2		
	max	mm <sup>2</sup>	2.5		

Cable connection	Self-releasing screw terminal																		
Cable entry	M20 on the sides																		
Operations																			
Mechanical life	cycles <10000000																		
Mechanical operation	cycles/h 3600																		
Ambient conditions																			
Temperature	<table border="1"> <tr> <td>Operating temperature</td> <td>min</td> <td>°C</td> <td>-25</td> </tr> <tr> <td></td> <td>max</td> <td>°C</td> <td>+70</td> </tr> </table> <table border="1"> <tr> <td>Storage temperature</td> <td>min</td> <td>°C</td> <td>-40</td> </tr> <tr> <td></td> <td>max</td> <td>°C</td> <td>+70</td> </tr> </table>			Operating temperature	min	°C	-25		max	°C	+70	Storage temperature	min	°C	-40		max	°C	+70
Operating temperature	min	°C	-25																
	max	°C	+70																
Storage temperature	min	°C	-40																
	max	°C	+70																
Resistance & Protection																			
IP degree	<table border="1"> <tr> <td>Terminals</td> <td>IP20</td> </tr> <tr> <td>Body housing</td> <td>IP65</td> </tr> </table>			Terminals	IP20	Body housing	IP65												
Terminals	IP20																		
Body housing	IP65																		
Pollution degree	3																		
Dimensions																			

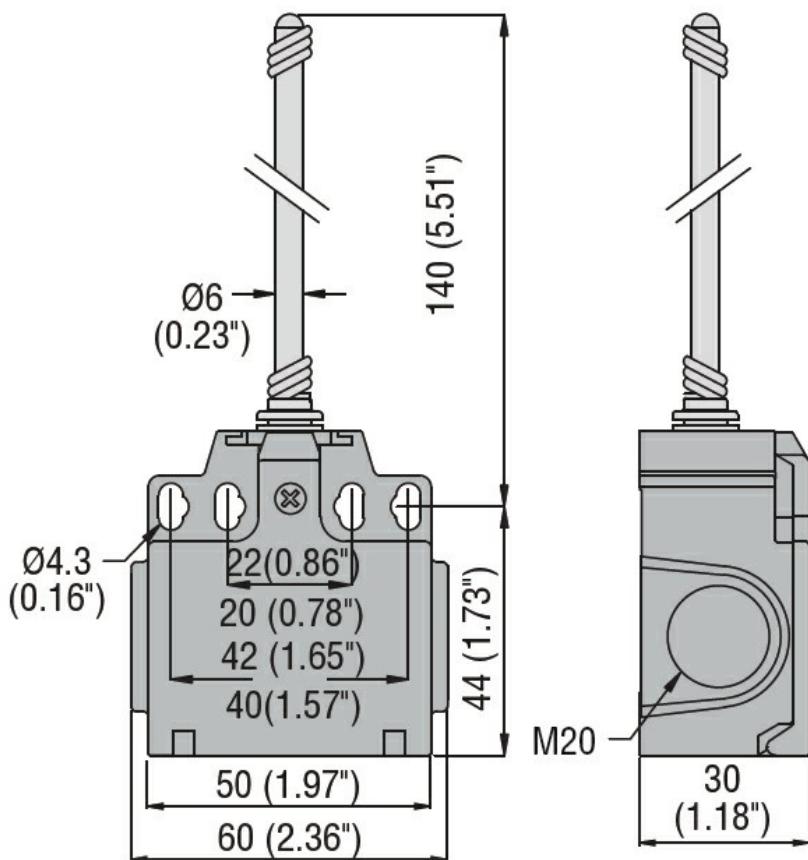

**Wiring diagrams**

## Snap action

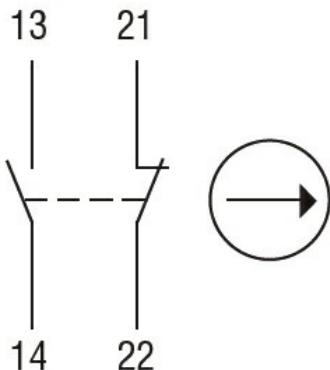

**1NO + 1NC**

### Certifications and compliance

#### Compliance

CSA C22.2 n° 14

EN 50047

IEC/EN 60204-1

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

#### Certificates

CCC

cULus

EAC

### ETIM classification

ETIM 8.0

EC000030 - End  
switch