



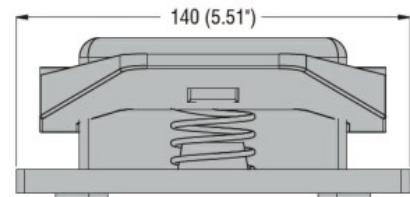

Product designation	One pedal, with safety lever - open					
Product type designation	KR110					
General characteristics						
Material						
	Housing	Aluminium-zinc alloy				
Contact characteristics						
Type of contact	1NO+1NC Snap action					
Thermal current I_{th}	A	10				
IEC/EN 60947-5-1 designation	A300 Q300					
Rated insulation voltage U_i	V	440				
Rated impulse withstand voltage U_{imp}	kV	4				
Short-circuit protection with fuse	Class/A	10 gG fuse				
IEC Conventional free air thermal current I_{th}	A	10				
Resistance per pole (average value)	m?	<10				
Mechanical features						
Tightening torque (Max)	Contact terminals					
	Nm	1				
	lbin	0.74lbft				
Cable connection	Self-releasing screw terminal					
Cable entry	1 x M20					
Operations						
Mechanical life	cycles	>10000000				
Ambient conditions						
Temperature	Operating temperature					
	min	$^{\circ}$ C	-25			
	max	$^{\circ}$ C	+70			
Storage temperature	Storage temperature					
	min	$^{\circ}$ C	-40			
	max	$^{\circ}$ C	+70			
Resistance & Protection						
IP degree	Terminals	IP20				
	Body housing	IP54				
Pollution degree	3					
Dimensions						

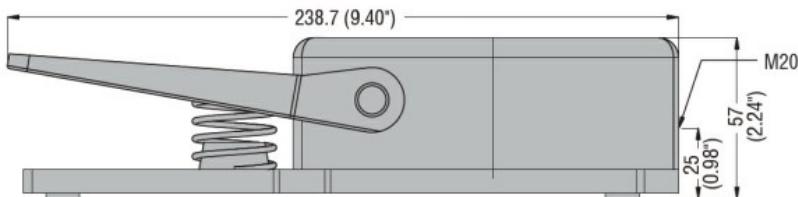

Certifications and compliance

Compliance

EN 60447.

IEC/EN 60204-1

IEC/EN 60947-1

IEC/EN 60947-5-1

Certificates

EAC

ETIM classification

ETIM 8.0

EC001258 - Foot
switch