




Product designation	One pedal, with safety lever - with cover				
Product type designation	KR210				
General characteristics					
Material	Housing	Aluminium-zinc alloy			
Contact characteristics					
Type of contact	2NO+2NC Snap action				
Thermal current I_{th}	A	10			
IEC/EN 60947-5-1 designation	A300 Q300				
Rated insulation voltage U_i	V	440			
Rated impulse withstand voltage U_{imp}	kV	4			
Short-circuit protection with fuse	Class/A	10 gG fuse			
IEC Conventional free air thermal current I_{th}	A	10			
Resistance per pole (average value)	m?	<10			
Mechanical features					
Tightening torque (Max)	Contact terminals	Nm	1		
		lbin	0.74lbft		
Cable connection	Self-releasing screw terminal				
Cable entry	1 x M20				
Operations					
Mechanical life	cycles	>10000000			
Ambient conditions					
Temperature	Operating temperature	min	$^{\circ}\text{C}$ -25		
		max	$^{\circ}\text{C}$ +70		
Storage temperature		min	$^{\circ}\text{C}$ -40		
		max	$^{\circ}\text{C}$ +70		
Resistance & Protection					
IP degree	Terminals	IP20			
	Body housing	IP54			
Pollution degree	3				
Dimensions					

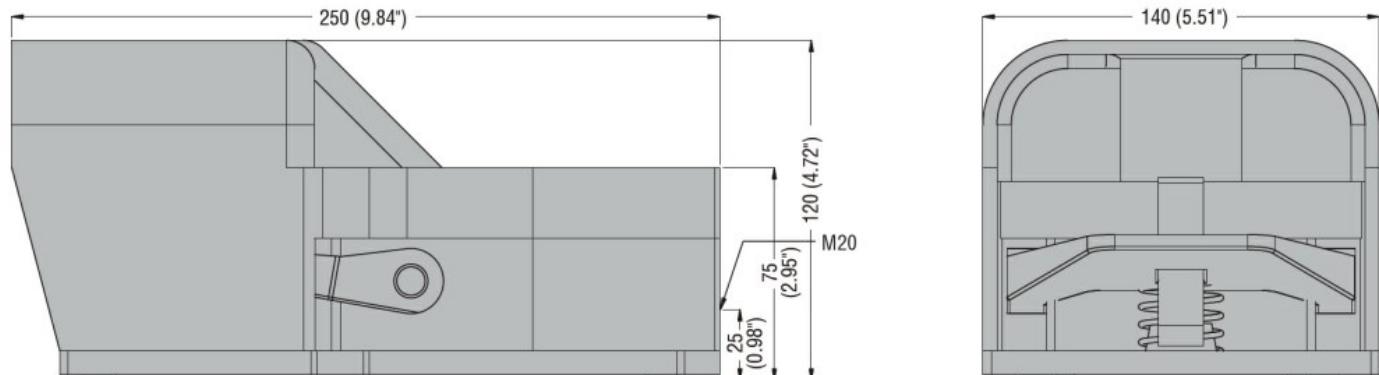

Certifications and compliance

Compliance

EN 60447.

IEC/EN 60204-1

IEC/EN 60947-1

IEC/EN 60947-5-1

Certificates

EAC

ETIM classification

ETIM 8.0

EC001258 - Foot switch