





Product designation	Push button		
Product type designation	KSA9		
General characteristics			
Material	Housing Polymer thermoplastic		
Contact characteristics			
Type of contact	1NO/NC		
Thermal current I_{th}	A 15		
IEC/EN 60947-5-1 designation	A600 P300		
Rated insulation voltage U_i	V 250		
Switching speed	min	m/s	0.01
	max	m/s	1
Operating speed	min	m/s	0.05
	max	m/s	1
IEC Conventional free air thermal current I_{th}	A 15		
Resistance per pole (average value)	m? <15		
Conductivity	10mA 5V		
Mechanical features			
Terminals type	Faston		
Operating head fixing	Fixed		
Operating torque	N ozin	1.5 5.4	
Weight	g 35		
Operations			
Mechanical life	cycles 20000000		
Electrical life	cycles 500000		
Mechanical operation	cycles/h 240		
Ambient conditions			
Temperature	Operating temperature min °C -25 max °C +70		
	Storage temperature min °C -40 max °C +70		
Resistance & Protection			
IP degree	Body housing IP00 or IP20 with terminal shroud		
Pollution degree	3		
Dimensions			

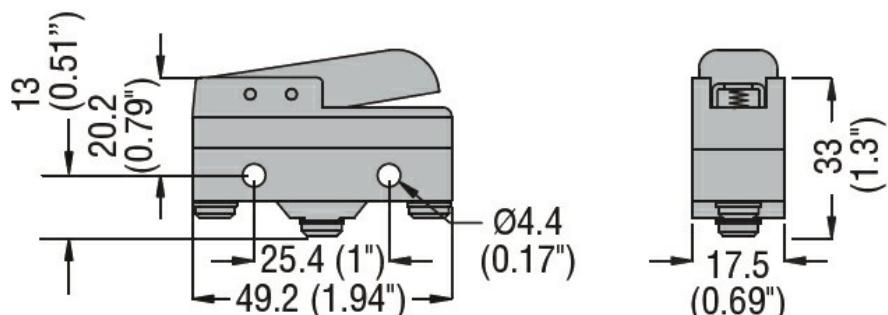

Wiring diagrams

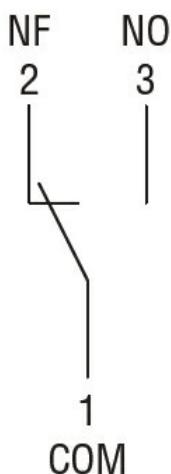

Certifications and compliance

Compliance

CSA C22.2 n° 14.

IEC/EN 60947-1

IEC/EN 60947-5-1

IEC/EN 61058-1

UL508

Certificates

cURus

EAC

ETIM classification

ETIM 8.0

EC000030 - End
switch