





Product designation	Metal lever		
Product type designation	KSL1		
<b>General characteristics</b>			
Material	Housing Polymer thermoplastic		
<b>Contact characteristics</b>			
Type of contact	1NO/NC		
Thermal current $I_{th}$	A 15		
IEC/EN 60947-5-1 designation	A600 P300		
Rated insulation voltage $U_i$	V 250		
Switching speed	min	m/s	0.01
	max	m/s	1
Operating speed	min	m/s	0.05
	max	m/s	1
IEC Conventional free air thermal current $I_{th}$	A 15		
Resistance per pole (average value)	m? <15		
Conductivity	10mA 5V		
<b>Mechanical features</b>			
Terminals type	Faston		
Operating head fixing	Fixed		
Operating torque	N ozin	6.4 23	
Weight	g	37	
<b>Operations</b>			
Mechanical life	cycles	20000000	
Electrical life	cycles	500000	
Mechanical operation	cycles/h	240	
<b>Ambient conditions</b>			
Temperature	Operating temperature		
	min	°C	-25
	max	°C	+70
Storage temperature	min	°C	-40
	max	°C	+70
<b>Resistance &amp; Protection</b>			
IP degree	Body housing IP00 or IP20 with terminal shroud		
Pollution degree	3		
Dimensions			

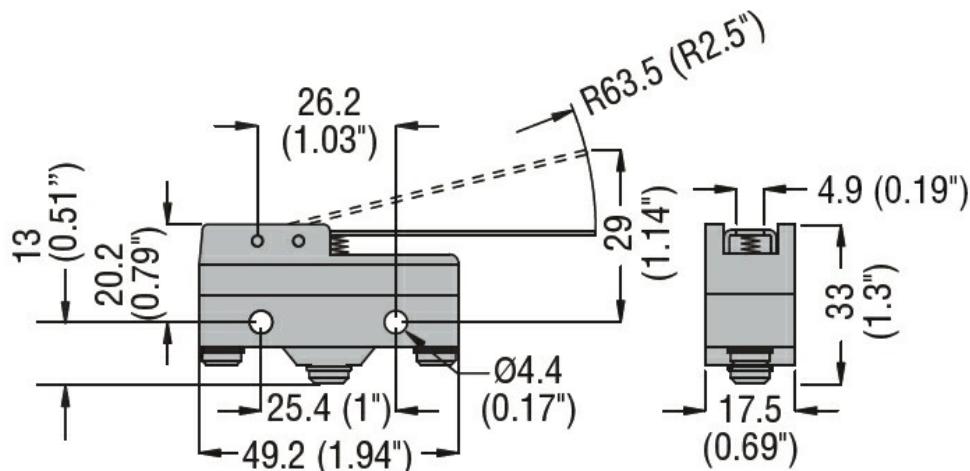

#### Wiring diagrams

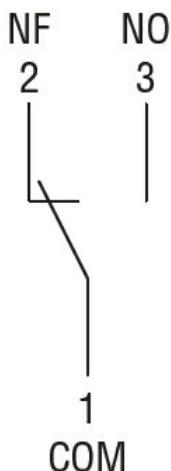

#### Certifications and compliance

##### Compliance

CSA C22.2 n° 14.

IEC/EN 60947-1

IEC/EN 60947-5-1

IEC/EN 61058-1

UL508

##### Certificates

cURus

EAC

#### ETIM classification

ETIM 8.0

EC000030 - End  
switch