



Product designation

Pushbutton
actuator, spring
return

Product type designation

LPCB30

General characteristics

Colour

Blue

Type of positions

Shrouded

Material

Polyamide

IEC degree of protection

IP66, IP67 and
IP69K

Mechanical features

Operating force

kg-lb <0.5Kg / 1.1lb

Mechanical life - spring return actuators

cycles 5000000

Mechanical life - Push-Push actuators

cycles 500000

Fixing

Without mounting
adapter

Mounting adapter

LPXAU120

Weight

g 27

UL technical data

UL degree of protection

Type1, 2, 3R, 4,
4X, 12, 12K

Ambient conditions

Temperature


Operating temperature

	min	°C	-25
	max	°C	+70

Storage temperature

	min	°C	-40
	max	°C	+85

Dimensions

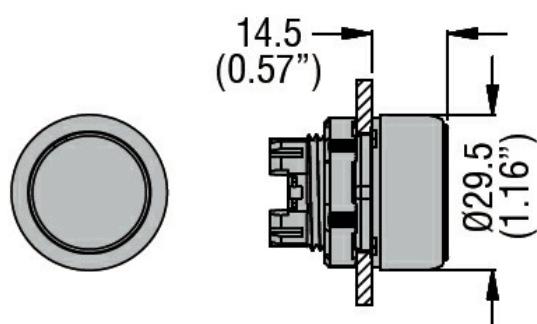

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

UL508

Certificates

CCC

cULus

EAC

RINA

ETIM classification

ETIM 8.0

EC000221 -
Front element for
push button