**Lovato electric**
ENERGY AND AUTOMATION



| | |
|---|---|
| Product designation | Double-touch actuators, spring return white indicator - One extended and one flush pushbuttons |
| Product type designation | LPCBL72 |

| General characteristics | |
|---|---|
| Colour | White/Black |
| Type of positions | I - O |
| Material | Polyamide |
| IEC degree of protection | IP66, IP67 and IP69K |

| Mechanical features | | |
|---|---|---|
| Operating force | kg-lb | <0.5Kg / 1.1lb |
| Mounting adapter | | LPXAU120 |
| Weight | g | 30 |

| UL technical data | |
|---|---|
| UL degree of protection | Type1, 2, 3R, 4, 4X, 12, 12K |

| Ambient conditions | | | |
|---|---|---|---|
| Temperature | | | |
| Operating temperature | | | |
| | min | °C | -25 |
| | max | °C | +70 |
| Storage temperature | | | |
| | min | °C | -40 |
| | max | °C | +85 |

## Dimensions
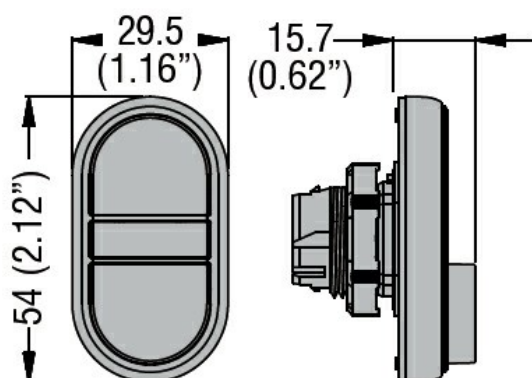


| Certifications and compliance | |
|---|---|
| Compliance | CSA C22.2 n° 14 |
| | IEC/EN/BS 60947-1 |

LPCBL7224

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

1 / 2

**LPCBL7224**

DOUBLE-TOUCH ACTUATOR, SPRING RETURN, WHITE INDICATOR Ø22MM PLATINUM SERIES CHROMED PLASTIC, 1 EXTENDED AND 1 FLUSH PUSHBUTTONS. BOTH SPRING RETURN, WHITE - BLACK/I - 0

| | | |
|---|---|---|
| | IEC/EN/BS 60947-5-1 | |
| | UL508 | |
| Certificates | | |
| | CCC | |
| | cULus | |
| | EAC | |
| | RINA | |

## ETIM classification

| | | |
|---|---|---|
| ETIM 8.0 | | EC000221 - Front element for push button |