



Double-touch  
actuators, spring  
return white  
indicator - One  
extended and  
one flush  
pushbuttons  
LPCBL72

## Product designation

## Product type designation

### General characteristics

Colour	Green/Red
Type of positions	Start / Stop
Material	Polyamide
IEC degree of protection	IP66, IP67 and IP69K

### Mechanical features

Operating force	kg-lb	<0.5Kg / 1.1lb
Mounting adapter		LPXAU120
Weight	g	30

### UL technical data

UL degree of protection	Type1, 2, 3R, 4, 4X, 12, 12K
-------------------------	------------------------------

### Ambient conditions

#### Temperature


#### Operating temperature

min	°C	-25
max	°C	+70

#### Storage temperature

min	°C	-40
max	°C	+85

### Dimensions

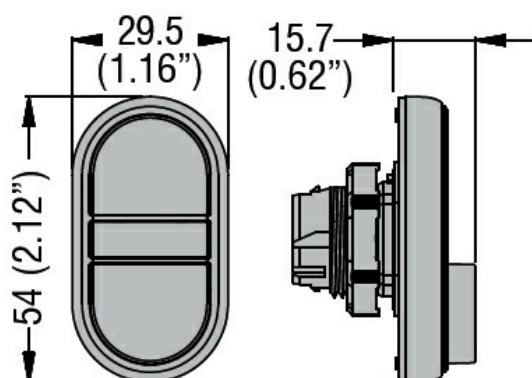

### Certifications and compliance

#### Compliance

CSA C22.2 n° 14  
IEC/EN/BS 60947-1

DOUBLE-TOUCH ACTUATOR, SPRING RETURN, WHITE INDICATOR Ø22MM PLATINUM  
SERIES CHROMED PLASTIC, 1 EXTENDED AND 1 FLUSH PUSHBUTTONS. BOTH SPRING  
RETURN, GREEN - RED/START - STOP

IEC/EN/BS 60947-5-1

UL508

Certificates

CCC

cULus

EAC

RINA

ETIM classification

ETIM 8.0

EC000221 -  
Front element for  
push button