





Product designation		Monoblock potentiometers		
Product type designation		LPCPA		
General characteristics				
Resistance value	KO	5		
Material	Polyamide - Resistive material: cermet			
IEC degree of protection	IP66, IP67; IP96K on front and IP20 on rear			
Electrical characteristics				
Rated insulation voltage Ui IEC/EN	V	250VAC		
Rated impulse withstand voltage Uimp	kV	4		
Max power	W	1		
Mechanical features				
Mechanical travel	°	290		
Weight	g	40		
UL technical data				
UL degree of protection	1, 2, 3R, 4, 4X, 12, 12K on front			
Ambient conditions				
Temperature	Operating temperature	min	°C	-25
		max	°C	+70
	Storage temperature	min	°C	-40
		max	°C	+85
		Resistance & Protection		
	Resistance tolerance	%	±10%	
Dimensions				

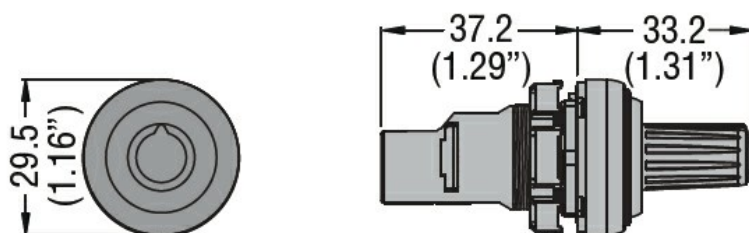

Wiring diagrams

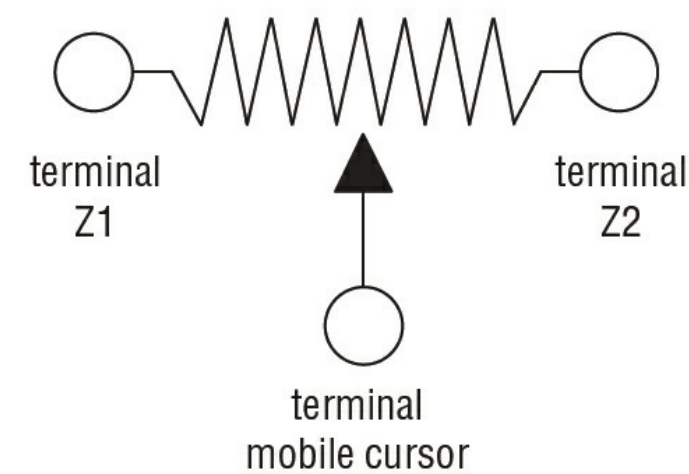

Certifications and compliance

Compliance	CSA C22.2 n° 14
	IEC/EN/BS 60947-1
	IEC/EN/BS 60947-5-1
	UL508

Certificates	CCC
	cULus
	EAC

ETIM classification

ETIM 8.0	EC001027 - Potentiometer for command devices
----------	---